SILVERTECH 銀科工業

(2011年03版)

銀科工業的承諾

產品售后服務

ISO 9001-2008 Reg. No. 059-A
Certificate No.:AJA02/5717

所有經銀科工業售出的產品均享有一年產品質量保證，以及14天内退換保證 (以出貨日期爲準)
如在正常使用和正確安裝的情況下出現損壞，我們定會爲您提供免費換貨

香港總公司:
銀科工業(香港)有限公司
香港荃灣沙咀道66A號豪力中心2108室
電話: (852) 2499 9168
傳真: (852) 2417 9183 8343 6887
電郵: sales@silvertech.com.hk
網址: www.silvertech.com.hk

Hong Kong Headquarters: (For Import & Export Sales)
Silvertech Industrial (H.K.) Ltd.
Rm.2108, Ho Lik Centre, 66A Sha Tsui Road, Tsuen Wan, Hong Kong.
Tel : (852) 2499 9168
Fax: (852) 2417 9183 8343 6887
Email: sales@silvertech.com.hk
Web Site: www.silvertech.com.hk

東莞分公司:
東莞動力銀科工業配件有限公司
東莞市塘廈鎮橋瓏大道23號銀科大樓
電話: (86–769) 8798 1699 8798 2699
8625 2718 (10线)
傳真: (86–769) 8798 1313 8625 2719
電郵: dgoffice@silvertech.com.hk

China Guangdong Branch Office: (For Domestic Sales)
Silvertech Industrial (Dong Guan) Ltd.
Silvertech Building, 23 Qiao Long Road, Tangxia, Dongguan, Guangdong, China.
Tel: (86–769) 8798 1699 8798 2699
8625 2718 (10Lines)
Fax: (86–769) 8798 1313 8625 2719
Email: dgoffice@silvertech.com.hk

青島辦事處:
青島市市南區寧夏路268號商務樓B413室
電話: (86–532) 8575 5305
傳真: (86–532) 8571 5015
電郵: qdoffice@silvertech.com.hk

China Qingdao Sales Office: (For Domestic Sales)
Rm.B413, No, 268,Ningxia Road,Qingdao ,Shandong,China
Tel : (86–532) 8575 5305
Fax : (86–532) 8571 5015
Email: qdoffice@silvertech.com.hk

深圳工廠:
銀鎂德傳動件制造(深圳)有限公司

China Shen Zhen Factory:
Madler–Silvertech Power Transmission Components (Shen Zhen) Ltd.

成都工廠:
成都銀科同步帶輪制造有限公司

China Cheng Du Factory:
Cheng Du Silvertech Timing Pulleys Manufacturing Ltd.

常州工廠:
常州銀科傳動件有限公司

China Chang Zhou Factory:
Chang Zhou Silvertech Power Transmission Products Ltd.

服務投訴電話：(852) 2499 9168、(86) 138 2697 1737

SILVERTECH 銀科工業

www.silvertech.com.hk

專業制造

STI

SILVERTECH 銀科工業

STI 高品質傳動件 High Quality Power Transmission Products
www.silvertech.com.hk

選銀科工業 • 做最好機械
Your 1st choice for Industrial Products

ISO 9001-2008 Reg. No. 059-A
Certificate No.:AJA02/5717

公司簡介

銀科工業(香港)有限公司－－成立于1992年，總部位于香港，分公司和工廠設于中國內地。公司的主要業務及經營范圍:生產 STI 品牌屬下的高質量工業傳動零部件，出口外銷至歐美及其它世界各國，同時也內銷至大中華地區。此外，我們還進口德國、瑞士、意大利、美國、日本和台灣等國家和地區的高科技工業産品，並且是這些世界級著名品牌的大中華區域總代理。

累積近乎二十年服務海外和大中華客戶的經驗，我們不斷的總結、不斷發展、不斷進步，因此而奠下了堅實的基礎，在海內外業界均享有優良的聲譽和知名度。銀科工業無論由:原材料采購－－生産管理－－質量控製－－倉存量控製－－銷售方式－－技術支援－－包裝付運－－跟蹤到貨－－售后服務等等，每一環節都務求做到盡善盡美，因爲我們切身體會只有得到客戶的信賴才是公司發展的最大希望!

在系統化的在職培訓再加上員工對公司的歸屬感，大家分別工作于香港、東莞、深圳、青島、成都和常州，今天的銀科工業已擁有一支非常專業且盡責的團隊，爲國內外工業界提供優質産品，爲貼近客戶而盡我們所能！

“選銀科工業 做最好機械” 這不僅是我們的承諾，更是對客戶的責任。

About us

Silvertech Industrial (HK) Ltd was established in 1992, with its headquarter in Hong Kong, and branches as well as factories in mainland China. Our business focuses on the production of high quality power transmission parts under the brand STI.

Our products are very popular in the global markets, such as Europe, North American, and Greater China Area. In addition, we are the exclusive dealer in the Greater China Area for a few world-renowned high tech industrial products from Germany, Switzerland, Italy, USA, Japan and Taiwan.

We are growing stronger with almost twenty years experience of serving clients in overseas and Greater China Area. Silvertech Industrial has well developed world reputation and brand loyalty. We arm to provide perfection in our value net, such as procurement of material, production management, quality control, stock and storage, marketing, technical support, logistics, and after sale service. It is our ultimate goal to maintain the trust from our clients and continue with sustainable growth.

Our company engages in systemic on the job training and invests in corporate human resource. We have developed an extremely competent and dedicated team working in Hong Kong, Dongguan, Shenzhen, Qingdao, Chengdu, and Changzhou. We are known as the company providing the best products and service for our customers.

Our promise: **Silvertech – Your 1st choice for Industrial Products**
We take this promise as our responsibility.

公司秉承“准時、准確、高質量爲客户服務”即二准一高的質量方針，將不斷總結和提高對客户服務的質量。

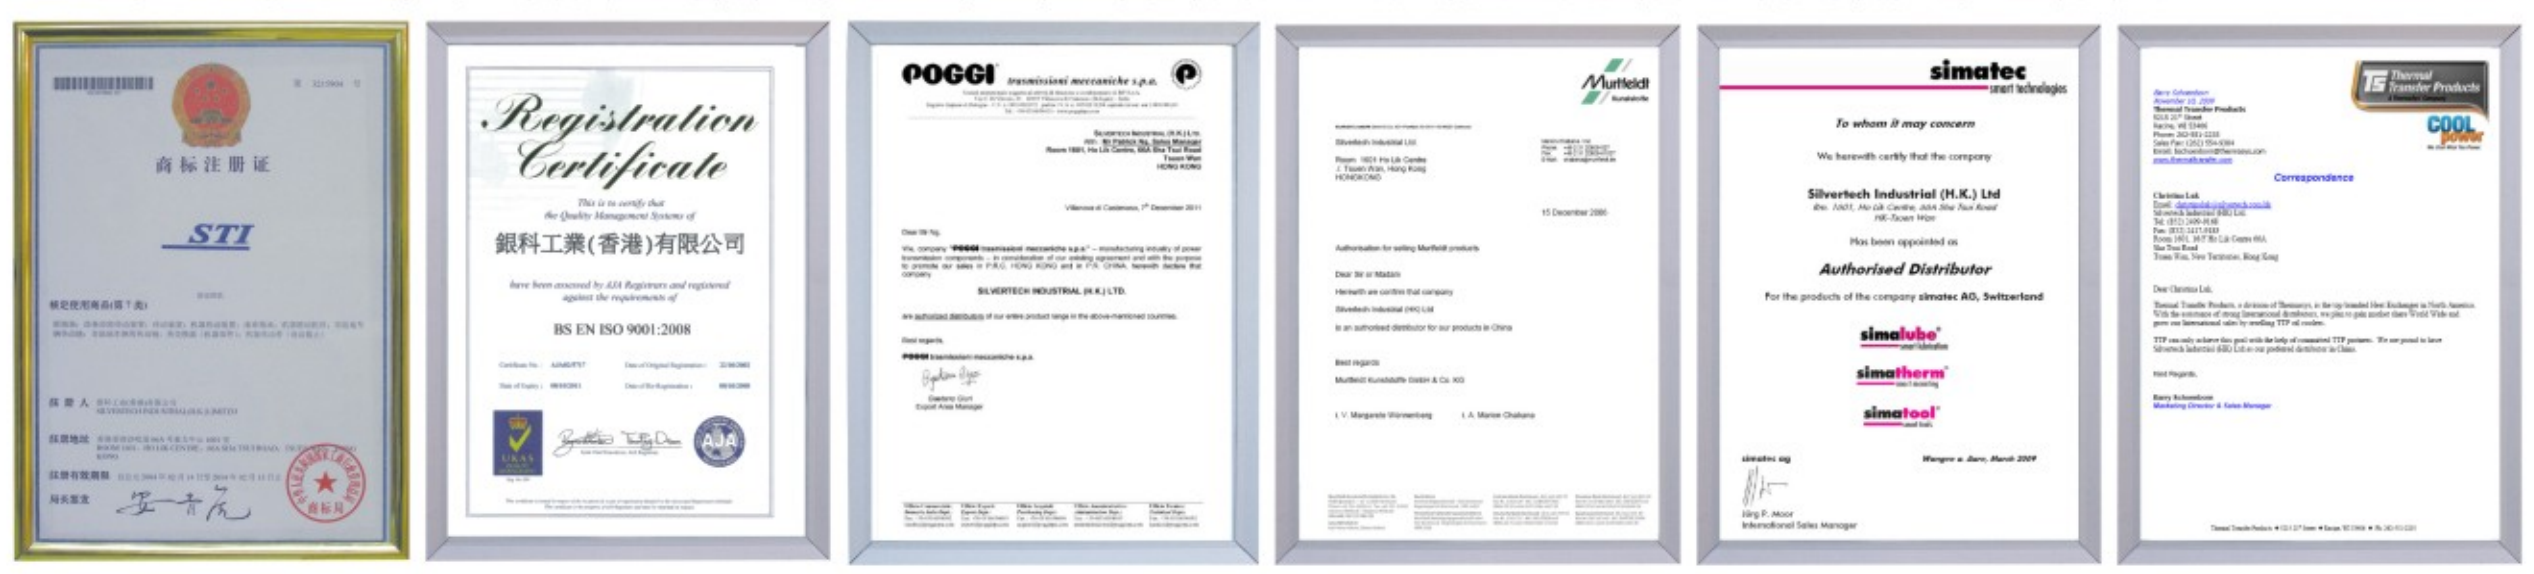

SILVERTECH 銀科工業

目錄 Directory

www.silvertech.com.hk

®STI 高品質焊接式凸臺鏈輪

WELD FINISH SPROCKETS (ANSI)



The smaller spockets are to be welded as shown as the weld will not interfere with the chain



The larger sprockets are to be welded as shown.

All black oxide finish



V SERIES =1-1/8"

W SERIES =1-5/8"

X SERIES =2"

XX SERIES =2"

Y SERIES =2-3/4"

We recommend to use Low Hydrogen Electrodes for welding sprocket parts.

No. of Teeth	ANSI-35	ANSI-41 (DIN,ISO Nr.085)	ANSI-40 (DIN,ISO Nr.08A)	ANSI-50 (DIN,ISO Nr.10A)	ANSI-60 (DIN,ISO Nr.12A)	ANSI-80 (DIN,ISO Nr.16A)	ANSI-100 (DIN,ISO Nr.20A)
	CHAIN PITCH 3/8"	CHAIN PITCH 1/2"	CHAIN PITCH 1/2"	CHAIN PITCH 5/8"	CHAIN PITCH 3/4"	CHAIN PITCH 1"	CHAIN PITCH 1-1/4"
9					60 V 09	80 W 09	
10				50 V 10	60 V 10	80 W 10	100 X 10
11				50 V 11	60 W 11	80 W 11	100 X 11
12		41 V 12	41 V 12	50 W 12	60 W 12	80 X 12	100 X 12
13		41 V 13	41 V 13	50 W 13	60 W 13	80 X 13	100 X 13
14		41 V 14	41 V 14	50 W 14	60 W 14	80 X 14	100 Y 14
15	35 V 15	41 V 15	41 V 15	50 W 15	60 X 15	80 X 15	100 Y 15
16	35 V 16	41 W 16	41 W 16	50 W 16	60 X 16	80 X 16	100 Y 16
17	35 V 17	41 W 17	41 W 17	50 X 17	60 X 17	80 X 17	100 Y 17
18	35 V 18	41 W 18	41 W 18	50 X 18	60 X 18	80 X 18	100 Y 18
19	35 V 19	41 W 19	41 W 19	50 X 19	60 X 19	80 X 19	100 Y 19
20	35 V 20	41 W 20	40 X 20	50 X 20	60 X 20	80 X 20	100 Y 20
21	35 V 21	41 W 21	40 X 21	50 X 21	60 X 21	80 X 21	100 Y 21
22	35 W 22	41 W 22	40 X 22	50 X 22	60 X 22	80 X 22	100 Y 22
23	35 W 23	41 W 23	40 X 23	50 X 23	60 X 23	80 X 23	100 Y 23
24	35 W 24	41 W 24	40 X 24	50 X 24	60 X 24	80 X 24	100 Y 24
25	35 W 25	41 W 25	40 X 25	50 X 25	60 X 25	80 X 25	100 Y 25
26	35 W 26	41 W 26	40 X 26	50 X 26	60 X 26	80 X 26	100 Y 26
27	35 W 27	41 W 27	40 X 27	50 X 27	60 X 27	80 X 27	
28	35 W 28	41 W 28	40 X 28	50 X 28	60 X 28	80 X 28	100 Y 28
29	35 W 29	41 W 29	40 X 29	50 X 29	60 X 29	80 X 29	
30	35 W 30	41 W 30	40 X 30	50 X 30	60 X 30	80 X 30	100 Y 30
31	35 W 31	41 W 31	40 X 31	50 X 31	60 X 31		
32	35 W 32	41 W 32	40 X 32	50 X 32	60 X 32	80 X 32	100 Y 32
33	35 W 33	41 W 33	40 X 33	50 X 33	60 X 33	80 X 33	
34	35 W 34	41 W 34	40 X 34	50 X 34	60 X 34	80 X 34	
35	35 W 35	41 W 35	40 X 35	50 X 35	60 X 35	80 X 35	100 Y 35
36	35 W 36	41 W 36	40 X 36	50 X 36	60 X 36	80 X 36	100 Y 36
37	35 W 37	41 W 37	40 X 37	50 X 37	60 X 37		
38	35 W 38	41 W 38	40 X 38	50 X 38	60 X 38		
39	35 W 39	41 W 39	40 X 39	50 X 39	60 X 39		
40	35 W 40	41 W 40	40 X 40	50 X 40	60 X 40	80 X 40	
42	35 W 42	41 W 42	40 X 42	50 X 42	60 X 42		
43	35 W 43	41 W 43	40 X 43	50 X 43	60 X 43		
44	35 W 44	41 W 44	40 X 44	50 X 44	60 X 44		
45	35 W 45	41 W 45	40 X 45	50 X 45	60 X 45	80 X 45	
48	35 W 48	41 W 48	40 X 48	50 X 48	60 X 48	80 X 48	
50	35 W 50	41 W 50	40 X 50	50 X 50	60 X 50		
54	35 W 54	41 W 54	40 X 54	50 X 54	60 X 54		
60	35 W 60	41 W 60	40 X 60	50 X 60	60 X 60	80 X 60	
70	35 W 70	41 W 70	40 X 70	50 X 70	60 X 70		
72	35 W 72	41 W 72	40 X 72	50 X 72	60 X 72		
80	35 W 80	41 W 80	40 X 80	50 X 80	60 X 80		
84	35 W 84	41 W 84	40 X 84	50 X 84	60 X 84		
96	35 W 96	41 W 96	40 X 96	50 X 96	60 X 96		

▲Sprockets for BS standard chain No.06B～20B are manufactured upon request.

SILVERTECH 銀科工業

®STI 高品質同步帶輪

HIGH QUALITY TIMING BELT PULLEY

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

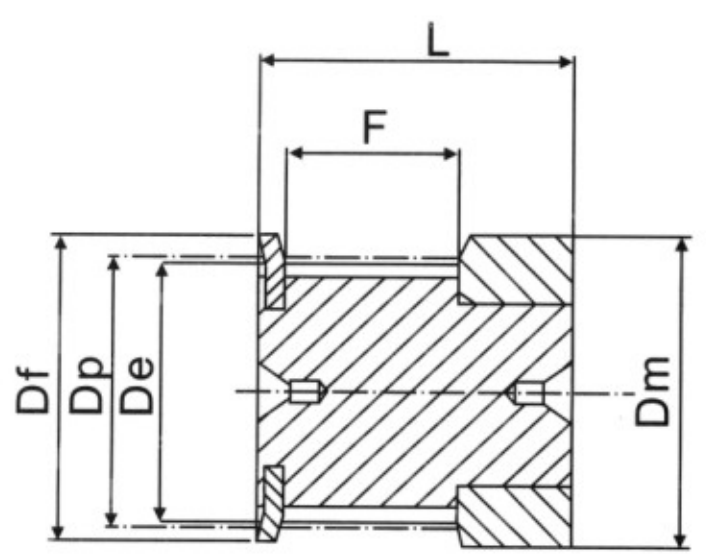

TYPE 型式 0F

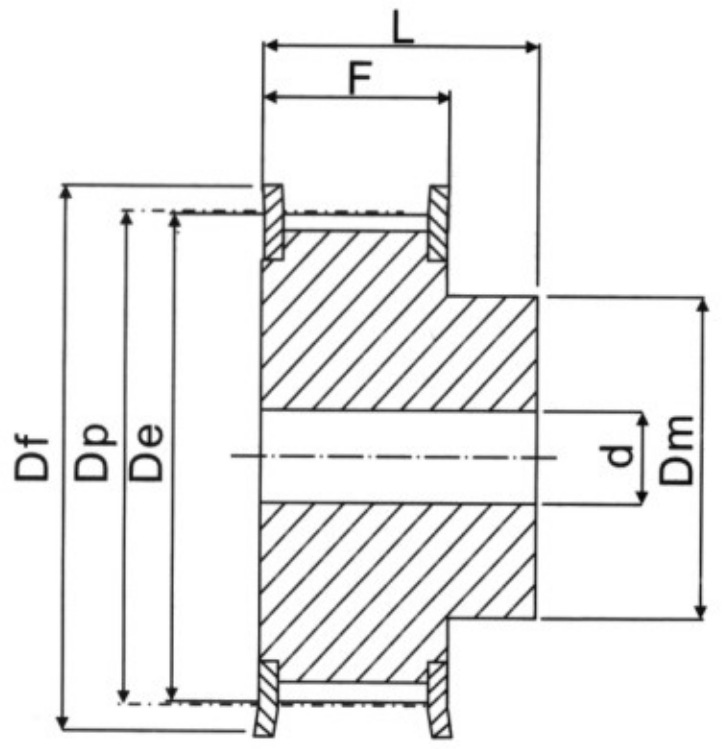

TYPE 型式 1F

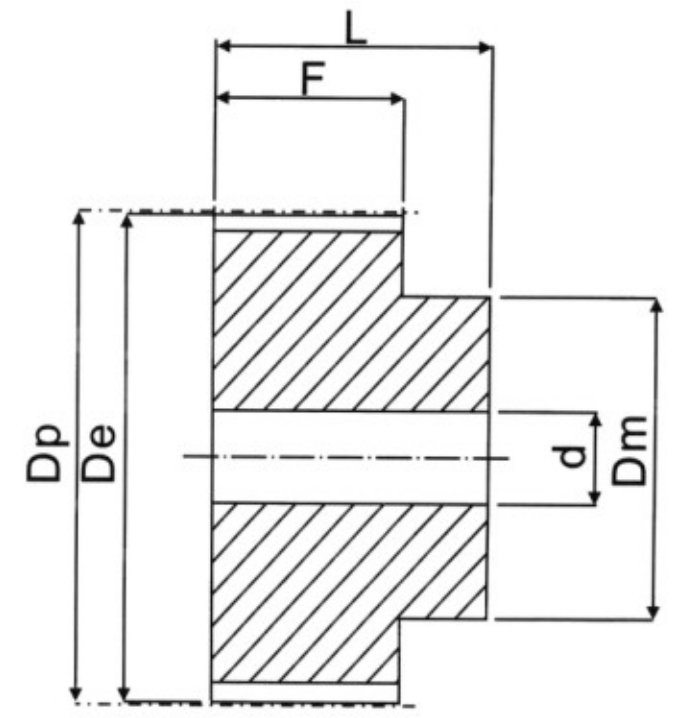

TYPE 型式 2

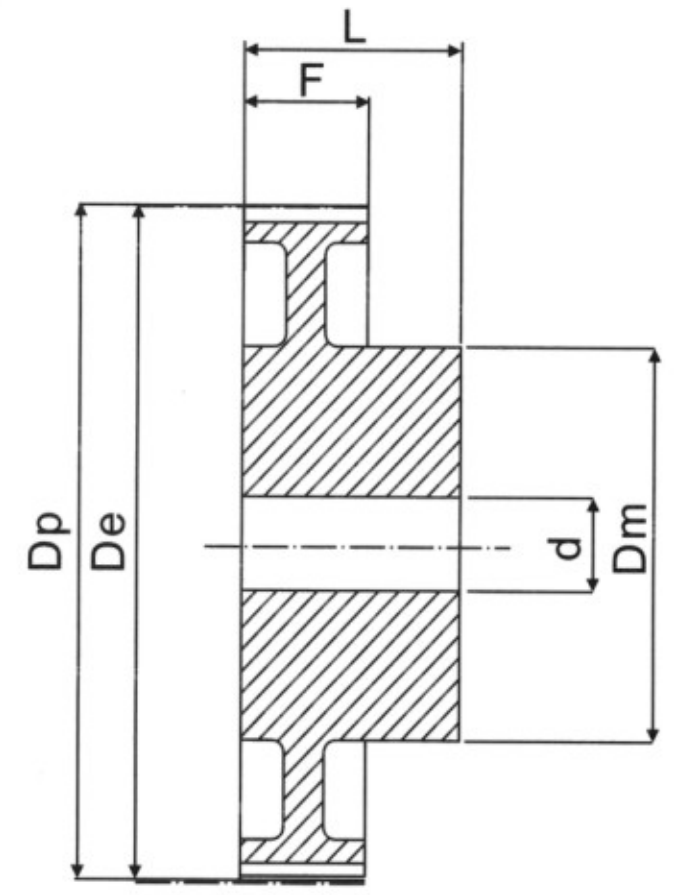

TYPE 型式 3

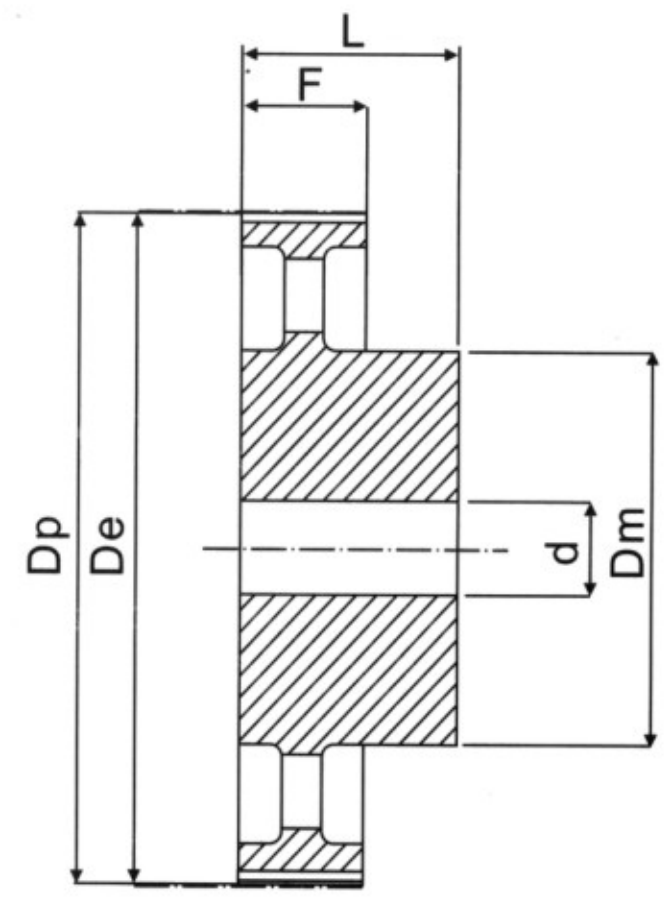

TYPE 型式 4

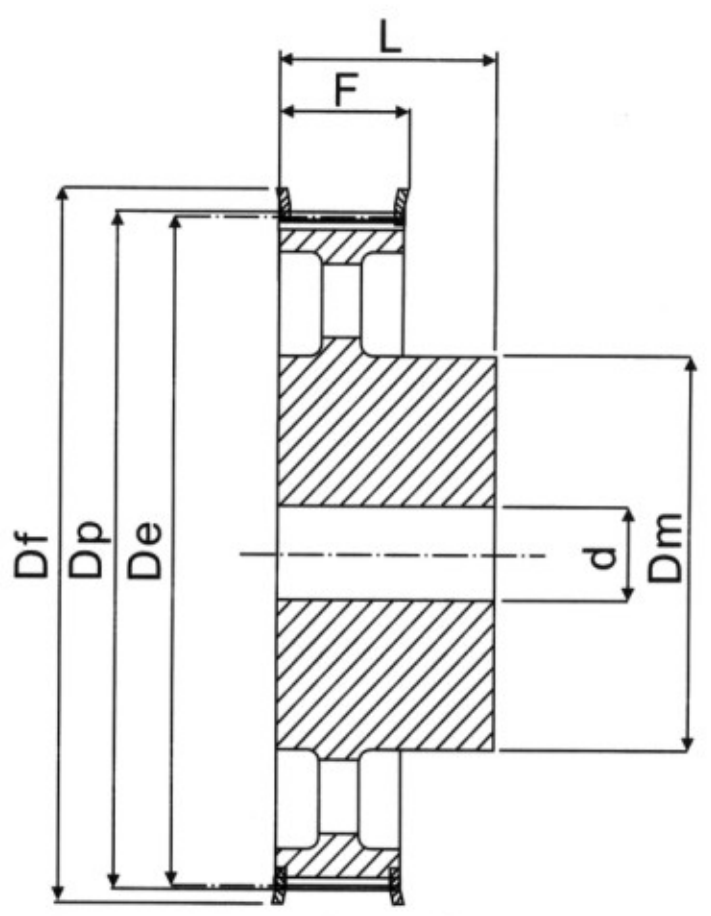

TYPE 型式 5F

MXL 025 PITCH 節距 0.080"(2.032mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	WITH FLANGE 有擋圈	16 MXL 025	0F	16	10.35	9.84	15	15	8.5	16	-
		18 MXL 025	0F	18	11.64	11.12	16	16	8.5	16	-
		20 MXL 025	0F	20	12.94	12.43	16	16	8.5	16	-
		22 MXL 025	1F	22	14.23	13.72	17.5	10	11	16	3
		24 MXL 025	1F	24	15.52	15.01	20	10	11	16	3
		28 MXL 025	1F	28	18.11	17.60	25	11	11	16	3
		30 MXL 025	1F	30	19.40	18.90	25	12	11	16	4
		32 MXL 025	1F	32	20.70	20.19	26	14	11	16	4
		36 MXL 025	1F	36	23.29	22.78	28	16	11	16	4
		40 MXL 025	1F	40	25.87	25.37	32	18	11	16	4
		42 MXL 025	1F	42	27.17	26.67	32	18	11	16	5
		44 MXL 025	1F	44	28.46	27.95	36	18	11	16	5
	WITHOUT FLANGE 無擋圈	48 MXL 025	2	48	31.05	30.54	-	20	11	16	5
		60 MXL 025	2	60	38.81	38.30	-	24	11	16	5
		72 MXL 025	2	72	46.57	46.06	-	25	11	16	6

同步帶輪系列 TIMING PULLEY

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

XL 037 PITCH 節距 1/5"(5.08mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUN 鋁	WITH FLANGE 有擋圈	10 XL 037	1F	10	16.17	15.66	23	9.5	14.3	20	-
		11 XL 037	1F	11	17.79	17.28	23	9.5	14.3	20	-
		12 XL 037	1F	12	19.4	18.9	25	10	14.3	20	-
		13 XL 037	1F	13	21.02	20.51	25	10	14.3	20	-
		14 XL 037	1F	14	22.64	22.13	28	15	14.3	20	-
		15 XL 037	1F	15	24.26	23.75	28	15	14.3	20	-
		16 XL 037	1F	16	25.87	25.36	32	16	14.3	20	-
		17 XL 037	1F	17	27.49	26.98	32	20	14.3	20	-
		18 XL 037	1F	18	29.11	28.6	35	20	14.3	20	-
		19 XL 037	1F	19	30.72	30.22	35	20	14.3	22	-
		20 XL 037	1F	20	32.34	31.83	38	23.5	14.3	22	-
		21 XL 037	1F	21	33.96	33.45	38	23.5	14.3	22	-
		22 XL 037	1F	22	35.57	35.07	41	25	14.3	22	6
		24 XL 037	1F	24	38.81	38.3	44	30	14.3	22	6
		26 XL 037	1F	26	42.04	41.53	48	30	14.3	22	8
		27 XL 037	1F	27	43.66	43.15	48	30	14.3	22	8
		28 XL 037	1F	28	45.28	44.77	51	34	14.3	22	8
		30 XL 037	1F	30	48.51	48	54	38	14.3	22	8
		32 XL 037	1F	32	51.74	51.24	57	38	14.3	25	8
		34 XL 037	1F	34	54.98	54.47	61	38	14.3	25	8
		35 XL 037	1F	35	56.6	56.09	61	38	14.3	25	8
	WITHOUT FLANGE 無擋圈	36 XL 037	2	36	58.21	57.7	-	45	14.3	25	8
		38 XL 037	2	38	61.45	60.94	-	45	14.3	25	8
		40 XL 037	2	40	64.68	64.17	-	45	14.3	25	8
		42 XL 037	2	42	67.91	67.41	-	45	14.3	25	8
		44 XL 037	2	44	71.15	70.64	-	45	14.3	25	8
		48 XL 037	3	48	77.62	77.11	-	45	14.3	25	10
		60 XL 037	3	60	97.02	96.51	-	45	14.3	25	10
		72 XL 037	3	72	116.42	115.92	-	45	14.3	25	10

同步帶輪系列 TIMING PULLEY

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

L 050 PITCH 節距 3/8"(9.52mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	10 L 050	1F	10	30.33	29.56	37.0	20	19.0	28	8
		11 L 050	1F	11	33.35	32.59	37.0	22	19.0	30	8
		12 L 050	1F	12	36.37	35.62	43.0	24	19.0	30	8
		13 L 050	1F	13	39.41	38.65	44.0	28	19.0	30	8
		14 L 050	1F	14	42.44	41.68	48.0	28	19.0	30	8
		15 L 050	1F	15	45.48	44.72	51.0	34	19.0	30	8
		16 L 050	1F	16	48.51	47.75	54.0	36	19.0	32	8
		17 L 050	1F	17	51.54	50.78	57.0	36	19.0	32	10
		18 L 050	1F	18	54.59	53.81	60.0	40	19.0	32	10
		19 L 050	1F	19	57.61	56.84	64.0	40	19.0	32	10
		20 L 050	1F	20	60.63	59.88	66.5	40	19.0	32	10
		21 L 050	1F	21	63.68	62.91	70.0	45	19.0	32	10
		22 L 050	1F	22	66.70	65.94	75.0	45	19.0	32	10
		23 L 050	1F	23	69.73	68.97	79.0	55	19.0	32	10
		24 L 050	1F	24	72.77	72.00	79.0	55	19.0	32	10
		25 L 050	1F	25	75.80	75.04	82.5	58	19.0	32	10
		26 L 050	1F	26	78.84	78.07	86.0	58	19.0	32	11
		27 L 050	1F	27	81.86	81.10	86.0	58	19.0	32	11
		28 L 050	1F	28	84.89	84.13	91.0	58	19.0	32	11
		30 L 050	1F	30	90.96	90.20	97.0	70	19.0	32	11
		32 L 050	1F	32	97.03	96.26	102.0	70	19.0	32	11
		33 L 050	1F	33	100.05	99.29	106.0	70	19.0	32	11
		34 L 050	1F	34	103.08	102.32	112.0	70	19.0	32	11
		35 L 050	1F	35	106.12	105.35	112.0	70	19.0	32	11
		36 L 050	1F	36	109.14	108.39	115.0	70	19.0	32	11
		40 L 050	1F	40	121.29	120.51	128.0	70	19.0	32	11
		42 L 050	1F	42	127.34	126.57	135.0	70	19.0	32	11
		44 L 050	1F	44	133.40	132.64	142.0	70	19.0	32	11
		45 L 050	1F	45	136.44	135.67	142.0	70	19.0	32	11
		48 L 050	1F	48	145.54	144.77	150.0	70	19.0	32	11
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	50 L 050	4	50	151.60	150.83	-	70	19.0	32	14
		52 L 050	4	52	157.66	156.90	-	70	19.0	32	14
		56 L 050	4	56	169.79	169.02	-	70	19.0	32	14
		57 L 050	4	57	172.82	172.06	-	70	19.0	32	14
		60 L 050	4	60	181.92	181.15	-	75	19.0	42	14
		72 L 050	4	72	218.29	217.53	-	75	19.0	42	14
		84 L 050	4	84	254.69	253.92	-	75	19.0	42	14
		96 L 050	4	96	291.06	290.30	-	75	19.0	42	14

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

同步帶輪系列 TIMING PULLEY

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

L 075 PITCH 節距 3/8"(9.52mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	10 L 075	1F	10	30.33	29.56	37.0	20	25.4	38	8
		11 L 075	1F	11	33.35	32.59	37.0	22	25.4	38	8
		12 L 075	1F	12	36.37	35.62	43.0	24	25.4	38	8
		13 L 075	1F	13	39.41	38.65	44.0	28	25.4	38	8
		14 L 075	1F	14	42.44	41.68	48.0	28	25.4	38	11
		15 L 075	1F	15	45.48	44.72	51.0	34	25.4	38	11
		16 L 075	1F	16	48.51	47.75	54.0	36	25.4	38	11
		17 L 075	1F	17	51.54	50.78	57.0	36	25.4	38	11
		18 L 075	1F	18	54.59	53.81	60.0	40	25.4	38	11
		19 L 075	1F	19	57.61	56.84	64.0	40	25.4	38	11
		20 L 075	1F	20	60.63	59.88	66.5	40	25.4	38	11
		21 L 075	1F	21	63.68	62.91	70.0	45	25.4	38	11
		22 L 075	1F	22	66.70	65.94	75.0	45	25.4	38	11
		23 L 075	1F	23	69.73	68.97	79.0	55	25.4	38	11
		24 L 075	1F	24	72.77	72.00	79.0	55	25.4	38	11
		25 L 075	1F	25	75.80	75.04	82.5	58	25.4	38	11
		26 L 075	1F	26	78.84	78.07	86.0	58	25.4	38	11
		27 L 075	1F	27	81.86	81.10	86.0	58	25.4	38	11
		28 L 075	1F	28	84.89	84.13	91.0	58	25.4	38	11
		30 L 075	1F	30	90.96	90.20	97.0	70	25.4	38	11
		32 L 075	1F	32	97.03	96.26	102.0	70	25.4	38	11
		33 L 075	1F	33	100.05	99.29	106.0	70	25.4	38	11
		34 L 075	1F	34	103.08	102.32	112.0	70	25.4	38	11
		35 L 075	1F	35	106.12	105.35	112.0	70	25.4	38	11
		36 L 075	1F	36	109.14	108.39	115.0	70	25.4	38	11
		40 L 075	1F	40	121.29	120.51	128.0	70	25.4	38	11
		42 L 075	1F	42	127.34	126.57	135.0	70	25.4	38	11
		44 L 075	1F	44	133.40	132.64	142.0	70	25.4	38	11
		45 L 075	1F	45	136.44	135.67	142.0	70	25.4	38	11
		48 L 075	1F	48	145.54	144.77	150.0	70	25.4	38	11
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	50 L 075	4	50	151.60	150.83	-	70	25.4	38	14
		52 L 075	4	52	157.66	156.90	-	70	25.4	38	14
		56 L 075	4	56	169.79	169.02	-	70	25.4	38	14
		57 L 075	4	57	172.82	172.06	-	70	25.4	38	14
		60 L 075	4	60	181.92	181.15	-	75	25.4	45	14
		72 L 075	4	72	218.29	217.53	-	75	25.4	45	14
		84 L 075	4	84	254.69	253.92	-	75	25.4	45	14
		96 L 075	4	96	291.06	290.30	-	75	25.4	45	14

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

同步帶輪系列 TIMING PULLEY

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

L 100 PITCH 節距 3/8"(9.52mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	10 L 100	1F	10	30.33	29.56	37.0	20	31.8	45	8
C45 STEEL 鋼	WITH FLANGE 有擋圈	11 L 100	1F	11	33.35	32.59	37.0	22	31.8	45	8
C45 STEEL 鋼	WITH FLANGE 有擋圈	12 L 100	1F	12	36.37	35.62	43.0	24	31.8	45	8
C45 STEEL 鋼	WITH FLANGE 有擋圈	13 L 100	1F	13	39.41	38.65	44.0	28	31.8	45	8
C45 STEEL 鋼	WITH FLANGE 有擋圈	14 L 100	1F	14	42.44	41.68	48.0	28	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	15 L 100	1F	15	45.48	44.72	51.0	34	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	16 L 100	1F	16	48.51	47.75	54.0	36	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	17 L 100	1F	17	51.54	50.78	57.0	36	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	18 L 100	1F	18	54.59	53.81	60.0	40	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	19 L 100	1F	19	57.61	56.84	64.0	40	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	20 L 100	1F	20	60.63	59.88	66.5	40	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	21 L 100	1F	21	63.68	62.91	70.0	45	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	22 L 100	1F	22	66.70	65.94	75.0	45	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	23 L 100	1F	23	69.73	68.97	79.0	55	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	24 L 100	1F	24	72.77	72.00	79.0	55	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	25 L 100	1F	25	75.80	75.04	82.5	58	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	26 L 100	1F	26	78.84	78.07	86.0	58	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	27 L 100	1F	27	81.86	81.10	86.0	58	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	28 L 100	1F	28	84.89	84.13	91.0	58	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	30 L 100	1F	30	90.96	90.20	97.0	70	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	32 L 100	1F	32	97.03	96.26	102.0	70	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	33 L 100	1F	33	100.05	99.29	106.0	70	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	34 L 100	1F	34	103.08	102.32	112.0	70	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	35 L 100	1F	35	106.12	105.35	112.0	70	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	36 L 100	1F	36	109.14	108.39	115.0	70	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	40 L 100	1F	40	121.29	120.51	128.0	70	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	42 L 100	1F	42	127.34	126.57	135.0	70	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	44 L 100	1F	44	133.40	132.64	142.0	70	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	45 L 100	1F	45	136.44	135.67	142.0	70	31.8	45	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	48 L 100	1F	48	145.54	144.77	150.0	70	31.8	45	11
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	50 L 100	4	50	151.60	150.83	-	70	31.8	45	14
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	52 L 100	4	52	157.66	156.90	-	70	31.8	45	14
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	56 L 100	4	56	169.79	169.02	-	70	31.8	45	14
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	57 L 100	4	57	172.82	172.06	-	70	31.8	45	14
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	60 L 100	4	60	181.92	181.15	-	75	31.8	45	14
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	72 L 100	4	72	218.29	217.53	-	75	31.8	45	14
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	84 L 100	4	84	254.69	253.92	-	75	31.8	45	14
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	96 L 100	4	96	291.06	290.30	-	75	31.8	45	14

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理**.

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

H 075 PITCH 節距 1/2"(12.7mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	14 H 075	1F	14	56.59	55.22	64.0	40	26.4	40	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	15 H 075	1F	15	60.64	59.27	66.5	45	26.4	40	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	16 H 075	1F	16	64.67	63.31	70.0	45	26.4	40	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	17 H 075	1F	17	68.72	67.35	75.0	45	26.4	40	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	18 H 075	1F	18	72.77	71.39	79.0	55	26.4	40	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	19 H 075	1F	19	76.81	75.44	82.5	60	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	20 H 075	1F	20	80.85	79.48	87.0	62	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	21 H 075	1F	21	84.89	83.52	91.0	65	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	22 H 075	1F	22	88.93	87.56	94.0	68	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	23 H 075	1F	23	92.98	91.61	97.0	72	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	24 H 075	1F	24	97.03	95.65	102.0	72	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	25 H 075	1F	25	101.06	99.69	106.0	72	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	26 H 075	1F	26	105.11	103.73	112.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	27 H 075	1F	27	109.15	107.78	115.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	28 H 075	1F	28	113.18	111.82	120.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	30 H 075	1F	30	121.29	119.90	128.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	32 H 075	1F	32	129.30	127.99	135.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	33 H 075	1F	33	133.40	132.03	142.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	34 H 075	1F	34	137.45	136.07	142.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	35 H 075	1F	35	141.49	140.12	150.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	36 H 075	1F	36	145.54	144.16	150.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	38 H 075	1F	38	153.62	152.24	158.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	40 H 075	1F	40	161.70	160.33	168.0	80	26.4	40	11
C45 STEEL 鋼	WITH FLANGE 有擋圈	42 H 075	1F	42	169.79	168.41	184.0	80	26.4	40	11
CAST IRON 鑄鐵	WITH FLANGE 有擋圈	44 H 075	5F	44	177.80	176.5	184.0	80	26.4	40	14
CAST IRON 鑄鐵	WITH FLANGE 有擋圈	48 H 075	5F	48	194.03	192.67	200.0	90	26.4	45	14
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	50 H 075	4	50	202.13	200.75	-	90	26.4	45	14

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理**.

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

H 100 PITCH 節距 1/2"(12.7mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	14 H 100	1F	14	56.59	55.22	64.0	40	31.8	45	-
		15 H 100	1F	15	60.64	59.27	66.5	45	31.8	45	-
		16 H 100	1F	16	64.67	63.31	70.0	45	31.8	45	-
		17 H 100	1F	17	68.72	67.35	75.0	45	31.8	45	-
		18 H 100	1F	18	72.77	71.39	79.0	55	31.8	45	-
		19 H 100	1F	19	76.81	75.44	82.5	60	31.8	45	14
		20 H100	1F	20	80.85	79.48	87.0	62	31.8	45	14
		21 H 100	1F	21	84.89	83.52	91.0	66	31.8	45	14
		22 H 100	1F	22	88.93	87.56	94.0	68	31.8	45	14
		23 H 100	1F	23	92.98	91.61	97.0	72	31.8	45	14
		24 H 100	1F	24	97.03	95.65	102.0	72	31.8	45	14
		25 H 100	1F	25	101.06	99.69	106.0	72	31.8	45	14
		26 H 100	1F	26	105.11	103.73	112.0	80	31.8	45	14
		27 H 100	1F	27	109.15	107.78	115.0	80	31.8	45	14
		28 H 100	1F	28	113.18	111.82	120.0	80	31.8	45	14
		29 H 100	1F	29	117.23	115.86	120.0	80	31.8	45	14
		30 H 100	1F	30	121.29	119.90	128.0	80	31.8	45	14
		32 H 100	1F	32	129.30	127.99	135.0	80	31.8	45	14
		33 H 100	1F	33	133.40	132.03	142.0	80	31.8	45	14
		34 H 100	1F	34	137.45	136.07	142.0	80	31.8	45	14
		35 H 100	1F	35	141.49	140.12	150.0	80	31.8	45	14
		36 H 100	1F	36	145.54	144.16	150.0	80	31.8	45	14
		38 H 100	1F	38	153.62	152.24	158.0	80	31.8	45	14
		40 H 100	1F	40	161.70	160.33	168.0	80	31.8	45	14
		42 H 100	1F	42	169.79	168.41	180.0	80	31.8	45	14
CAST IRON 鑄鐵		44 H 100	5F	44	177.88	176.50	184.0	80	31.8	50	14
		45 H 100	5F	45	181.91	180.54	192.0	80	31.8	50	14
		48 H 100	5F	48	194.03	192.67	200.0	90	31.8	50	14
	WITHOUT FLANGE 無擋圈	50 H 100	4	50	202.13	200.75	-	90	31.8	50	19
		52 H 100	4	52	210.21	208.84	-	90	31.8	50	19
		58 H 100	4	58	234.47	233.09	-	90	31.8	50	19
		60 H 100	4	60	242.55	241.18	-	120	31.8	50	19
		70 H 100	4	70	282.98	281.61	-	120	31.8	55	19
		72 H 100	4	72	291.06	289.68	-	120	31.8	55	19
		84 H 100	4	84	339.57	338.20	-	120	31.8	55	19
		96 H 100	4	96	388.09	386.71	-	120	31.8	60	19
		120 H 100	4	120	485.12	483.73	-	120	31.8	60	19

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

同步帶輪系列 TIMING PULLEY

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

H 150 PITCH 節距 1/2"(12.7mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DLA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	14 H 150	1F	14	56.59	55.22	64.0	42	46.0	58	-
		15 H 150	1F	15	60.64	59.27	66.5	45	46.0	58	-
		16 H 150	1F	16	64.67	63.31	70.0	45	46.0	58	-
		17 H 150	1F	17	68.72	67.35	75.0	45	46.0	58	-
		18 H 150	1F	18	72.77	71.39	79.0	55	46.0	58	-
		19 H 150	1F	19	76.81	75.44	82.5	60	46.0	58	-
		20 H 150	1F	20	80.85	79.48	87.0	62	46.0	58	-
		21 H 150	1F	21	84.89	83.52	91.0	65	46.0	58	-
		22 H 150	1F	22	88.93	87.56	94.0	68	46.0	58	-
		23 H 150	1F	23	92.98	91.61	97.0	72	46.0	58	-
		24 H 150	1F	24	97.03	95.65	102.0	72	46.0	58	-
		25 H 150	1F	25	101.06	99.69	106.0	72	46.0	58	-
		26 H 150	1F	26	105.11	103.73	112.0	80	46.0	58	-
		27 H 150	1F	27	109.15	107.78	115.0	80	46.0	58	-
		28 H 150	1F	28	113.18	111.82	120.0	80	46.0	58	-
		29 H 150	1F	29	117.23	115.86	120.0	80	46.0	58	-
		30 H 150	1F	30	121.29	119.90	128.0	80	46.0	58	-
		32 H 150	1F	32	129.30	127.99	135.0	80	46.0	58	-
		33 H 150	1F	33	133.40	132.03	142.0	80	46.0	58	-
		34 H 150	1F	34	137.45	136.07	142.0	80	46.0	58	-
		35 H 150	1F	35	141.49	140.12	150.0	80	46.0	58	-
		36 H 150	1F	36	145.54	144.16	150.0	80	46.0	58	-
		38 H 150	1F	38	153.62	152.24	158.0	80	46.0	58	-
		40 H 150	1F	40	161.70	160.33	168.0	80	46.0	58	-
		42 H 150	1F	42	169.79	168.41	180.0	80	46.0	58	-
CAST IRON 鑄鐵		44 H 150	5F	44	177.88	176.50	184.0	80	46.0	58	19
		45 H 150	5F	45	181.91	180.54	192.0	80	46.0	58	19
		48 H 150	5F	48	194.03	192.67	200.0	90	46.0	65	19
	WITHOUT FLANGE 無擋圈	50 H 150	4	50	202.13	200.75	-	90	46.0	65	19
		52 H 150	4	52	210.21	208.84	-	90	46.0	65	19
		58 H 150	4	58	234.47	233.09	-	90	46.0	65	19
		60 H 150	4	60	242.55	241.18	-	120	46.0	65	19
		70 H 150	4	70	282.98	281.61	-	120	46.0	65	24
		72 H 150	4	72	291.06	289.68	-	120	46.0	65	24
		84 H 150	4	84	339.57	338.20	-	120	46.0	65	24
		96 H 150	4	96	388.09	386.71	-	120	46.0	65	24
		120 H 150	4	120	485.12	483.73	-	120	46.0	65	24

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

同步帶輪系列 TIMING PULLEY

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

H 200 PITCH 節距 1/2"(12.7mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	14 H 200	1F	14	56.59	55.22	64.0	42	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	15 H 200	1F	15	60.64	59.27	66.5	45	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	16 H 200	1F	16	64.67	63.31	70.0	45	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	17 H 200	1F	17	68.72	67.35	75.0	45	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	18 H 200	1F	18	72.77	71.39	79.0	55	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	19 H 200	1F	19	76.81	75.44	82.5	60	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	20 H200	1F	20	80.85	79.48	87.0	62	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	21 H 200	1F	21	84.89	83.52	91.0	65	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	22 H 200	1F	22	88.93	87.56	94.0	68	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	23 H 200	1F	23	92.98	91.61	97.0	72	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	24 H 200	1F	24	97.03	95.65	102.0	72	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	25 H 200	1F	25	101.06	99.69	106.0	72	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	26 H 200	1F	26	105.11	103.73	112.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	27 H 200	1F	27	109.15	107.78	115.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	28 H 200	1F	28	113.18	111.82	120.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	29 H 200	1F	29	117.23	115.86	120.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	30 H 200	1F	30	121.29	119.90	128.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	32 H 200	1F	32	129.30	127.99	135.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	33 H 200	1F	33	133.40	132.03	142.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	34 H200	1F	34	137.45	136.07	142.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	35 H 200	1F	35	141.49	140.12	150.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	36 H 200	1F	36	145.54	144.16	150.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	38 H 200	1F	38	153.62	152.24	158.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	40 H 200	1F	40	161.70	160.33	168.0	80	58.7	70	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	42 H 200	1F	42	169.79	168.41	180.0	80	58.7	70	-
CAST IRON 鑄鐵	WITH FLANGE 有擋圈	44 H 200	5F	44	177.80	176.50	184.0	80	58.7	70	19
CAST IRON 鑄鐵	WITH FLANGE 有擋圈	45 H 200	5F	45	181.91	180.54	192.0	80	58.7	70	19
CAST IRON 鑄鐵	WITH FLANGE 有擋圈	48 H 200	5F	48	194.03	192.67	200.0	90	58.7	75	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	50 H 200	4	50	202.13	200.75	-	90	58.7	75	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	52 H 200	4	52	210.21	208.84	-	90	58.7	75	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	58 H 200	4	58	234.47	233.09	-	90	58.7	75	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	60 H 200	4	60	242.55	241.18	-	120	58.7	75	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	70 H 200	4	70	282.98	281.61	-	120	58.7	75	28
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	72 H 200	4	72	291.06	289.68	-	120	58.7	75	28
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	84 H 200	4	84	339.57	338.20	-	120	58.7	75	28
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	96 H 200	4	96	388.09	386.71	-	120	58.7	75	28
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	120 H 200	4	120	485.12	483.73	-	120	58.7	75	28

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

同步帶輪系列 TIMING PULLEY

SILVERTECH 銀科工業

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

H 300 PITCH 節距 1/2"(12.7mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	14 H 300	1F	14	56.59	55.22	64.0	42	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	15 H 300	1F	15	60.64	59.27	66.5	45	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	16 H 300	1F	16	64.67	63.31	70.0	45	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	17 H 300	1F	17	68.72	67.35	75.0	45	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	18 H 300	1F	18	72.77	71.39	79.0	55	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	19 H 300	1F	19	76.81	75.44	82.5	60	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	20 H 300	1F	20	80.85	79.48	87.0	62	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	21 H 300	1F	21	84.89	83.52	91.0	65	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	22 H 300	1F	22	88.93	87.56	94.0	68	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	23 H 300	1F	23	92.98	91.61	97.0	72	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	24 H 300	1F	24	97.03	95.65	102.0	72	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	25 H 300	1F	25	101.06	99.69	106.0	72	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	26 H 300	1F	26	105.11	103.73	112.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	27 H 300	1F	27	109.15	107.78	115.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	28 H 300	1F	28	113.18	111.82	120.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	30 H 300	1F	30	121.29	119.90	128.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	32 H 300	1F	32	129.30	127.99	135.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	33 H 300	1F	33	133.40	132.03	142.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	34 H 300	1F	34	137.45	136.07	142.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	35 H 300	1F	35	141.49	140.12	150.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	36 H 300	1F	36	145.54	144.16	150.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	38 H 300	1F	38	153.62	152.24	158.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	40 H 300	1F	40	161.70	160.33	168.0	80	85.7	100	-
C45 STEEL 鋼	WITH FLANGE 有擋圈	42 H 300	1F	42	169.79	168.41	180.0	80	85.7	100	-
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	44 H 300	4	44	177.88	176.50	-	80	85.7	100	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	48 H 300	4	48	194.03	192.67	-	90	85.7	100	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	50 H 300	4	50	202.13	200.75	-	90	85.7	100	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	58 H 300	4	58	234.47	233.09	-	90	85.7	100	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	60 H 300	4	60	242.55	241.18	-	120	85.7	100	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	72 H 300	4	72	291.06	289.68	-	120	85.7	100	28
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	84 H 300	4	84	339.57	338.20	-	120	85.7	100	28
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	96 H 300	4	96	388.09	386.71	-	120	85.7	100	28
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	120 H 300	4	120	485.12	483.73	-	120	85.7	100	28

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

同步帶輪系列 TIMING PULLEY

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

XH 200 PITCH 節距 7/8"(22.22mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	18 XH200	1F	18	127.34	124.55	140.0	100	65	80	24
		19 XH200	1F	19	134.41	131.62	146.0	100	65	80	24
		20 XH200	1F	20	141.49	138.69	155.0	100	65	80	24
		21 XH200	1F	21	148.56	145.77	160.0	110	65	80	24
		22 XH200	1F	22	155.64	152.84	170.0	110	65	80	24
		24 XH200	1F	24	169.79	166.99	184.0	120	65	80	24
		25 XH200	1F	25	176.86	174.07	188.0	120	65	80	24
		26 XH200	1F	26	183.93	181.14	198.0	120	65	80	24
		27 XH200	1F	27	191.01	188.22	205.0	120	65	80	24
		28 XH200	1F	28	198.09	195.29	212.0	120	65	80	24
		30 XH200	1F	30	212.23	209.44	227.0	120	65	80	24
		32 XH200	1F	32	226.38	223.59	240.0	120	65	80	24
		34 XH200	1F	34	240.53	237.74	256.0	120	65	80	24
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	38 XH200	4	38	268.83	266.03	-	150	65	80	28
		40 XH200	4	40	282.98	280.18	-	150	65	100	28
		48 XH200	4	48	339.57	336.78	-	150	65	100	28
		60 XH200	4	60	424.47	421.67	-	150	65	100	28
		72 XH200	4	72	509.36	506.56	-	160	65	100	28
		84 XH200	4	84	594.25	591.46	-	160	65	100	28
		96 XH200	4	96	679.15	676.35	-	160	65	100	28
		120 XH200	4	120	848.93	846.14	-	160	65	100	28

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理**.

SILVERTECH 銀科工業

高品質同步帶輪
HIGH QUALITY TIMING BELT PULLEYS

XH 300 PITCH 節距 7/8"(22.22mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	18 XH 300	1F	18	127.34	124.55	140.0	100	90.5	110	28
		19 XH 300	1F	19	134.41	131.62	146.0	100	90.5	110	28
		20 XH 300	1F	20	141.49	138.69	155.0	100	90.5	100	28
		21 XH 300	1F	21	148.56	145.77	160.0	110	90.5	110	28
		22 XH 300	1F	22	155.64	152.84	170.0	110	90.5	110	28
		24 XH 300	1F	24	169.79	166.99	184.0	120	90.5	110	28
		25 XH 300	1F	25	176.86	174.07	188.0	120	90.5	110	28
		26 XH 300	1F	26	183.93	181.14	198.0	120	90.5	110	28
		27 XH 300	1F	27	191.01	188.22	205.0	120	90.5	110	28
		28 XH 300	1F	28	198.09	195.29	212.0	150	90.5	110	28
		30 XH 300	1F	30	212.23	209.44	227.0	150	90.5	110	28
		32 XH 300	1F	32	226.38	223.59	240.0	150	90.5	110	28
		34 XH 300	1F	34	240.53	237.74	256.0	150	90.5	110	28
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	38 XH 300	4	38	268.83	266.03	-	150	90.5	120	32
		40 XH 300	4	40	282.98	280.18	-	150	90.5	120	32
		48 XH 300	4	48	339.57	336.78	-	175	90.5	120	32
		60 XH 300	4	60	424.47	421.67	-	175	90.5	120	32
		72 XH 300	4	72	509.36	506.56	-	175	90.5	120	32
		84 XH 300	4	84	594.25	591.46	-	175	90.5	120	32
		96 XH 300	4	96	679.15	676.35	-	175	90.5	120	32
		120 XH 300	4	120	848.93	846.14	-	175	90.5	120	32

XH 400 PITCH 節距 7/8"(22.22mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	18 XH 400	1F	18	127.34	124.55	140.0	100	118.0	132	32
		19 XH 400	1F	19	134.41	131.62	146.0	100	118.0	132	32
		20 XH 400	1F	20	141.49	138.69	155.0	100	118.0	132	32
		21 XH 400	1F	21	148.56	145.77	160.0	110	118.0	132	32
		22 XH 400	1F	22	155.64	152.84	170.0	110	118.0	132	32
		24 XH 400	1F	24	169.79	166.99	184.0	120	118.0	132	32
		25 XH 400	1F	25	176.86	174.07	188.0	120	118.0	132	32
		26 XH 400	1F	26	183.93	181.14	198.0	120	118.0	132	32
		27 XH 400	1F	27	191.01	188.22	205.0	120	118.0	132	32
		28 XH 400	1F	28	198.09	195.29	212.0	150	118.0	132	32
		30 XH 400	1F	30	212.23	209.44	227.0	150	118.0	132	32
		32 XH 400	1F	32	226.38	223.59	240.0	150	118.0	132	32
		34 XH 400	1F	34	240.53	237.74	256.0	150	118.0	132	32
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	38 XH 400	4	38	268.83	266.03	-	150	118.0	132	32
		40 XH 400	4	40	282.98	280.18	-	150	118.0	132	32
		48 XH 400	4	48	339.57	336.78	-	175	118.0	132	32
		60 XH 400	4	60	424.47	421.67	-	175	118.0	132	32
		72 XH 400	4	72	509.36	506.56	-	175	118.0	132	32
		84 XH 400	4	84	594.25	591.46	-	175	118.0	132	32
		96 XH 400	4	96	679.15	676.35	-	175	118.0	132	32
		120 XH 400	4	120	848.93	846.14	-	175	118.0	132	32

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理**.

錐孔高品質同步帶輪
HIGH QUALITY **TAPER BORED** TIMING BELT PULLEYS


TYPE 型式 1F

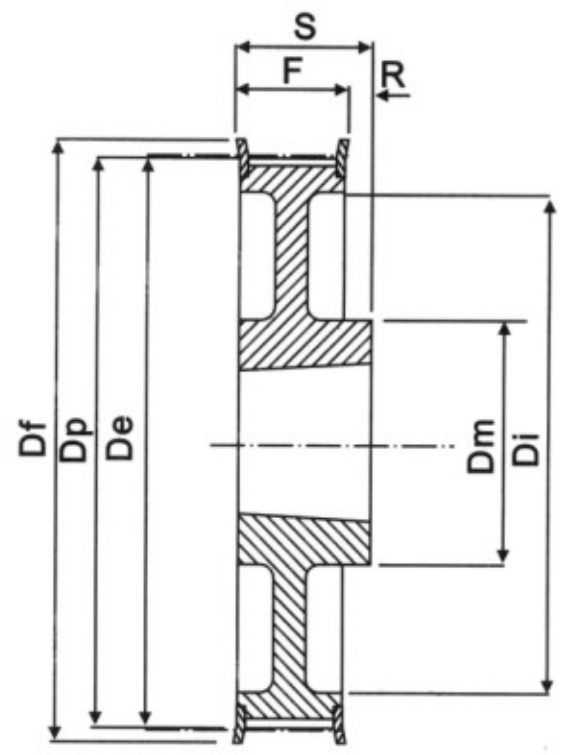
TYPE 型式 2F

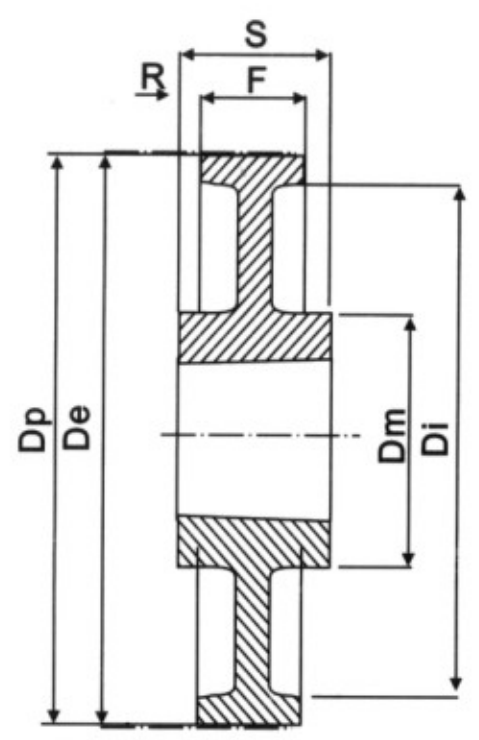
TYPE 型式 3

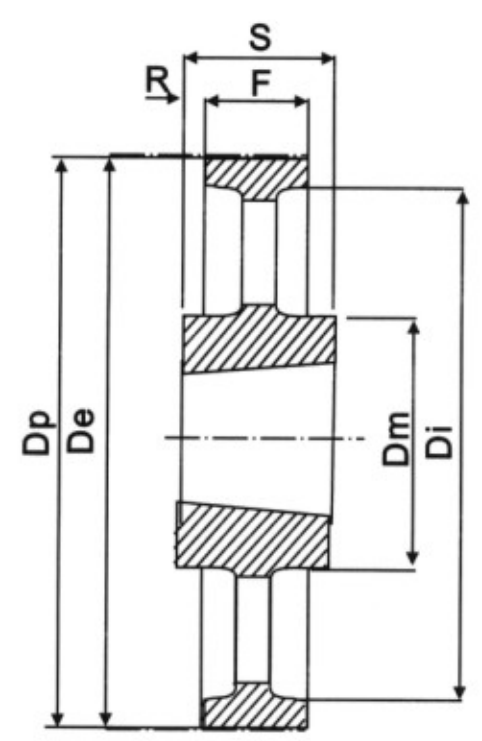
TYPE 型式 4


TYPE 型式 5F

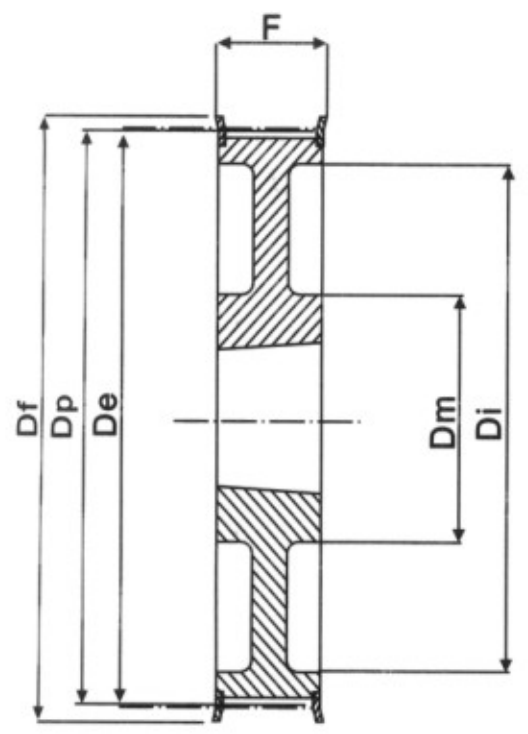
TYPE 型式 6F

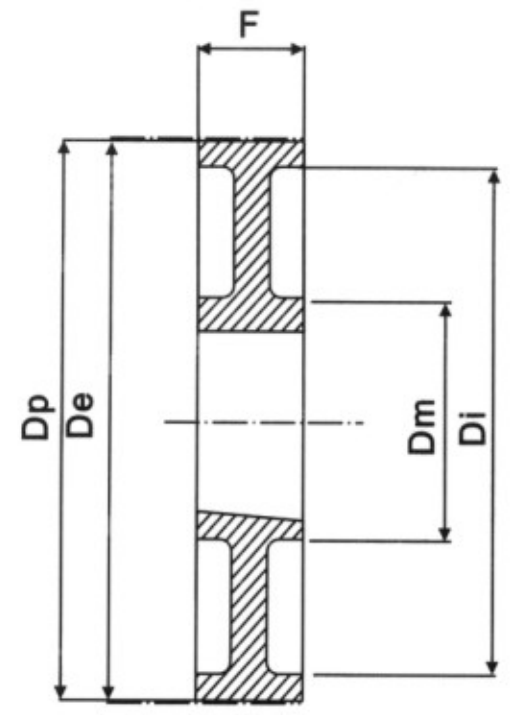
TYPE 型式 7

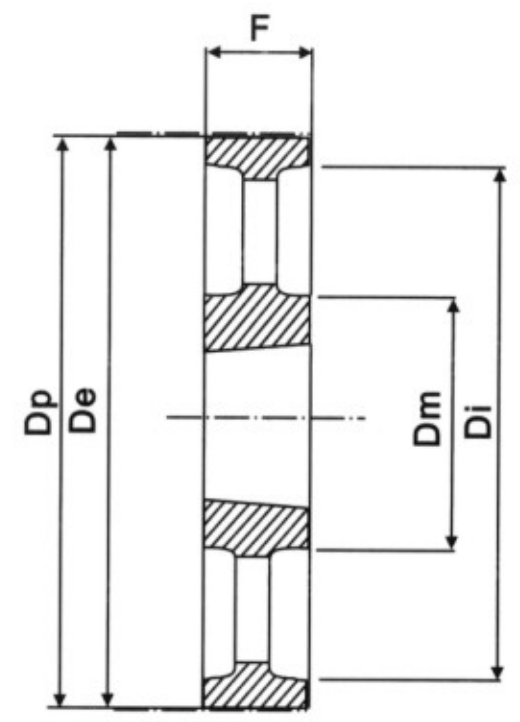
TYPE 型式 8


TYPE 型式 9F

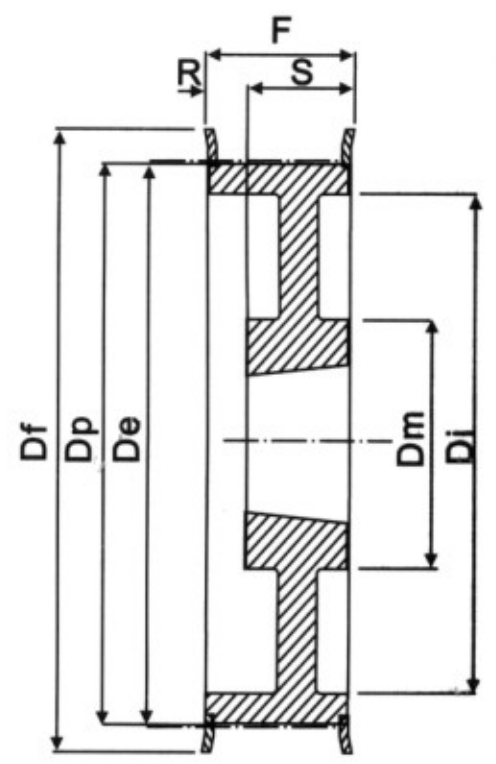
TYPE 型式 10F

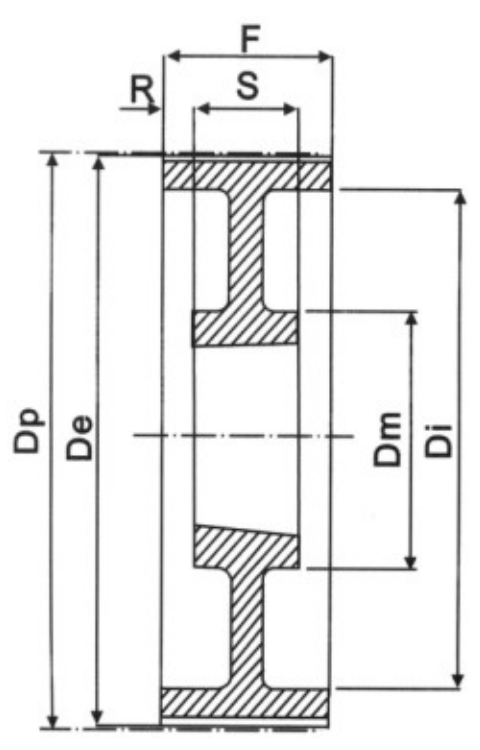
TYPE 型式 11

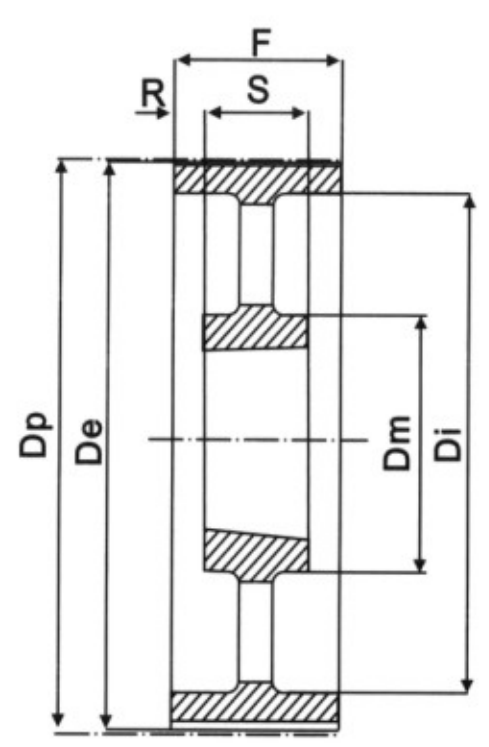
TYPE 型式 12


TYPE 型式 13F

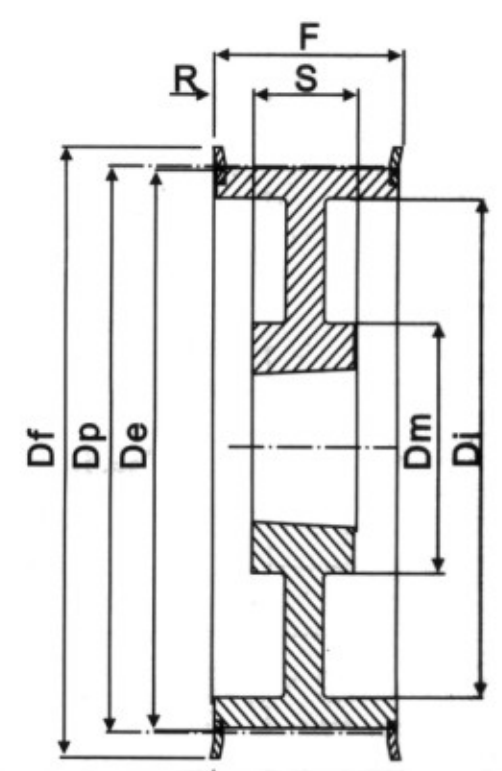
TYPE 型式 14F

同步帶輪系列 TIMING PULLEY

SILVERTECH 銀科工業

錐孔高品質同步帶輪
HIGH QUALITY **TAPER BORED** TIMING BELT PULLEYS

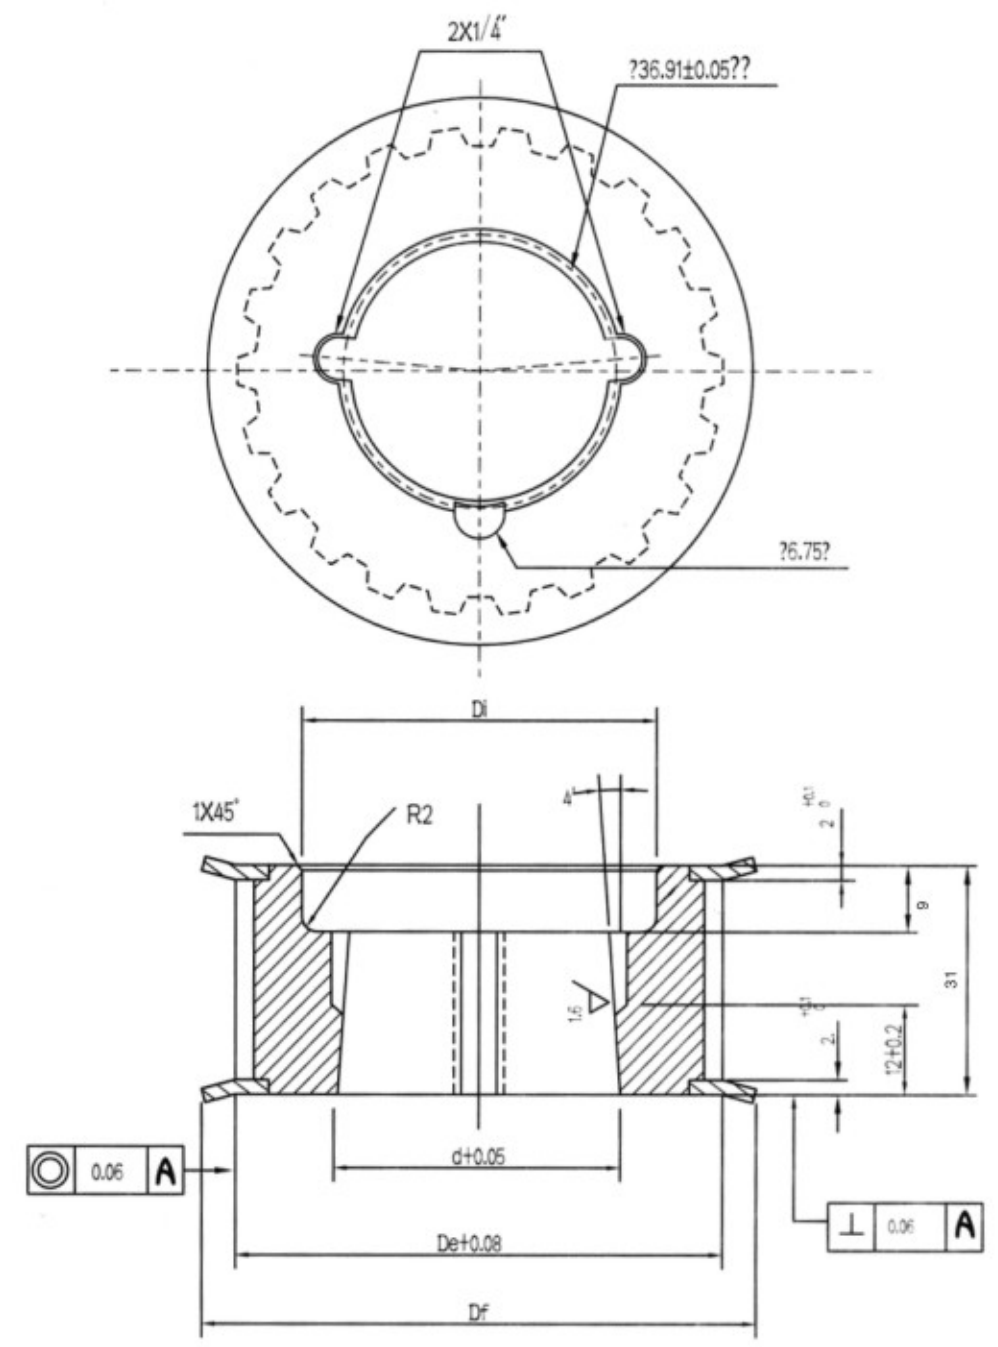



L 050 PITCH 節距 3/8"(9.52mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 18 L 050	1F	1108	54.57	53.81	60	45	-	19.0	22.0	3
		TL 19 L 050	1F	1108	57.61	56.84	64	45	-	19.0	22.0	3
		TL 20 L 050	1F	1108	60.64	59.88	66.5	48	-	19.0	22.0	3
		TL 21 L 050	1F	1108	63.67	62.91	70	48	-	19.0	22.0	3
		TL 22 L 050	1F	1108	66.70	65.94	75	51	-	19.0	22.0	3
		TL 23 L 050	1F	1108	69.73	68.97	79	54	-	19.0	22.0	3
		TL 24 L 050	1F	1108	72.77	72.00	79	54	-	19.0	22.0	3
		TL 25 L 050	1F	1108	75.80	75.04	82.5	56	-	19.0	22.0	3
		TL 26 L 050	1F	1108	78.83	78.07	86	60	-	19.0	22.0	3
		TL 27 L 050	1F	1108	81.86	81.10	86	62	-	19.0	22.0	3
		TL 28 L 050	1F	1108	84.89	84.13	91	65	-	19.0	22.0	3
		TL 30 L 050	1F	1108	90.96	90.20	97	70	-	19.0	22.0	3
		TL 32 L 050	1F	1108	97.02	96.26	102	74	-	19.0	22.0	3
		TL 36 L 050	1F	1108	109.15	108.39	115	85	-	19.0	22.0	3
		TL 40 L 050	1F	1610	121.28	120.51	128	97	-	19.0	25.0	6
		TL 44 L 050	2F	1610	133.40	132.64	142	88	110	19.0	25.0	6
		TL 48 L 050	2F	1610	145.53	144.77	150	88	120	19.0	25.0	6
	WITHOUT FLANGE 無擋圈	TL 60 L 050	3	1610	181.91	181.15	-	92	166	19.0	25.0	3
CAST IRON 鑄鐵		TL 72 L 050	4	1610	218.30	217.53	-	92	202	19.0	25.0	3
		TL 84 L 050	4	1610	254.68	253.90	-	92	236	19.0	25.0	3
		TL 96 L 050	4	2012	291.06	290.30	-	106	270	19.0	32.0	6.5
		TL 120 L 050	4	2012	363.83	363.07	-	106	343	19.0	32.0	6.5

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

同步帶輪系列 TIMING PULLEY

錐孔高品質同步帶輪
HIGH QUALITY **TAPER BORED** TIMING BELT PULLEYS

L 075 PITCH 節距 3/8"(9.52mm)

材料 FEATURES	結構 FEATURES	貨號 MODEL NO.	型式 TYPE	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 18 L 075	5F	1108	54.57	53.81	60	-	-	25.0	25.0	-
		TL 19 L 075	5F	1108	57.61	56.84	64	-	-	25.0	25.0	-
		TL 20 L 075	5F	1108	60.64	59.88	66.5	-	-	25.0	25.0	-
		TL 21 L 075	5F	1108	63.67	62.91	70	-	-	25.0	25.0	-
		TL 22 L 075	5F	1108	66.70	65.94	75	-	-	25.0	25.0	-
		TL 23 L 075	5F	1108	69.73	68.97	79	-	-	25.0	25.0	-
		TL 24 L 075	5F	1108	72.77	72.00	79	-	-	25.0	25.0	-
		TL 25 L 075	5F	1108	75.80	75.04	82.5	-	-	25.0	25.0	-
		TL 26 L 075	5F	1108	78.83	78.07	86	-	-	25.0	25.0	-
		TL 27 L 075	5F	1108	81.86	81.10	86	-	-	25.0	25.0	-
		TL 28 L 075	5F	1108	84.89	84.13	91	-	-	25.0	25.0	-
		TL 30 L 075	5F	1108	90.96	90.20	97	-	-	25.0	25.0	-
		TL 32 L 075	5F	1108	97.02	96.26	102	-	-	25.0	25.0	-
		TL 36 L 075	5F	1610	109.15	108.39	115	-	-	25.0	25.0	-
		TL 40 L 075	2F	1610	121.28	120.51	128	-	-	25.0	25.0	-
		TL 44 L 075	6F	1610	133.40	132.64	142	90	110	25.0	25.0	-
		TL 48 L 075	6F	1610	145.53	144.77	150	92	120	25.0	25.0	-
	WITHOUT FLANGE 無擋圈	TL 60 L 075	7	1610	181.91	181.15	-	92	166	25.0	25.02	-
CAST IRON 鑄鐵		TL 72 L 075	8	1610	218.30	217.53	-	92	202	25.0	25.0	-
		TL 84 L 075	4	2012	254.68	253.90	-	106	236	25.0	32.0	3.5
		TL 96 L 075	4	2012	291.06	290.30	-	106	270	25.0	32.0	3.5
		TL 120 L 075	4	2012	363.83	363.07	-	106	343	25.0	32.0	3.5

L 100 PITCH 節距 3/8"(9.52mm)

材料 FEATURES	結構 FEATURES	貨號 MODEL NO.	型式 TYPE	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 18 L 100	9F	1108	54.57	53.81	60	-	38	31.0	22.0	9.0
		TL 19 L 100	9F	1108	57.61	56.84	64	-	38	31.0	22.0	9.0
		TL 20 L 100	9F	1108	60.64	59.88	66.5	-	45	31.0	22.0	9.0
		TL 21 L 100	9F	1108	63.67	62.91	70	-	45	31.0	22.0	9.0
		TL 22 L 100	9F	1108	66.70	65.94	75	-	48	31.0	22.0	9.0
		TL 23 L 100	9F	1108	69.73	68.97	79	-	52	32.0	22.0	10.0
		TL 24 L 100	9F	1108	72.77	72.00	79	-	52	32.0	22.0	10.0
		TL 25 L 100	9F	1108	75.80	75.04	82.5	-	54	32.0	22.0	10.0
		TL 26 L 100	9F	1108	78.83	78.07	86	-	60	32.0	22.0	10.0
		TL 27 L 100	9F	1108	81.86	81.10	86	-	60	32.0	22.0	10.0
		TL 28 L 100	9F	1108	84.89	84.13	91	-	65	32.0	22.0	10.0
		TL 30 L 100	9F	1210	90.96	90.20	97	-	71	32.0	25.0	7.0
		TL 32 L 100	9F	1210	97.02	96.26	102	-	75	32.0	25.0	7.0
		TL 36 L 100	9F	1610	109.15	108.39	115	-	86	32.0	25.0	7.0
		TL 40 L 100	9F	1610	121.28	120.51	128	-	96	32.0	25.0	7.0
		TL 44 L 100	10F	1610	133.40	132.64	142	90	110	32.0	25.0	7.0
		TL 48 L 100	10F	1610	145.53	144.77	150	92	120	32.0	25.0	7.0
	WITHOUT FLANGE 無擋圈	TL 60 L 100	11	1610	181.91	181.15	-	92	166	32.0	25.0	3.5
CAST IRON 鑄鐵		TL 72 L 100	8	2012	218.30	217.53	-	92	202	32.0	32.0	-
		TL 84 L 100	8	2012	254.68	253.90	-	106	236	32.0	32.0	-
		TL 96 L 100	8	2012	291.06	290.30	-	106	270	32.0	32.0	-
		TL 120 L 100	8	2012	363.83	363.07	-	106	343	32.0	32.0	-

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

同步帶輪系列 TIMING PULLEY

SILVERTECH 銀科工業

錐孔高品質同步帶輪
HIGH QUALITY **TAPER BORED** TIMING BELT PULLEYS

H 100 PITCH 節距 1/2"(12.7mm)

材料 FEATURES	結構 FEATURES	貨號 MODEL NO.	型式 TYPE	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 16H 100	9F	1108	64.68	63.31	70	-	45	31.0	22.0	9.0
		TL 18 H 100	9F	1210	72.77	71.39	79	-	52	31.0	25.0	6.0
		TL 19 H 100	9F	1210	76.81	74.44	82.5	-	56	31.0	25.0	6.0
		TL 20 H 100	9F	1210	80.55	79.48	87	-	60	31.0	25.0	6.0
		TL 21 H 100	9F	1210	84.89	83.52	91	-	64	32.0	25.0	7.0
		TL 22 H 100	9F	1210	88.94	87.56	94	-	67	32.0	25.0	7.0
		TL 23 H 100	9F	1610	92.98	91.61	97	-	70	32.0	25.0	7.0
		TL 24 H 100	9F	1610	97.02	95.65	102	-	73.5	32.0	25.0	7.0
		TL 25 H 100	9F	1610	101.06	99.69	106	-	77	32.0	25.0	7.0
		TL 26 H 100	9F	1610	105.11	103.73	112	-	82	32.0	25.0	7.0
		TL 27 H 100	9F	1610	109.15	107.78	115	-	85	32.0	25.0	7.0
		TL 28 H 100	9F	1610	113.19	111.82	120	-	90.5	32.0	25.0	7.0
		TL 30 H 100	9F	1610	121.28	119.90	128	-	98	32.0	25.0	7.0
		TL 32 H 100	10F	1610	129.36	127.99	135	80	106	32.0	25.0	7.0
		TL 36 H 100	10F	1610	145.53	144.16	150	92	121	32.0	25.0	7.0
		TL 40 H 100	10F	1610	161.70	160.33	168	92	138	32.0	25.0	7.0
		TL 44 H 100	6F	2012	177.87	176.50	184	106	152	32.0	32.0	0
		TL 48 H 100	6F	2012	194.04	192.67	200	106	169	32.0	32.0	0
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	TL 60 H 100	12	2012	242.55	241.18	-	106	223	34.0	32.0	1.0
		TL 72 H 100	12	2012	291.06	289.69	-	106	270	34.0	32.0	1.0
		TL 84 H 100	12	2012	339.57	338.20	-	106	318	34.0	32.0	1.0
		TL 96 H 100	4	2517	388.08	386.71	-	119	366	34.0	45.0	5.5
		TL 120 H 100	4	2517	485.10	483.73	-	119	462	34.0	45.0	5.5

H 150 PITCH 節距 1/2"(12.7mm)

材料 FEATURES	結構 FEATURES	貨號 MODEL NO.	型式 TYPE	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 18 H 150	9F	1210	72.77	71.39	79	-	52	45.0	25.0	20.0
		TL 19 H 150	9F	1210	76.81	74.44	82.5	-	56	45.0	25.0	20.0
		TL 20 H 150	9F	1210	80.55	79.48	87	-	60	45.0	25.0	20.0
		TL 21 H 150	9F	1210	84.89	83.52	91	-	64	45.0	25.0	20.0
		TL 22 H 150	9F	1210	88.94	87.56	94	-	67	45.0	25.0	20.0
		TL 23 H 150	9F	1610	92.98	91.61	97	-	70	45.0	25.0	20.0
		TL 24 H 150	9F	1610	97.02	95.65	102	-	73.5	45.0	25.0	20.0
		TL 25 H 150	9F	1610	101.06	99.69	106	-	77	45.0	25.0	20.0
		TL 26 H 150	9F	1610	105.11	103.73	112	-	82	45.0	25.0	20.0
		TL 27 H 150	9F	1610	109.15	107.78	115	-	85	45.0	25.0	20.0
		TL 28 H 150	9F	1610	113.19	111.82	120	-	90.5	45.0	25.0	20.0
		TL 30 H 150	9F	1610	121.28	119.90	128	-	98	45.0	25.0	20.0
		TL 32 H 150	10F	1610	129.36	127.99	135	80	106	45.0	25.0	20.0
		TL 36 H 150	10F	1610	145.53	144.16	150	92	121	45.0	25.0	20.0
		TL 40 H 150	10F	1610	161.70	160.33	168	92	138	45.0	25.0	20.0
		TL 44 H 150	10F	2012	177.87	176.50	184	106	152	45.0	32.0	13.0
		TL 48 H 150	10F	2012	194.04	192.67	200	106	169	45.0	32.0	13.0
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	TL 60 H 150	12	2012	242.55	241.18	-	106	223	46.0	32.0	7.0
		TL 72 H 150	12	2012	291.06	289.69	-	106	270	46.0	32.0	7.0
		TL 84 H 150	12	2012	339.57	338.20	-	106	320	46.0	32.0	7.0
		TL 96 H 150	12	2517	388.08	386.71	-	119	366	46.0	45.0	0.5
		TL 120 H 150	12	2517	485.10	483.73	-	119	462	46.0	45.0	0.5

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

同步帶輪系列 TIMING PULLEY

錐孔高品質同步帶輪

HIGH QUALITY **TAPER BORED** TIMING BELT PULLEYS

H 200 PITCH 節距 1/2"(12.7mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 18 H 200	9F	1210	72.77	71.39	79	-	52	58.0	25.0	33.0
		TL 19 H 200	9F	1210	76.81	74.44	82.5	-	56	58.0	25.0	33.0
		TL 20 H 200	9F	1610	80.85	79.48	87	-	62	58.0	25.0	33.0
		TL 21 H 200	9F	1610	84.89	83.52	91	-	64	58.0	25.0	33.0
		TL 22 H 200	9F	1610	88.94	87.56	94	-	67	58.0	25.0	33.0
		TL 23 H 200	9F	1610	92.98	91.61	97	-	70	58.0	25.0	33.0
		TL 24 H 200	9F	1610	97.02	95.65	102	-	73.5	58.0	25.0	33.0
		TL 25 H 200	9F	1610	101.06	99.69	106	-	77	58.0	25.0	33.0
		TL 26 H 200	9F	1610	105.11	103.73	112	-	82	58.0	25.0	33.0
		TL 27 H 200	9F	1610	109.15	107.78	115	-	85	58.0	25.0	33.0
		TL 28 H 200	9F	1610	113.19	111.82	120	-	90.5	58.0	25.0	33.0
		TL 30 H 200	9F	1610	121.28	119.90	128	-	98	58.0	25.0	33.0
		TL 32 H 200	9F	2012	129.36	127.99	135	-	106	58.0	32.0	26.0
		TL 36 H 200	10F	2012	145.53	144.16	150	102	121	58.0	32.0	26.0
		TL 40 H 200	10F	2012	161.70	160.33	168	106	138	58.0	32.0	26.0
		TL 44 H 200	10F	2012	177.87	176.50	184	106	152	58.0	32.0	26.0
		TL 48 H 200	10F	2517	194.04	192.67	200	119	168	58.0	45.0	13.0
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	TL 60 H 200	12	2517	242.55	241.18	-	119	223	60.0	45.0	7.5
		TL 72 H 200	12	2517	291.06	289.69	-	119	270	60.0	45.0	7.5
		TL 84 H 200	12	2517	339.57	338.20	-	119	320	60.0	45.0	7.5
		TL 96 H 200	12	2517	388.08	386.71	-	119	366	60.0	45.0	7.5
		TL 120 H 200	12	2517	485.10	483.73	-	119	462	60.0	45.0	7.5

H 300 PITCH 節距 1/2"(12.7mm)

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 20 H 300	13F	1615	80.55	79.48	87	-	64.5	84.0	38.0	23.0
		TL 21 H 300	13F	1615	84.89	83.52	91	-	65	84.0	38.0	23.0
		TL 22 H 300	13F	1615	88.94	87.56	94	-	67	84.0	38.0	23.0
		TL 23 H 300	13F	1615	92.98	91.61	97	-	70	84.0	38.0	23.0
		TL 24 H 300	13F	1615	97.02	95.65	102	-	73.5	84.0	38.0	23.0
		TL 25 H 300	13F	1615	101.06	99.69	106	-	77	84.0	38.0	23.0
		TL 26 H 300	13F	1615	105.11	103.73	112	-	82	84.0	38.0	23.0
		TL 27 H 300	13F	2012	109.15	107.78	115	-	85	84.0	32.0	26.0
		TL 28 H 300	13F	2012	113.19	111.82	120	-	90.5	84.0	32.0	26.0
		TL 30 H 300	13F	2012	121.28	119.90	128	-	98	84.0	32.0	26.0
		TL 32 H 300	13F	2517	129.36	127.99	135	-	106	84.0	45.0	19.5
		TL 36 H 300	13F	2517	145.53	144.16	150	-	121	84.0	45.0	19.5
		TL 40 H 300	13F	2517	161.70	160.33	168	-	138	84.0	45.0	19.5
		TL 44 H 300	14F	2517	177.87	176.50	184	119	150	86.0	45.0	20.5
		TL 48 H 300	14F	2517	194.04	192.67	200	119	165	86.0	45.0	20.5
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	TL 60 H 300	12	2517	242.55	241.18	-	119	223	86.0	45.0	20.5
		TL 72 H 300	12	2517	291.06	289.69	-	119	270	86.0	45.0	20.5
		TL 84 H 300	12	2517	339.57	338.20	-	119	320	86.0	45.0	20.5
		TL 96 H 300	12	3030	388.08	386.71	-	150	362	86.0	76.0	5.0
		TL 120 H 300	12	3030	485.10	483.73	-	150	460	86.0	76.0	5.0

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

SILVERTECH 銀科工業

高品質同步帶棒

HIGH QUALITY TIMING BARS

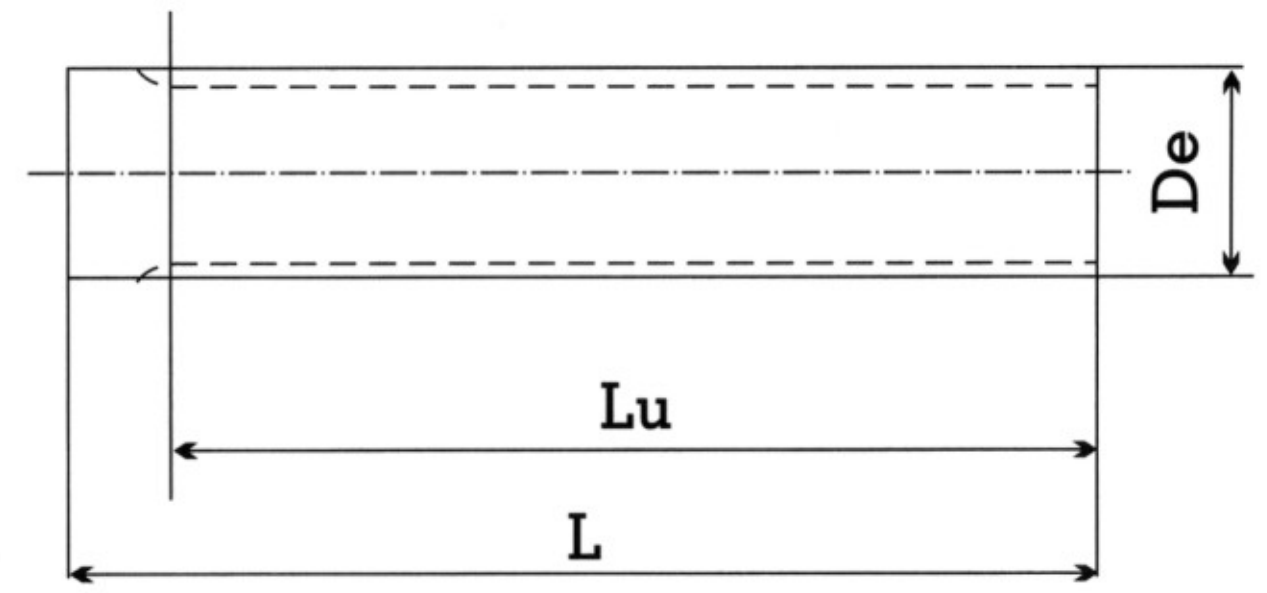

MXL-0.080"(2.032mm)

材料	貨號 MODEL NO.	齒數 TEETH NO.	外徑 De	Lu	L
ALUMINIUM 鋁	MXL 12	12	7.26	50	75
	MXL 14	14	8.56	50	75
	MXL 15	15	9.19	50	75
	MXL 16	16	9.83	50	75
	MXL 18	18	11.12	50	75
	MXL 20	20	12.42	90	120
	MXL 22	22	13.72	125	140
	MXL 24	24	15.01	125	140
	MXL 25	25	15.67	125	140
	MXL 26	26	16.31	125	140
	MXL 28	28	17.60	125	140
	MXL 30	30	18.90	125	140
	MXL 32	32	20.19	125	140
	MXL 34	34	21.49	125	140
	MXL 36	36	22.78	132	140
	MXL 38	38	24.08	132	140
	MXL 40	40	25.37	132	140
	MXL 42	42	26.67	140	140
	MXL 44	44	27.94	140	140
	MXL 45	45	28.60	140	140
	MXL 48	48	30.53	140	140
	MXL50	50	31.83	140	140
	MXL60	60	38.30	160	160
	MXL70	70	44.78	160	160
	MXL72	72	46.05	160	160

XL-1/5"(5.08mm)

材料	貨號 MODEL NO.	齒數 TEETH NO.	外徑 De	Lu	L
ALUMINIUM OR STEEL 鋁或鋼	XL 10	10	15.66	125	140
	XL 11	11	17.28	125	140
	XL 12	12	18.90	125	140
	XL 13	13	20.51	125	140
	XL 14	14	22.13	132	140
	XL 15	15	23.75	132	140
	XL 16	16	25.36	140	140
	XL 17	17	26.98	140	140
	XL 18	18	28.60	140	140
	XL 19	19	30.22	140	140
	XL 20	20	31.83	140	140
	XL 21	21	33.45	160	160
	XL 22	22	35.07	160	160
	XL 23	23	36.60	160	160
	XL 24	24	38.30	160	160
	XL 25	25	39.93	160	160
	XL 26	26	41.53	160	160
	XL 27	27	43.15	160	160
	XL 28	28	44.77	160	160
	XL 29	29	46.93	160	160
	XL 30	30	48.00	160	160
	XL 32	32	51.24	160	160
	XL 33	33	52.76	160	160
	XL 34	34	54.47	160	160
	XL 35	35	56.09	160	160
	XL 36	36	57.70	160	160
	XL 38	38	60.94	160	160
	XL 39	39	62.56	160	160
	XL 40	40	64.17	160	160
	XL 41	41	65.79	160	160
	XL 42	42	67.41	160	160
	XL 43	43	69.02	160	160
	XL 44	44	70.64	160	160
	XL 48	48	77.11	160	160
	XL 56	56	90.04	160	160
	XL 60	60	96.51	160	160
	XL 72	72	115.92	160	160

L-3/8"(9.525mm)

材料	貨號 MODEL NO.	齒數 TEETH NO.	外徑 De	Lu	L
ALUMINIUM OR STEEL 鋁或鋼	L 10	10	29.56	140	140
	L 11	11	32.59	140	140
	L 12	12	35.62	160	160
	L 13	13	38.65	160	160
	L 14	14	41.68	160	160
	L 15	15	44.72	160	160
	L 16	16	47.75	160	160
	L 17	17	50.78	160	160
	L 18	18	53.81	160	160
	L 19	16	56.84	160	160
	L 20	20	59.88	160	160
	L 21	21	62.91	160	160
	L 22	22	65.94	160	160
	L 23	23	68.97	160	160
	L 24	24	72.00	160	160
	L 27	27	81.10	160	160
	L 30	30	90.20	160	160

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS

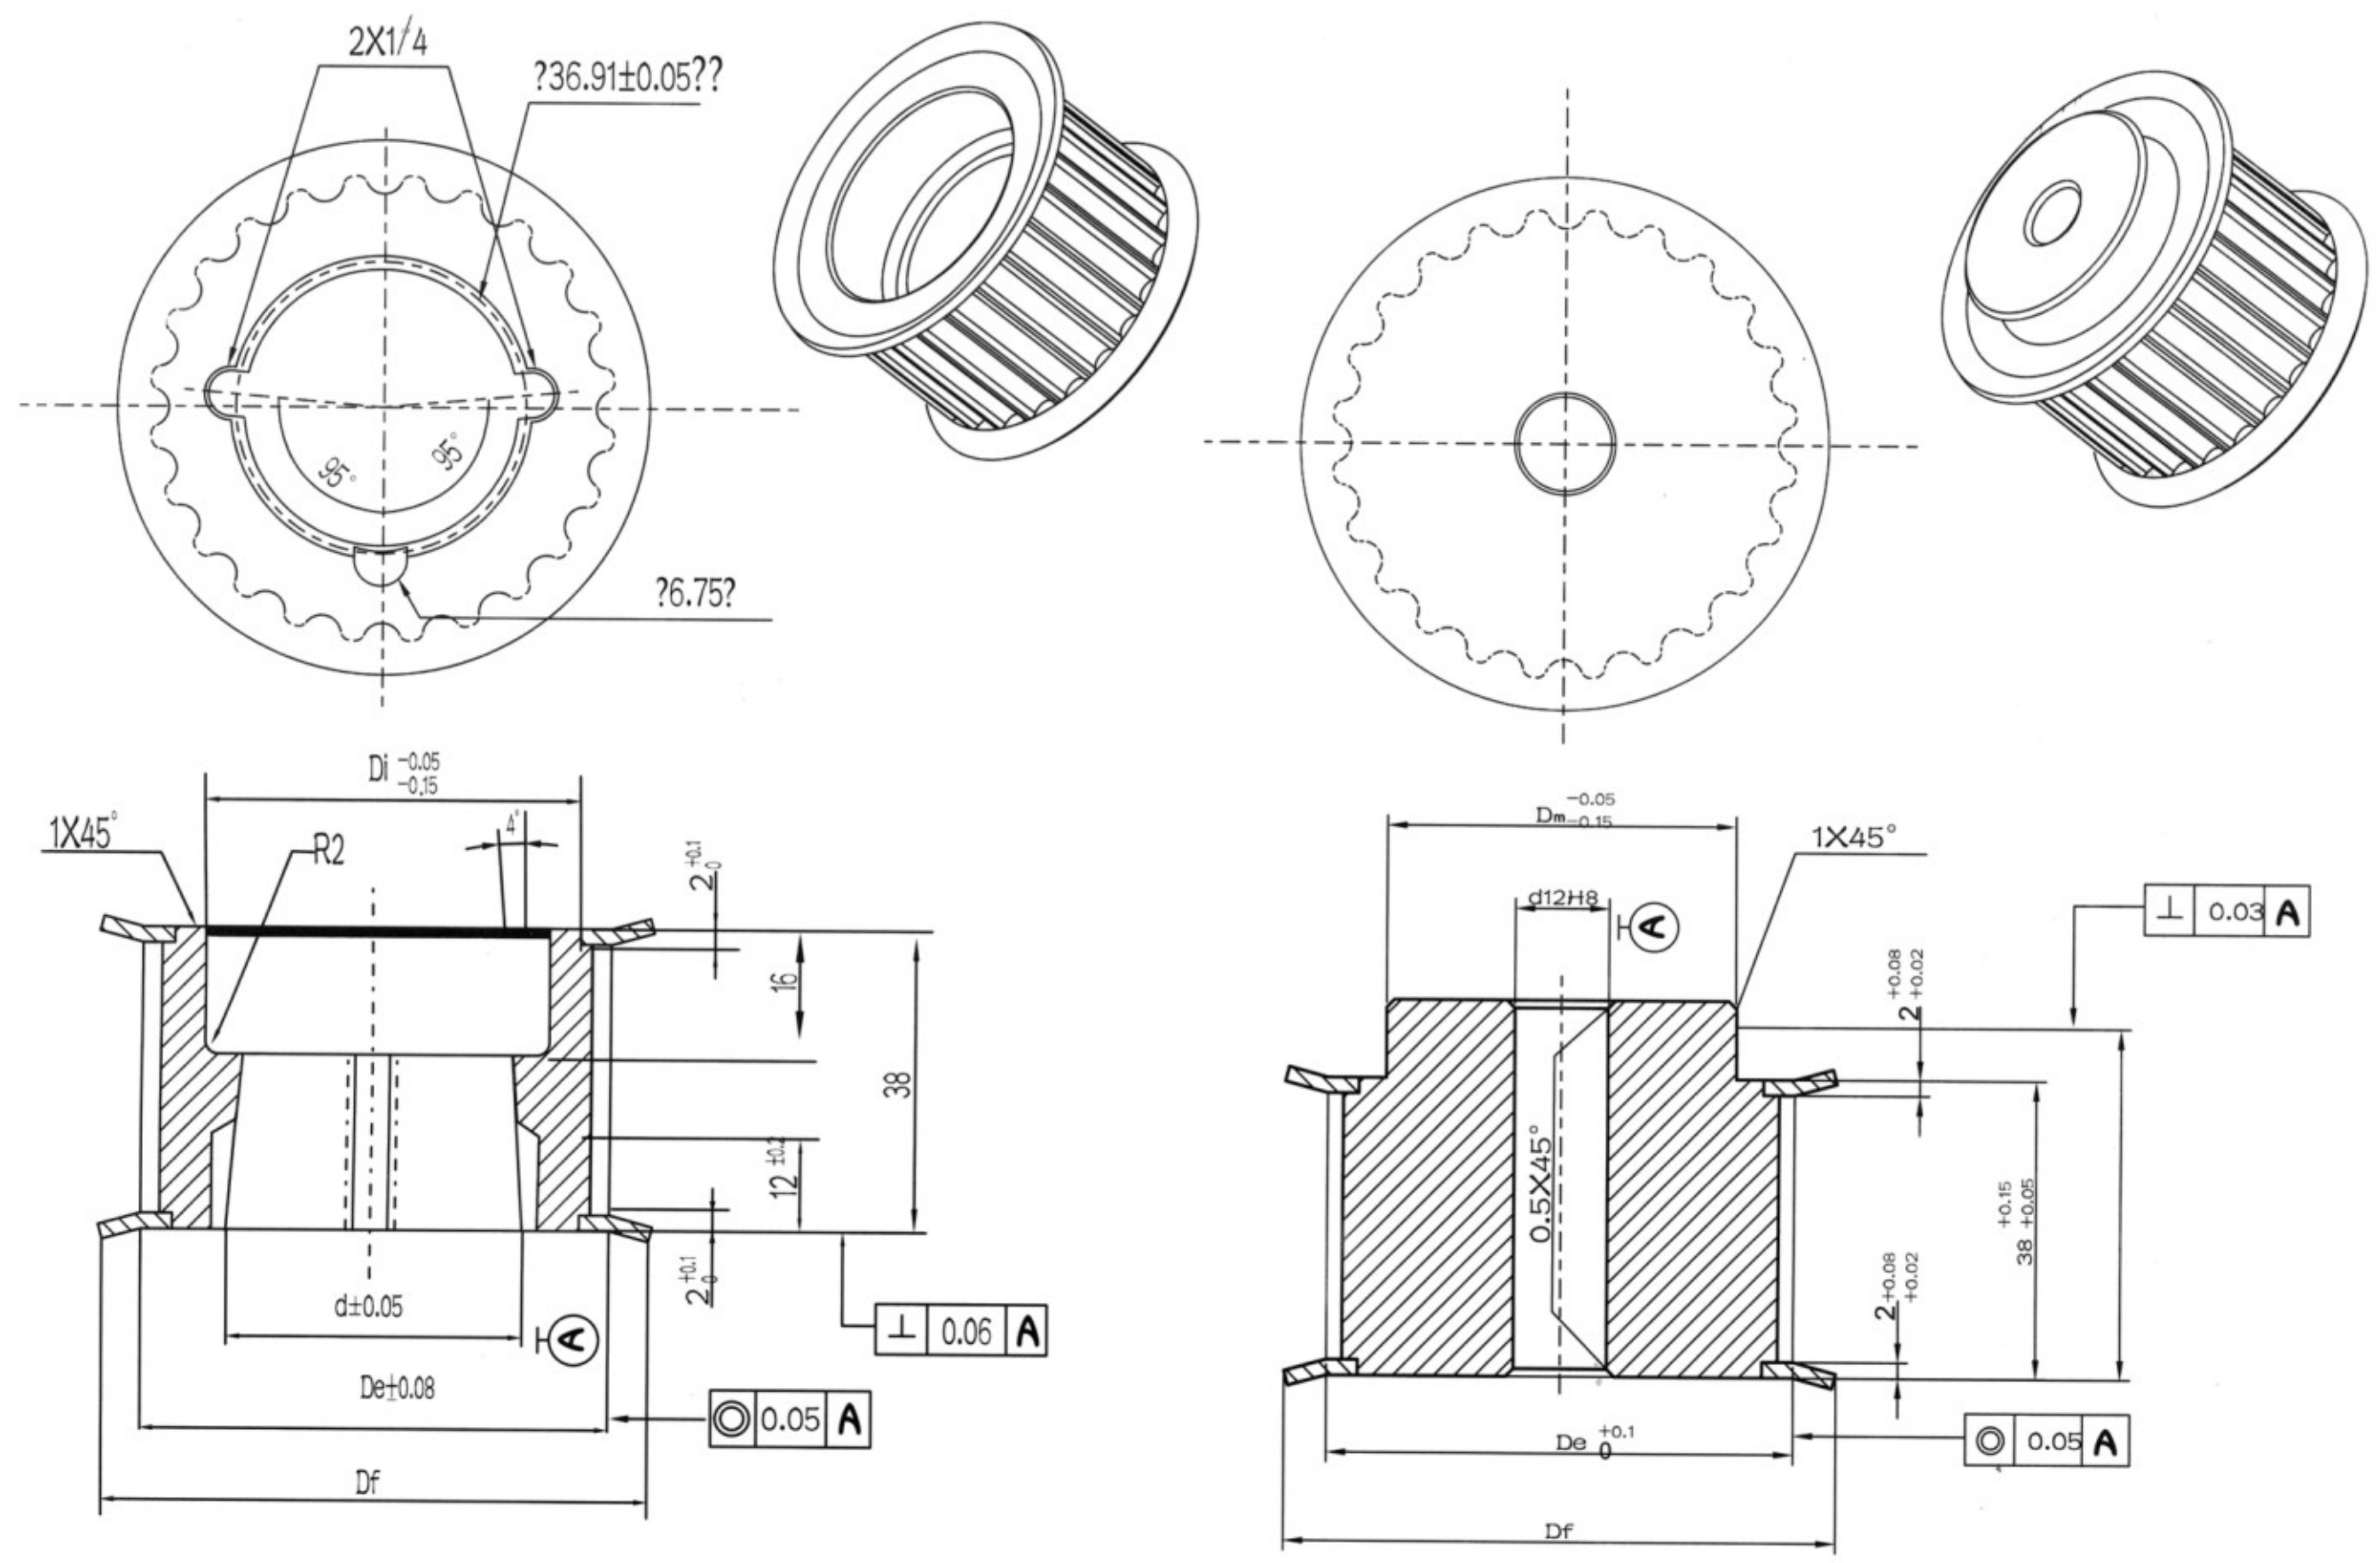

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS



TYPE 型式 0F



TYPE 型式 1F

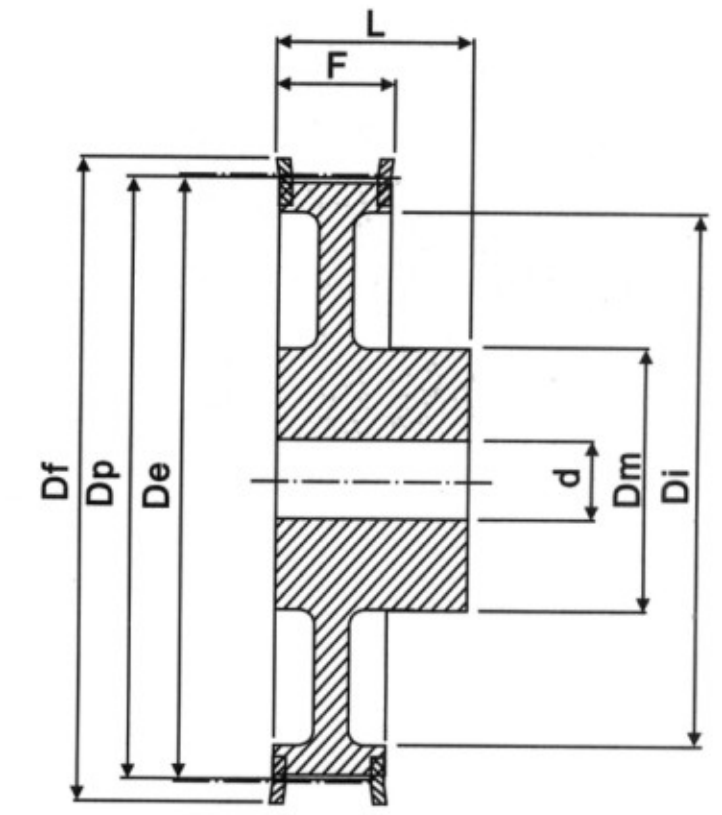

TYPE 型式 2F

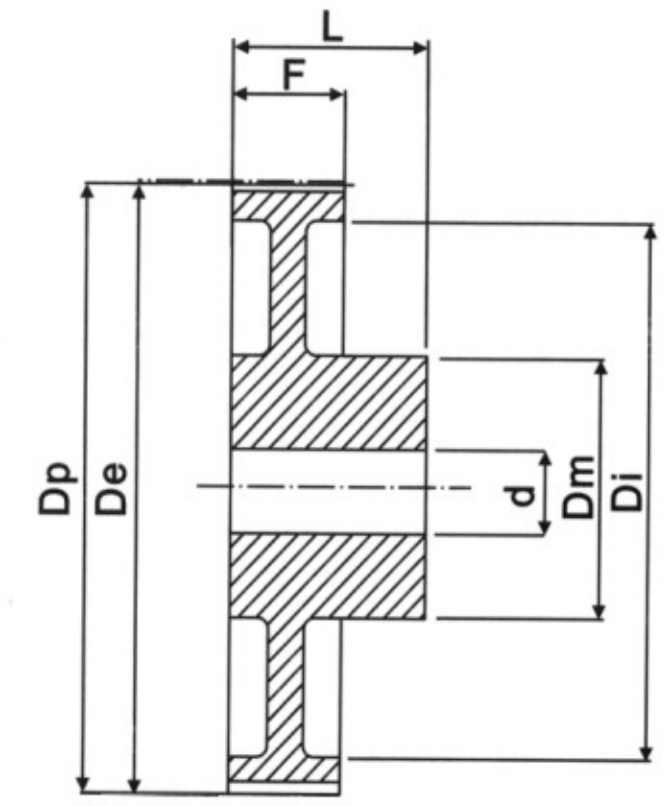

TYPE 型式 3

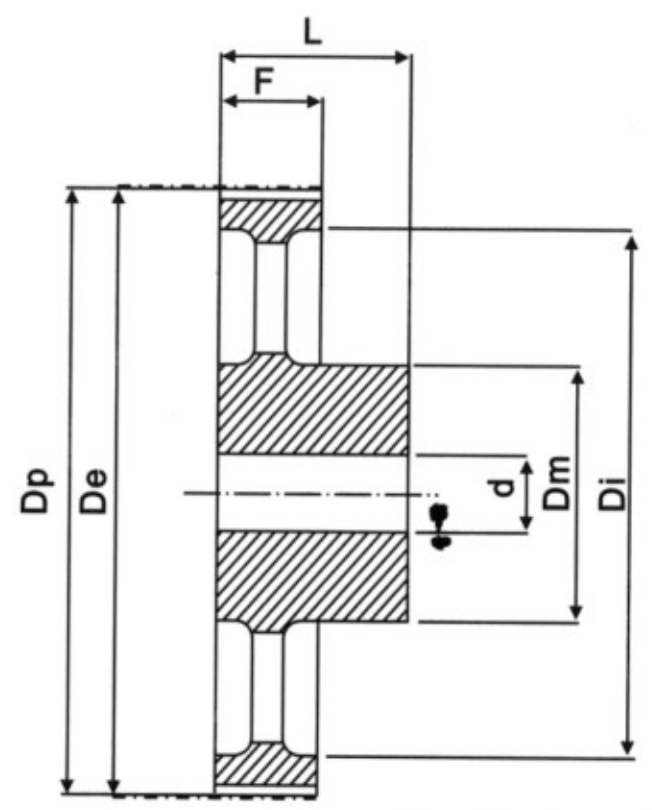

TYPE 型式 4

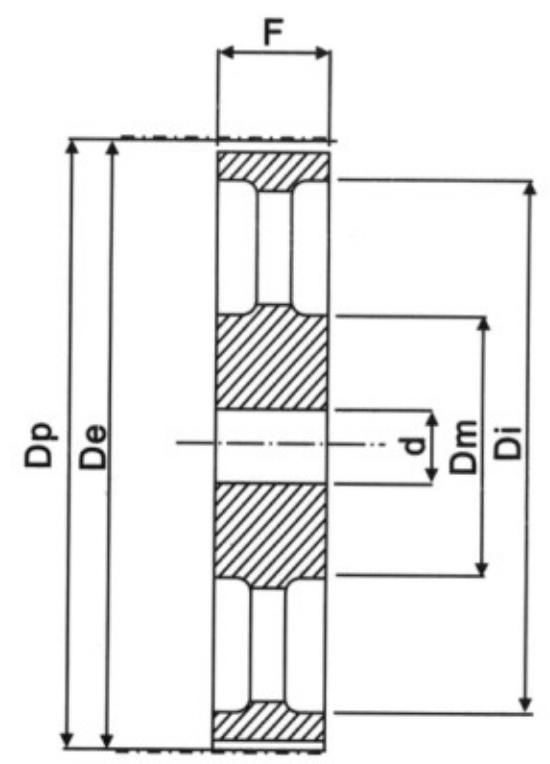

TYPE 型式 5

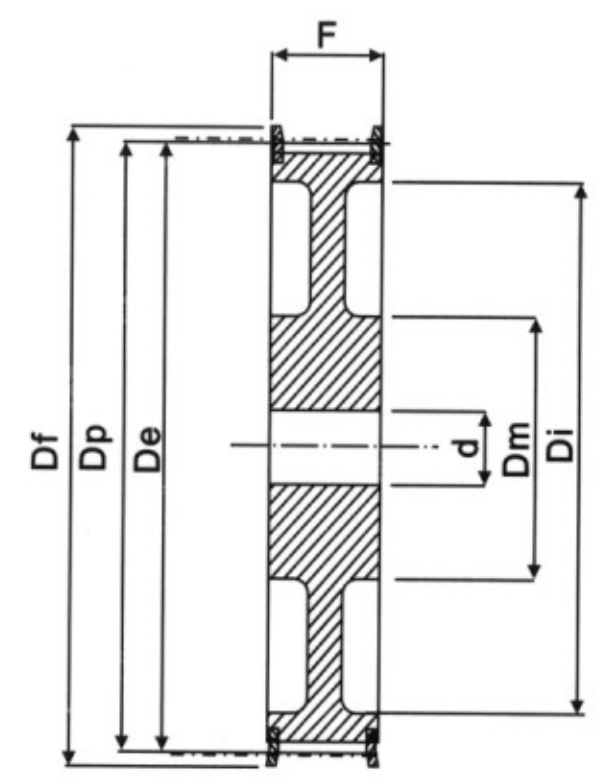

TYPE 型式 6F

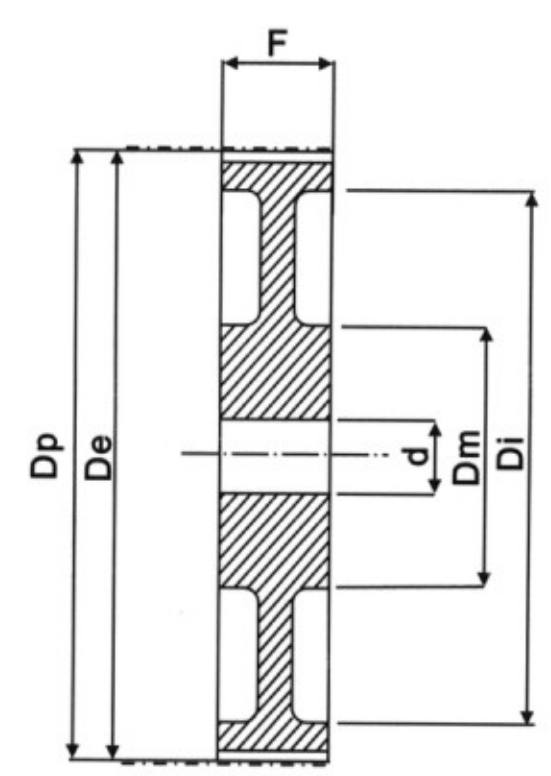

TYPE 型式 7



TYPE 型式 8

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS

HTD 3M-09

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	WITH FLANGE 有擋圈	10-3M-09	0F	10	9.55	8.79	13.0	13.0	10.2	17.5	-
		12-3M-09	0F	12	11.46	10.70	15.0	15.0	10.2	17.5	-
		14-3M-09	0F	14	13.37	12.61	16.0	16.0	10.2	17.5	-
		15-3M-09	0F	15	14.32	13.56	17.5	17.5	10.2	17.5	-
		16-3M-09	1F	16	15.28	14.52	17.5	10.0	12.8	20.6	4.0
		18-3M-09	1F	18	17.19	16.43	20.0	11.0	12.8	20.6	6.0
		20-3M-09	1F	20	19.10	18.34	23.0	12.0	12.8	20.6	6.0
		21-3M-09	1F	21	20.05	19.29	25.0	13.0	12.8	20.6	6.0
		22-3M-09	1F	22	21.01	20.25	25.0	13.0	12.8	20.6	6.0
		24-3M-09	1F	24	22.92	22.16	25.0	13.0	12.8	20.6	6.0
		26-3M-09	1F	26	24.83	24.07	28.0	16.0	12.8	20.6	6.0
		28-3M-09	1F	28	26.74	25.98	32.0	18.0	12.8	20.6	6.0
		30-3M-09	1F	30	28.65	27.89	32.0	20.0	12.8	20.6	6.0
		32-3M-09	1F	32	30.56	29.80	36.0	22.0	12.8	20.6	6.0
		36-3M-09	1F	36	34.38	33.62	39.0	26.0	13.4	22.2	6.0
		40-3M-09	1F	40	38.20	37.44	42.0	28.0	13.4	22.2	6.0
		44-3M-09	1F	44	42.20	41.26	48.0	33.0	13.4	22.2	6.0
	WITHOUT FLANGE 無擋圈	48-3M-09	8	48	45.84	45.08	-	33.0	13.4	22.2	8.0
		60-3M-09	8	60	57.30	56.54	-	33.0	13.4	22.2	8.0
		72-3M-09	8	72	68.75	67.99	-	33.0	13.4	22.2	8.0

HTD 3M-15

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	WITH FLANGE 有擋圈	10-3M-15	0F	10	9.55	8.79	13.0	13.0	17.0	26.0	-
		12-3M-15	0F	12	11.46	10.70	15.0	15.0	17.0	26.0	-
		14-3M-15	0F	14	13.37	12.61	16.0	16.0	17.0	26.0	-
		15-3M-15	0F	15	14.32	13.56	17.5	17.5	17.0	26.0	-
		16-3M-15	1F	16	15.28	14.52	17.5	10.0	19.5	26.0	4.0
		18-3M-15	1F	18	17.19	16.43	20.0	11.0	19.5	26.0	6.0
		20-3M-15	1F	20	19.10	18.34	23.0	12.0	19.5	26.0	6.0
		21-3M-15	1F	21	20.05	19.29	25.0	13.0	19.5	26.0	6.0
		22-3M-15	1F	22	21.01	20.25	25.0	13.0	19.5	26.0	6.0
		24-3M-15	1F	24	22.92	22.16	25.0	13.0	19.5	26.0	6.0
		26-3M-15	1F	26	24.83	24.07	28.0	16.0	19.5	26.0	6.0
		28-3M-15	1F	28	26.74	25.98	32.0	18.0	19.5	26.0	6.0
		30-3M-15	1F	30	28.65	27.89	32.0	20.0	19.5	26.0	6.0
		32-3M-15	1F	32	30.56	29.80	36.0	22.0	19.5	26.0	6.0
		36-3M-15	1F	36	34.38	33.62	39.0	26.0	20.0	30.0	6.0
		40-3M-15	1F	40	38.20	37.44	42.0	28.0	20.0	30.0	6.0
		44-3M-15	1F	44	42.02	41.26	48.0	33.0	20.0	30.0	6.0
	WITHOUT FLANGE 無擋圈	48-3M-15	8	48	45.84	45.08	-	33.0	20.0	30.0	8.0
		60-3M-15	8	60	57.30	56.54	-	33.0	20.0	30.0	8.0
		72-3M-15	8	72	68.75	67.99	-	33.0	20.0	30.0	8.0

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS

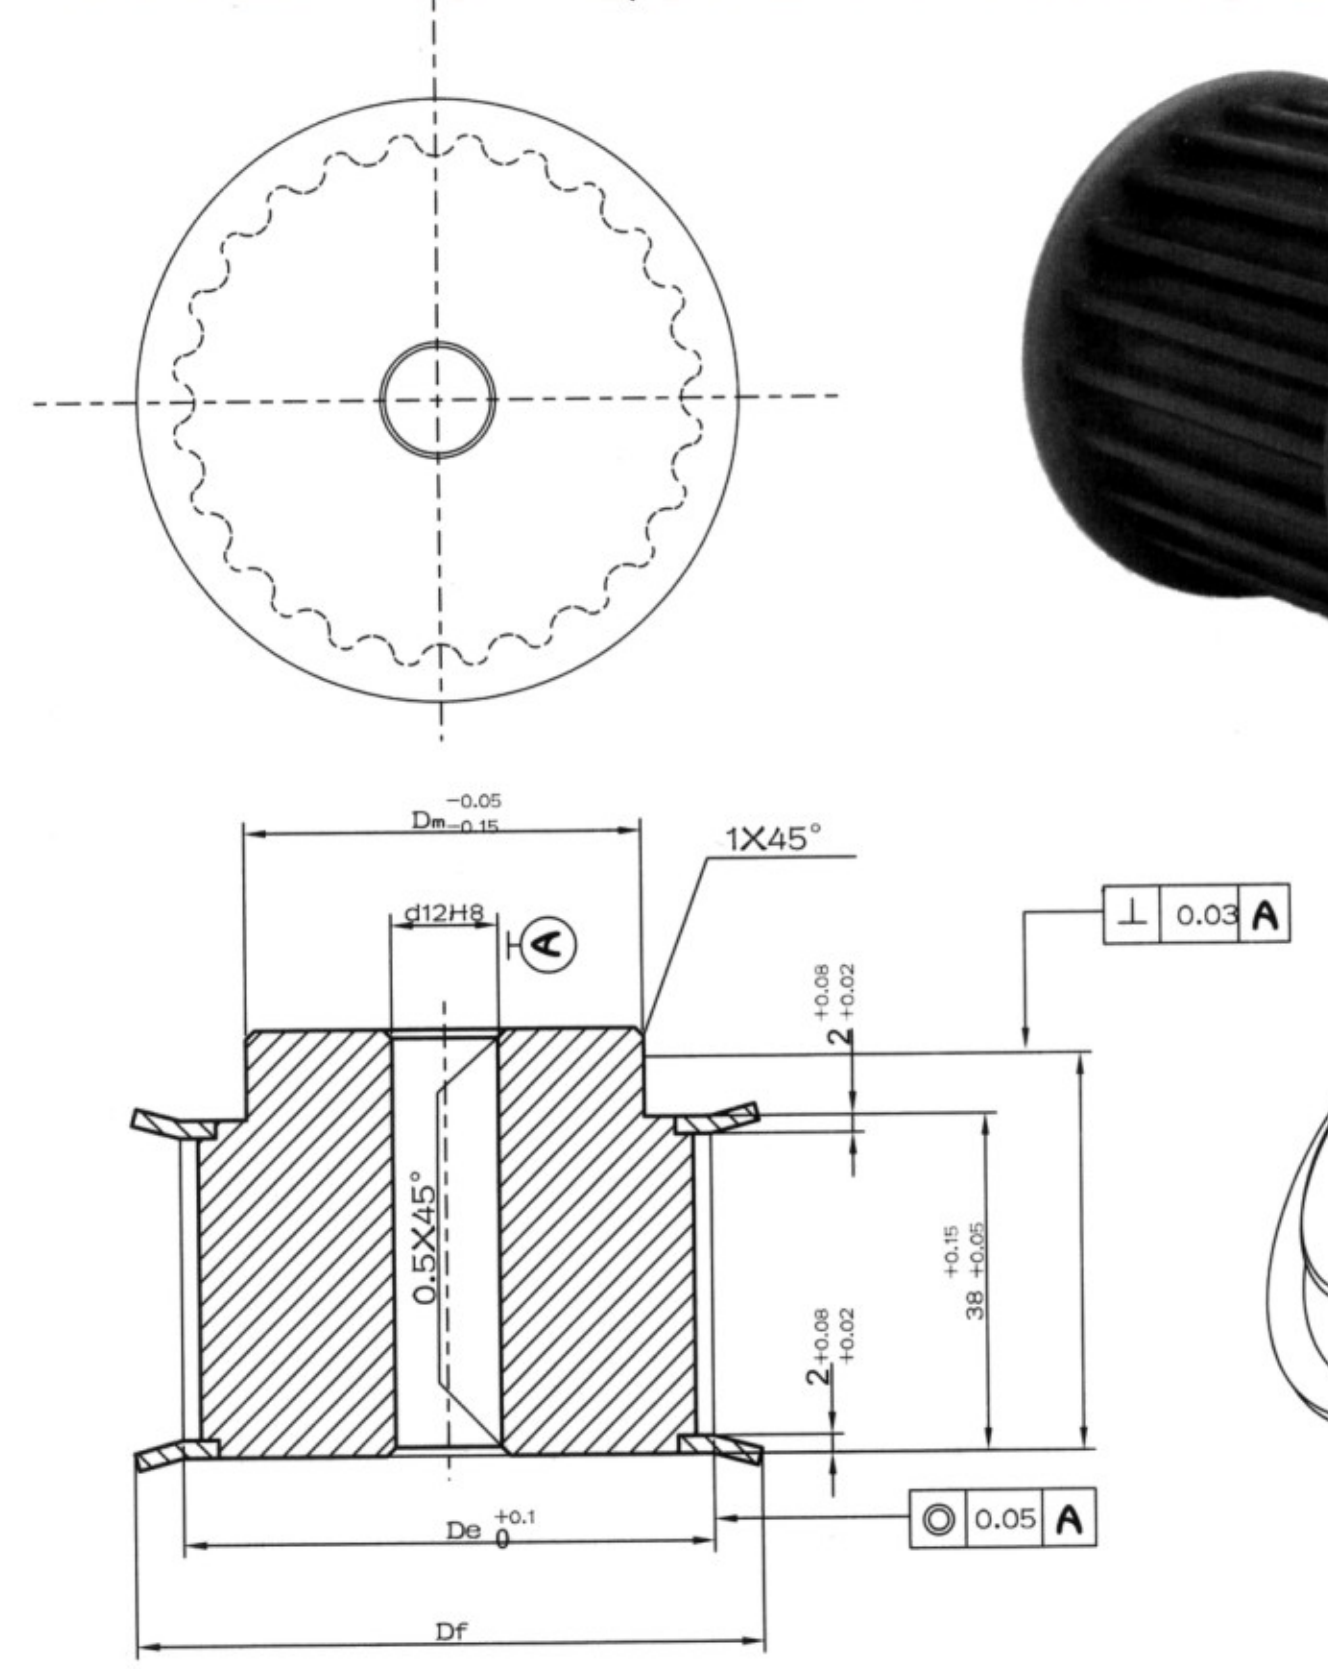

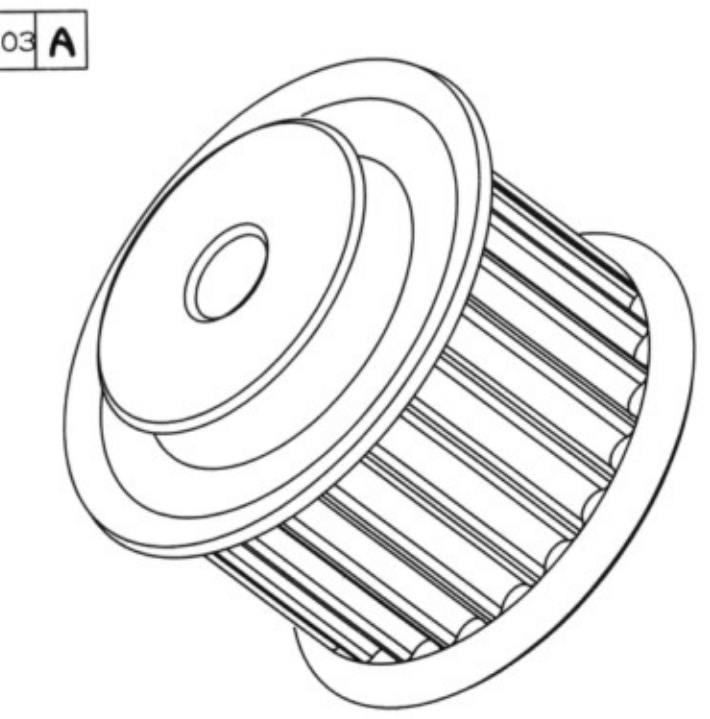

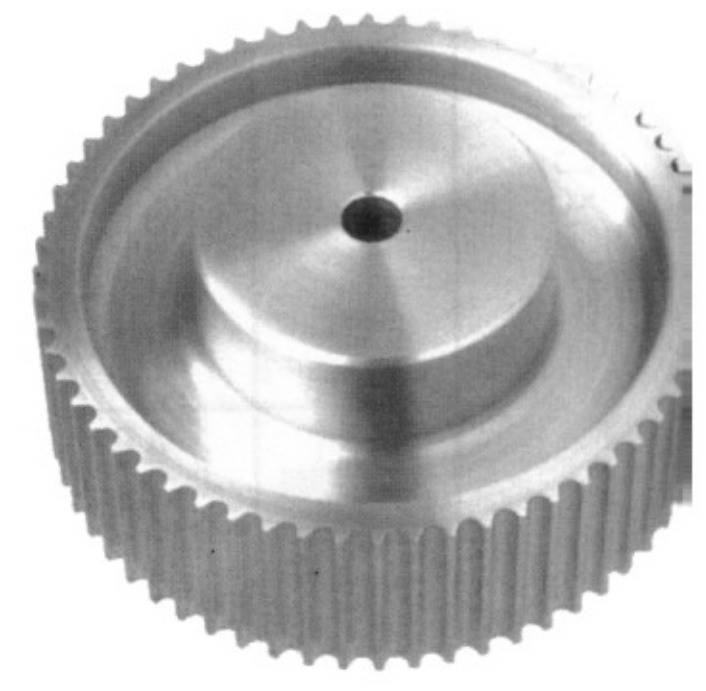

HTD 5M-09

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	12-5M-09	1F	12	19.10	17.96	23.0	12.0	-	14.5	20	4.0
		14-5M-09	1F	14	22.28	21.14	25.0	13.0	-	14.5	20	6.0
		15-5M-09	1F	15	23.87	22.73	28.0	16.0	-	14.5	20	6.0
		16-5M-09	1F	16	25.46	24.32	28.0	16.5	-	14.5	20	6.0
		18-5M-09	1F	18	28.65	27.51	32.0	20.0	-	14.5	20	6.0
		20-5M-09	1F	20	31.83	30.69	36.0	23.0	-	14.5	22.5	6.0
		21-5M-09	1F	21	33.42	32.28	38.0	24.0	-	14.5	22.5	6.0
		22-5M-09	1F	22	35.01	33.87	39.0	25.0	-	14.5	22.5	6.0
		24-5M-09	1F	24	38.20	37.06	42.0	27.0	-	14.5	22.5	6.0
		26-5M-09	1F	26	41.38	40.24	44.0	30.0	-	14.5	22.5	6.0
		28-5M-09	1F	28	44.56	43.42	48.0	30.5	-	14.5	22.5	6.0
		30-5M-09	1F	30	47.75	46.60	51.0	35.0	-	14.5	22.5	6.0
		32-5M-09	1F	32	50.96	49.79	54.0	38.0	-	14.5	22.5	8.0
		36-5M-09	1F	36	57.30	56.16	60.0	38.0	-	14.5	22.5	8.0
		40-5M-09	1F	40	63.66	62.52	71.0	38.0	-	14.5	22.5	8.0
ALUMINIUM 鋁	WITHOUT FLANGE 無擋圈	44-5M-09	3	44	70.03	68.89	-	38.0	54	14.5	25.5	8.0
		48-5M-09	3	48	76.39	75.25	-	38.0	61	14.5	25.5	8.0
		60-5M-09	3	60	95.49	94.35	-	45.0	80	14.5	25.5	8.0
		72-5M-09	3	72	114.59	113.45	-	45.0	100	14.5	25.5	8.0

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理**.

HTD 高品質同步帶輪

HTD HIGH QUALITY TIMING BELT PULLEYS

HTD 5M–15

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	12-5M-15	1F	12	19.10	17.96	23.0	12.0	-	20.5	26.0	-
		14-5M-15	1F	14	22.28	21.14	25.0	13.0	-	20.5	26.0	6.0
		15-5M-15	1F	15	23.87	22.73	28.0	16.0	-	20.5	26.0	6.0
		16-5M-15	1F	16	25.46	24.32	28.0	16.5	-	20.5	26.0	6.0
		18-5M-15	1F	18	28.65	27.51	32.0	20.0	-	20.5	26.0	6.0
		20-5M-15	1F	20	31.83	30.69	36.0	23.0	-	20.5	26.0	6.0
		21-5M-15	1F	21	33.42	32.28	38.0	24.0	-	20.5	26.0	6.0
		22-5M-15	1F	22	35.01	33.87	39.0	25.5	-	20.5	26.0	6.0
		24-5M-15	1F	24	38.20	37.06	42.0	27.0	-	20.5	28.0	6.0
		26-5M-15	1F	26	41.38	40.24	44.0	30.0	-	20.5	28.0	6.0
		28-5M-15	1F	28	44.56	43.42	48.0	30.5	-	20.5	28.0	6.0
		30-5M-15	1F	30	47.75	46.60	51.0	35.0	-	20.5	28.0	6.0
		32-5M-15	1F	32	50.93	49.79	54.0	38.0	-	20.5	28.0	8.0
		36-5M-15	1F	36	57.30	56.16	60.0	38.0	-	20.5	28.0	8.0
		40-5M-15	1F	40	63.66	62.52	71.0	38.0	-	20.5	28.0	8.0
ALUMINIUM 鋁	WITHOUT FLANGE 無擋圈	44-5M-15	3	44	70.03	68.89	-	38.0	54	20.5	30.0	8.0
		48-5M-15	3	48	76.39	75.25	-	38.0	61	20.5	30.0	8.0
		60-5M-15	3	60	95.49	94.35	-	50.0	80	20.5	30.0	8.0
		72-5M-15	3	72	114.59	113.45	-	50.0	100	20.5	30.0	8.0

HTD 5M–25

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	12-5M-25	1F	12	19.10	17.96	23.0	12.0	-	30.5	36.0	-
		14-5M-25	1F	14	22.28	21.14	25.0	13.0	-	30.5	36.0	6.0
		15-5M-25	1F	15	23.87	22.73	28.0	16.0	-	30.5	36.0	6.0
		16-5M-25	1F	16	25.46	24.32	28.0	16.5	-	30.5	36.0	6.0
		18-5M-25	1F	18	28.65	27.51	32.0	20.0	-	30.5	36.0	6.0
		20-5M-25	1F	20	31.83	30.69	36.0	23.0	-	30.5	36.0	6.0
		21-5M-25	1F	21	33.42	32.28	38.0	24.0	-	30.5	38.0	6.0
		22-5M-25	1F	22	35.01	33.87	39.0	25.5	-	30.5	38.0	6.0
		24-5M-25	1F	24	38.20	37.06	42.0	27.0	-	30.5	38.0	6.0
		26-5M-25	1F	26	41.38	40.24	44.0	30.0	-	30.5	38.0	6.0
		28-5M-25	1F	28	44.56	43.42	48.0	30.5	-	30.5	38.0	6.0
		30-5M-25	1F	30	47.75	46.60	51.0	35.0	-	30.5	38.0	6.0
		32-5M-25	1F	32	50.93	49.79	54.0	38.0	-	30.5	38.0	8.0
		36-5M-25	1F	36	57.30	56.16	60.0	38.0	-	30.5	38.0	8.0
		40-5M-25	1F	40	63.66	62.52	71.0	38.0	-	30.5	38.0	8.0
ALUMINIUM 鋁	WITHOUT FLANGE 無擋圈	44-5M-25	8	44	70.03	68.89	-	38.0	-	30.5	40.0	8.0
		48-5M-25	3	48	76.39	75.25	-	38.0	61	30.5	40.0	8.0
		60-5M-25	3	60	95.49	94.35	-	50.0	80	30.5	40.0	8.0
		72-5M-25	3	72	114.59	113.45	-	50.0	100	30.5	40.0	8.0

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

SILVERTECH 銀科工業

HTD 高品質同步帶輪

HTD HIGH QUALITY TIMING BELT PULLEYS

HTD 8M–20

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	22-8M-20	1F	22	56.02	54.65	60	43	-	28	38	12
		24-8M-20	1F	24	61.12	59.75	66	45	-	28	38	12
		26-8M-20	1F	26	66.21	64.85	70	48	-	28	38	12
		28-8M-20	1F	28	71.30	70.08	75	50	-	28	38	15
		30-8M-20	1F	30	76.39	75.13	82.5	55	-	28	38	15
		32-8M-20	1F	32	81.49	80.16	87	60	-	28	38	15
		34-8M-20	1F	34	86.58	85.22	91	66	-	28	38	15
		36-8M-20	1F	36	91.67	90.30	97	70	-	28	38	15
		38-8M-20	1F	38	96.77	95.39	102	75	-	28	38	15
		40-8M-20	1F	40	101.86	100.49	106	75	-	28	38	15
		44-8M-20	1F	44	112.05	110.67	120	75	-	28	38	15
		48-8M-20	1F	48	122.23	120.86	128	75	-	28	38	15
		56-8M-20	2F	56	142.60	141.23	150	80	116	28	38	15
		64-8M-20	2F	64	162.97	161.60	168	80	137	28	38	15
		72-8M-20	2F	72	183.35	181.97	192	80	158	28	38	15
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	80-8M-20	3	80	203.72	202.35	-	90	180	28	38	15
		90-8M-20	3	90	229.18	227.81	-	90	204	28	38	15
		112-8M-20	4	112	285.21	283.83	-	90	254	28	38	18
		144-8M-20	4	144	366.69	365.32	-	90	336	28	38	20
		168-8M-20	4	168	427.81	426.44	-	100	400	28	38	20
		192-8M-20	4	192	488.92	487.55	-	100	460	28	38	20

HTD 8M–30

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	22-8M-30	1F	22	56.02	54.65	60	43	-	38	48	12
		24-8M-30	1F	24	61.12	59.75	66	45	-	38	48	12
		26-8M-30	1F	26	66.21	64.85	70	48	-	38	48	12
		28-8M-30	1F	28	71.30	70.08	75	50	-	38	48	15
		30-8M-30	1F	30	76.39	75.13	82.5	55	-	38	48	15
		32-8M-30	1F	32	81.49	80.16	87	60	-	38	48	15
		34-8M-30	1F	34	86.58	85.22	91	66	-	38	48	15
		36-8M-30	1F	36	91.67	90.30	97	70	-	38	48	15
		38-8M-30	1F	38	96.77	95.39	102	75	-	38	48	15
		40-8M-30	1F	40	101.86	100.49	106	75	-	38	48	15
		44-8M-30	1F	44	112.05	110.67	120	75	-	38	48	15
		48-8M-30	1F	48	122.23	120.86	128	75	-	38	48	15
		56-8M-30	2F	56	142.60	141.23	150	90	116	38	48	15
		64-8M-30	2F	64	162.97	161.60	168	90	137	38	48	15
		72-8M-30	2F	72	183.35	181.97	192	95	158	38	48	15
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	80-8M-30	3	80	203.72	202.35	-	100	180	38	48	15
		90-8M-30	3	90	229.18	227.81	-	100	204	38	48	15
		112-8M-30	4	112	285.21	283.83	-	100	254	38	48	18
		144-8M-30	4	144	366.69	365.32	-	100	336	38	48	20
		168-8M-30	4	168	427.81	426.44	-	100	400	38	48	20
		192-8M-30	4	192	488.92	487.55	-	100	460	38	48	20

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS

HTD 8M–50

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	22-8M-50	1F	22	56.02	54.65	60	43	-	60	70	-
		24-8M-50	1F	24	61.12	59.75	66	45	-	60	70	-
		26-8M-50	1F	26	66.21	64.85	70	48	-	60	70	-
		28-8M-50	1F	28	71.30	70.08	75	50	-	60	70	-
		30-8M-50	1F	30	76.39	75.13	82.5	55	-	60	70	-
		32-8M-50	1F	32	81.49	80.16	87	60	-	60	70	-
		34-8M-50	1F	34	86.58	85.22	91	66	-	60	70	-
		36-8M-50	1F	36	91.67	90.30	97	70	-	60	70	-
		38-8M-50	1F	38	96.77	95.39	102	75	-	60	70	-
		40-8M-50	1F	40	101.86	100.49	106	75	-	60	70	-
		44-8M-50	1F	44	112.05	110.67	120	75	-	60	70	-
		48-8M-50	1F	48	122.23	120.86	128	80	-	60	70	-
		56-8M-50	6F	56	142.60	141.23	150	90	116	60	70	18
		64-8M-50	6F	64	162.97	161.60	168	100	137	60	70	18
		72-8M-50	6F	72	183.35	181.97	192	100	158	60	70	18
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	80-8M-50	7	80	203.72	202.35	-	110	180	60	70	18
		90-8M-50	7	90	229.18	227.81	-	110	204	60	70	18
		112-8M-50	5	112	285.21	283.83	-	110	254	60	70	18
		144-8M-50	5	144	366.69	365.32	-	110	336	60	70	20
		168-8M-50	5	168	427.81	426.44	-	120	400	60	70	20
		192-8M-50	5	192	488.92	487.55	-	130	460	60	70	20

HTD 8M–85

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	22-8M-85	1F	22	56.02	54.65	60	43	-	95	105	-
		24-8M-85	1F	24	61.12	59.75	66	45	-	95	105	-
		26-8M-85	1F	26	66.21	64.85	70	48	-	95	105	-
		28-8M-85	1F	28	71.30	70.08	75	50	-	95	105	-
		30-8M-85	1F	30	76.39	75.13	82.5	55	-	95	105	-
		32-8M-85	1F	32	81.49	80.16	87	60	-	95	105	-
		34-8M-85	1F	34	86.58	85.22	91	66	-	95	105	-
		36-8M-85	1F	36	91.67	90.30	97	70	-	95	105	-
		38-8M-85	1F	38	96.77	95.39	102	75	-	95	105	-
		40-8M-85	1F	40	101.86	100.49	106	75	-	95	105	-
		44-8M-85	1F	44	112.05	110.67	120	75	-	95	105	-
		48-8M-85	1F	48	122.23	120.86	128	80	-	95	105	-
		56-8M-85	1F	56	142.60	141.23	150	80	-	95	105	20
		64-8M-85	6F	64	162.97	161.60	168	100	137	95	95	20
		72-8M-85	6F	72	183.35	181.97	192	110	158	95	95	20
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	80-8M-85	5	80	203.72	202.35	-	110	180	95	95	20
		90-8M-85	5	90	229.18	227.81	-	110	204	95	95	20
		112-8M-85	5	112	285.21	283.83	-	110	254	95	95	24
		144-8M-85	5	144	366.69	365.32	-	120	336	95	95	24
		168-8M-85	5	168	427.81	426.44	-	120	400	95	95	24
		192-8M-85	5	192	488.92	487.55	-	130	460	95	95	24

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS

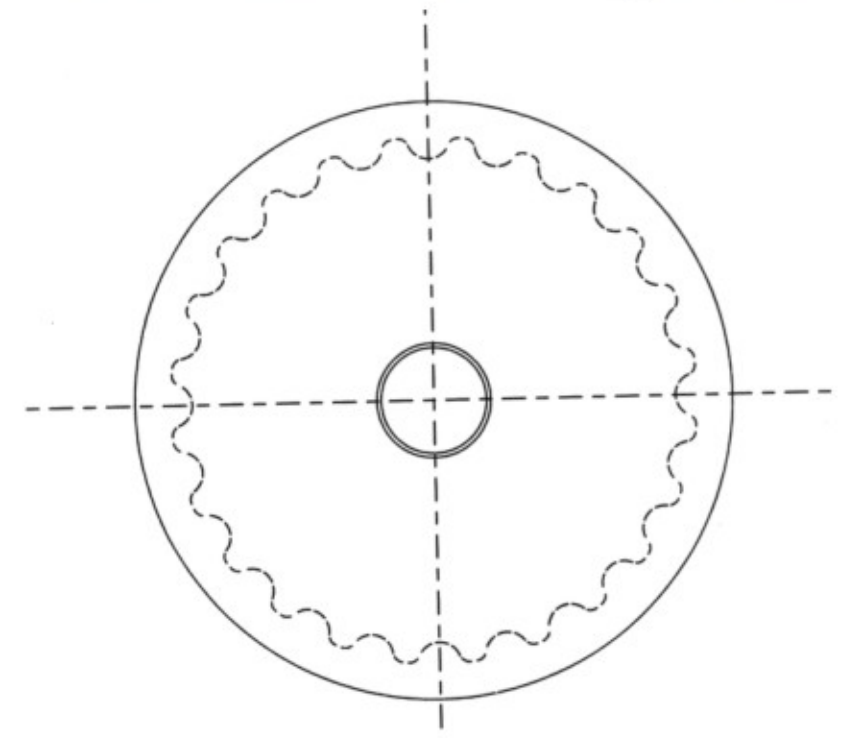

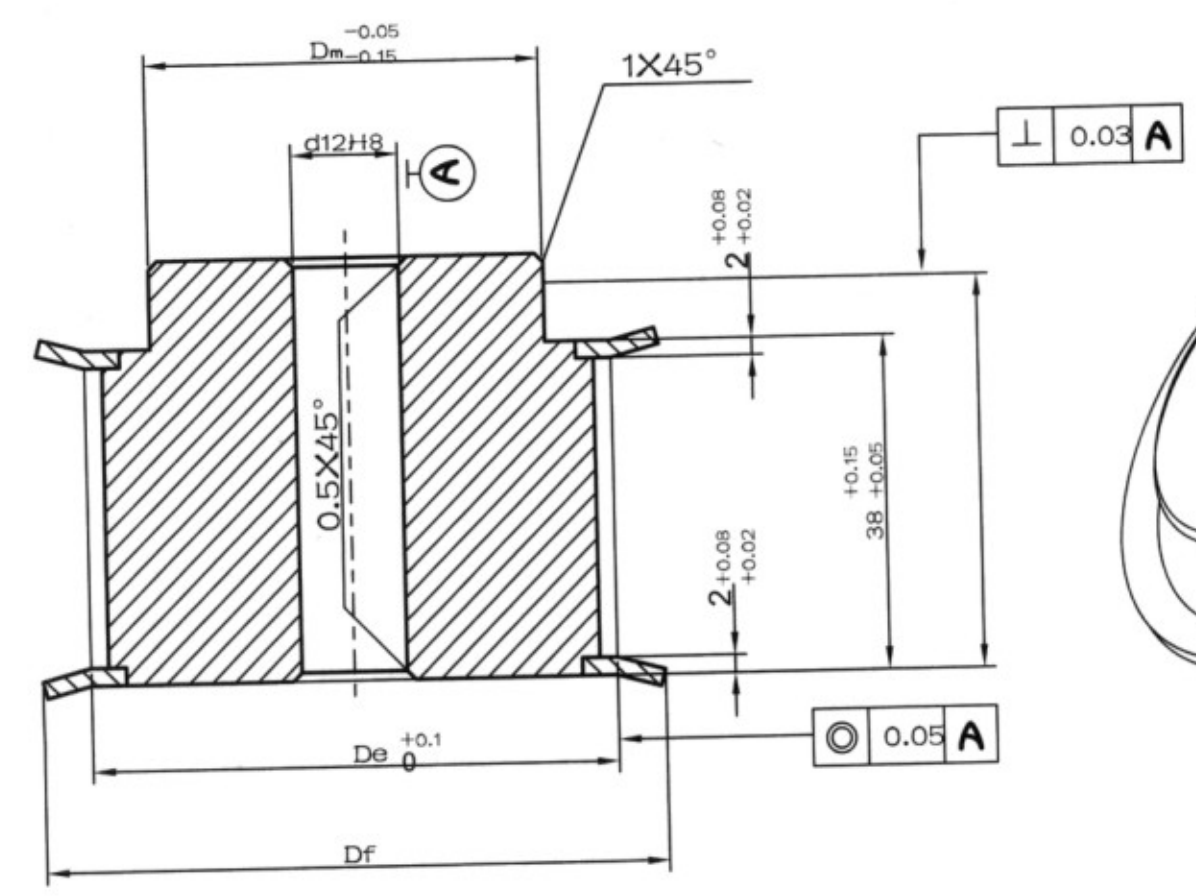

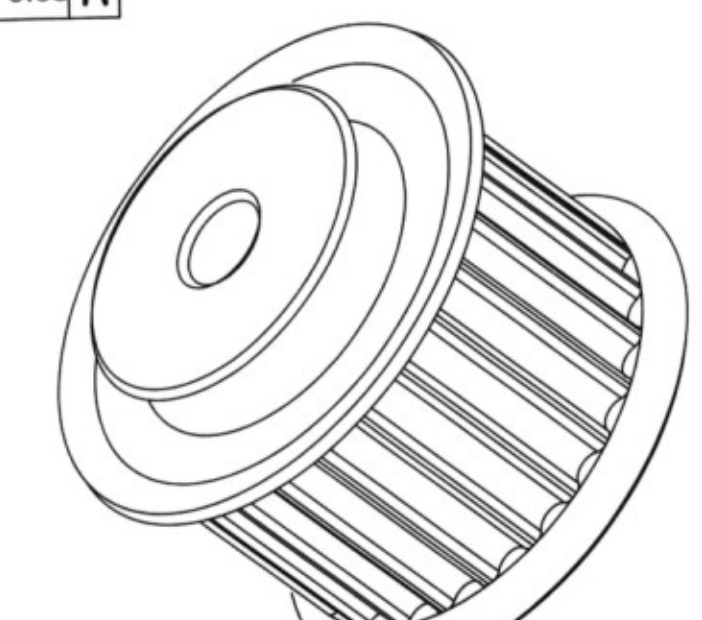
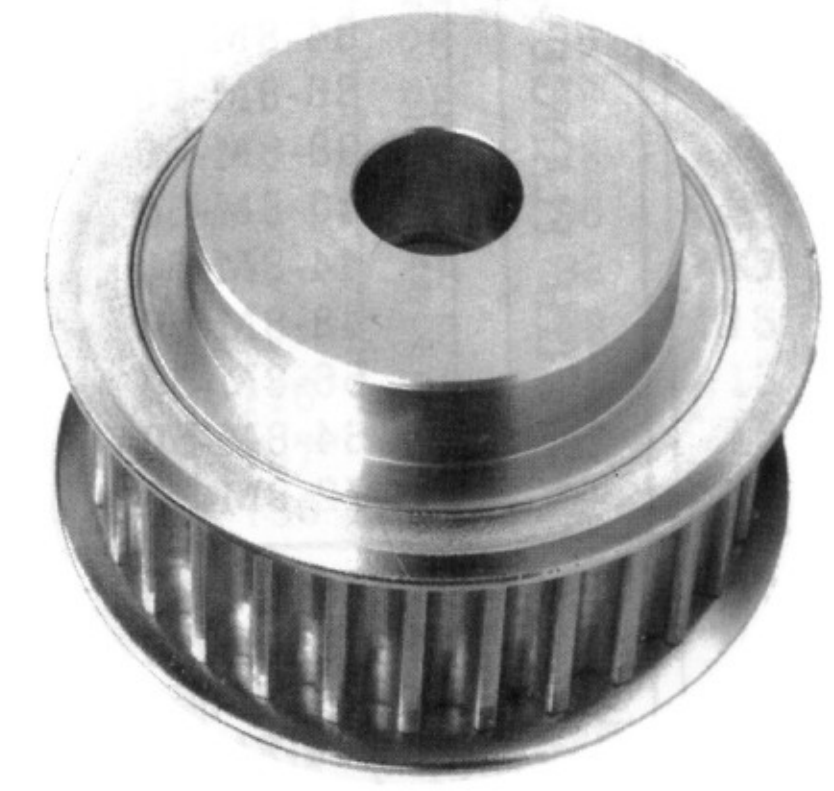

HTD 14M–40

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	28-14M-40	1F	28	124.78	122.12	128	100	-	54	69	24
		29-14M-40	1F	29	129.23	126.57	138	100	-	54	69	24
		30-14M-40	1F	30	133.69	130.99	138	100	-	54	69	24
		32-14M-40	1F	32	142.60	139.88	154	100	-	54	69	24
		34-14M-40	1F	34	151.52	148.79	160	100	-	54	69	24
		36-14M-40	1F	36	160.43	157.68	168	100	-	54	69	24
		38-14M-40	1F	38	169.34	166.60	183	120	-	54	69	24
		40-14M-40	1F	40	178.25	175.49	188	120	-	54	69	24
		44-14M-40	1F	44	196.08	193.28	211	120	-	54	69	24
		48-14M-40	2F	48	213.90	211.11	226	135	170	54	69	24
		56-14M-40	2F	56	249.55	246.76	256	135	207	54	69	28
		64-14M-40	2F	64	285.21	282.41	296	135	240	54	69	28
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	72-14M-40	4	72	320.86	318.06	-	135	278	54	69	28
		80-14M-40	4	80	356.51	353.51	-	135	314	54	69	28
		90-14M-40	4	90	401.07	398.28	-	135	358	54	69	28
		112-14M-40	4	112	499.11	496.32	-	135	456	54	69	28
		144-14M-40	4	144	641.71	638.92	-	135	600	54	69	28
		168-14M-40	4	168	748.66	745.87	-	135	706	54	69	28
		192-14M-40	4	192	855.62	852.82	-	135	813	54	69	28
		216-14M-40	4	216	962.57	959.76	-	150	920	54	69	28

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS

HTD 14M-55

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	28-14M-55	1F	28	124.78	122.12	128	100	-	70	85	24
		29-14M-55	1F	29	129.23	126.57	138	100	-	70	85	24
		30-14M-55	1F	30	133.69	130.99	138	100	-	70	85	24
		32-14M-55	1F	32	142.60	139.88	154	100	-	70	85	24
		34-14M-55	1F	34	151.52	148.79	160	100	-	70	85	24
		36-14M-55	1F	36	160.43	157.68	168	100	-	70	85	24
		38-14M-55	1F	38	169.34	166.60	183	120	-	70	85	24
		40-14M-55	1F	40	178.25	175.49	188	120	-	70	85	24
		44-14M-55	1F	44	196.08	193.28	211	120	-	70	85	24
CAST IRON 鑄鐵		48-14M-55	6F	48	213.90	211.11	226	135	170	70	70	24
		56-14M-55	6F	56	249.55	246.76	256	135	207	70	70	28
		64-14M-55	6F	64	285.21	282.41	296	135	240	70	70	28
	WITHOUT FLANGE 無擋圈	72-14M-55	5	72	320.86	318.06	-	135	278	70	70	28
		80-14M-55	5	80	356.51	353.51	-	135	314	70	70	28
		90-14M-55	5	90	401.07	398.28	-	135	358	70	70	28
		112-14M-55	5	112	499.11	496.32	-	135	456	70	70	28
		144-14M-55	5	144	641.71	638.92	-	135	600	70	70	28
		168-14M-55	5	168	748.66	745.87	-	135	706	70	70	28
		192-14M-55	5	192	855.62	852.82	-	135	813	70	70	28
		216-14M-55	5	216	962.57	959.76	-	150	920	70	70	28

HTD 14M-85

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	28-14M-85	1F	28	124.78	122.12	128	100	-	102	117	-
		29-14M-85	1F	29	129.23	126.57	138	100	-	102	117	-
		30-14M-85	1F	30	133.69	130.99	138	100	-	102	117	-
		32-14M-85	1F	32	142.60	139.88	154	100	-	102	117	-
		34-14M-85	1F	34	151.52	148.79	160	100	-	102	117	-
		36-14M-85	1F	36	160.43	157.68	168	100	-	102	117	-
		38-14M-85	1F	38	169.34	166.60	183	120	-	102	117	-
		40-14M-85	1F	40	178.25	175.49	188	135	-	102	117	-
		44-14M-85	1F	44	196.08	193.28	211	135	-	102	117	-
CAST IRON 鑄鐵		48-14M-85	1F	48	213.90	211.11	226	150	-	102	117	-
		56-14M-85	6F	56	249.55	246.76	256	150	207	102	102	32
		64-14M-85	6F	64	285.21	282.41	296	150	240	102	102	32
	WITHOUT FLANGE 無擋圈	72-14M-85	5	72	320.86	318.06	-	150	278	102	102	32
		80-14M-85	5	80	356.51	353.51	-	150	314	102	102	32
		90-14M-85	5	90	401.07	398.28	-	150	358	102	102	32
		112-14M-85	5	112	499.11	496.32	-	150	456	102	102	32
		144-14M-85	5	144	641.71	638.92	-	150	600	102	102	32
		168-14M-85	5	168	748.66	745.87	-	150	706	102	102	32
		192-14M-85	5	192	855.62	852.82	-	165	813	102	102	32
		216-14M-85	5	216	962.57	959.76	-	165	920	102	102	32

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

SILVERTECH 銀科工業

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS

HTD 14M-115

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	28-14M-115	1F	28	124.78	122.12	128	100	-	133	148	-
		29-14M-115	1F	29	129.23	126.57	138	100	-	133	148	-
		30-14M-115	1F	30	133.69	130.99	138	100	-	133	148	-
		32-14M-115	1F	32	142.60	139.88	154	100	-	133	148	-
		34-14M-115	1F	34	151.52	148.79	160	100	-	133	148	-
		36-14M-115	1F	36	160.43	157.68	168	120	-	133	148	-
		38-14M-115	1F	38	169.34	166.60	183	120	-	133	148	-
		40-14M-115	1F	40	178.25	175.49	188	135	-	133	148	-
		44-14M-115	1F	44	196.08	193.28	211	140	-	133	148	-
		48-14M-115	1F	48	213.90	211.11	226	150	-	133	148	-
		56-14M-115	1F	56	249.55	246.76	256	150	-	133	148	-
CAST IRON 鑄鐵		64-14M-115	6F	64	285.21	282.41	296	150	240	133	133	32
	WITHOUT FLANGE 無擋圈	72-14M-115	5	72	320.86	318.06	-	150	278	133	133	32
		80-14M-115	5	80	356.51	353.51	-	150	314	133	133	32
		90-14M-115	5	90	401.07	398.28	-	150	358	133	133	32
		112-14M-115	5	112	499.11	496.32	-	150	456	133	133	32
		144-14M-115	5	144	641.71	638.92	-	165	600	133	133	32
		168-14M-115	5	168	748.66	745.87	-	165	706	133	133	32
		192-14M-115	5	192	855.62	852.82	-	165	813	133	133	32
		216-14M-115	5	216	962.57	959.76	-	165	920	133	133	32

HTD 14M-170

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	28-14M-170	1F	28	124.78	122.12	128	100	-	187	202	-
		29-14M-170	1F	29	129.23	126.57	138	100	-	187	202	-
		30-14M-170	1F	30	133.69	130.99	138	100	-	187	202	-
		32-14M-170	1F	32	142.60	139.88	154	100	-	187	202	-
		34-14M-170	1F	34	151.52	148.79	160	100	-	187	202	-
		36-14M-170	1F	36	160.43	157.68	168	120	-	187	202	-
		38-14M-170	1F	38	169.34	166.60	183	135	-	187	202	-
		40-14M-170	1F	40	178.25	175.49	188	140	-	187	202	-
		44-14M-170	1F	44	196.08	193.28	211	160	-	187	202	-
		48-14M-170	1F	48	213.90	211.11	226	160	-	187	202	-
		56-14M-170	1F	56	249.55	246.76	256	160	-	187	202	-
CAST IRON 鑄鐵		64-14M-170	1F	64	285.21	282.41	296	180	-	187	202	-
	WITHOUT FLANGE 無擋圈	72-14M-170	7	72	320.86	318.06	-	180	278	187	187	32
		80-14M-170	7	80	356.51	353.51	-	180	314	187	187	32
		90-14M-170	5	90	401.07	398.28	-	180	358	187	187	38
		112-14M-170	5	112	499.11	496.32	-	200	456	187	187	38
		144-14M-170	5	144	641.71	638.92	-	220	600	187	187	38
		168-14M-170	5	168	748.66	745.87	-	220	706	187	187	38
		192-14M-170	5	192	855.62	852.82	-	220	813	187	187	38
		216-14M-170	5	216	962.57	959.76	-	220	920	187	187	38

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

同步帶輪系列 TIMING PULLEY

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS



HYPE 型式 1F



HYPE 型式 2F



HYPE 型式 3F



HYPE 型式 4



HYPE 型式 5F

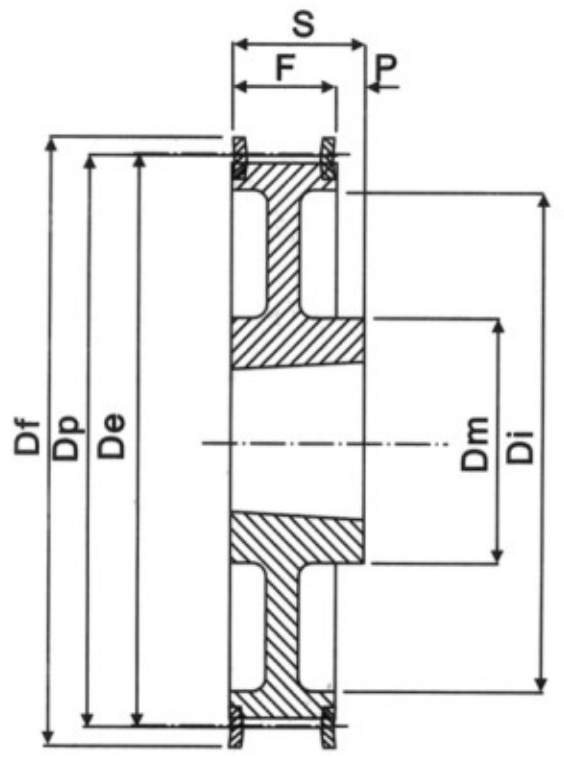

HYPE 型式 6F

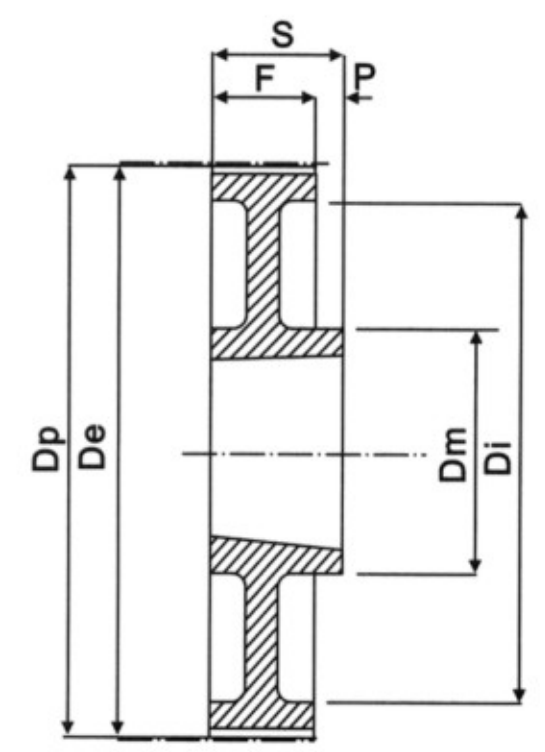

HYPE 型式 7

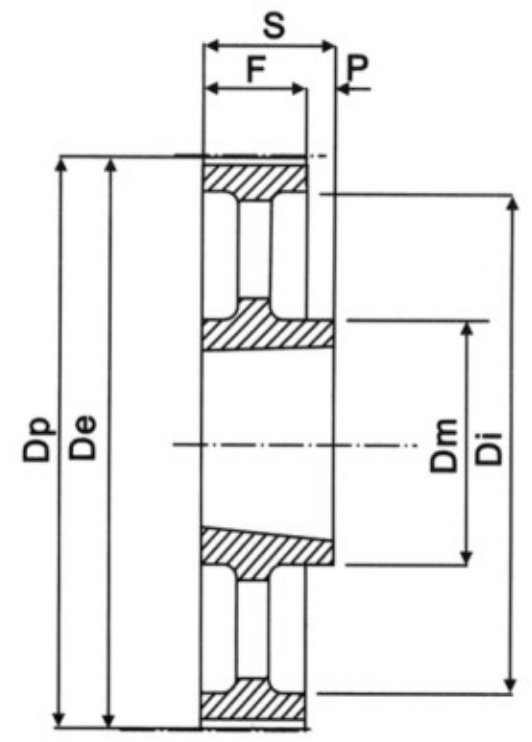

HYPE 型式 8

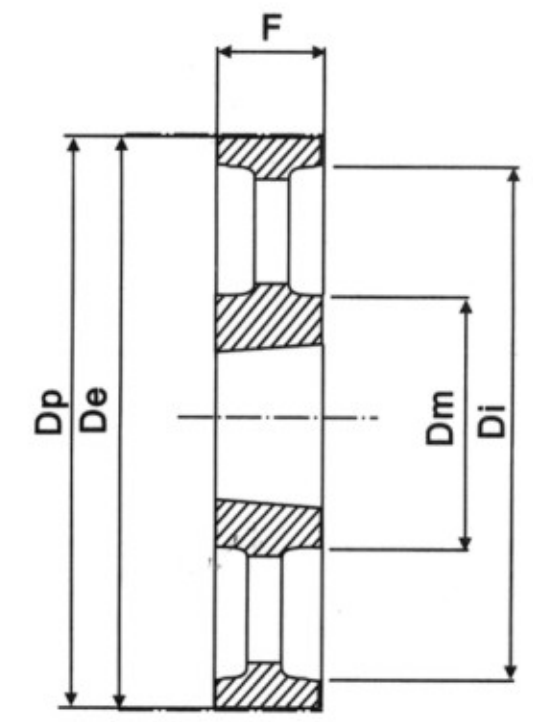

HYPE 型式 9

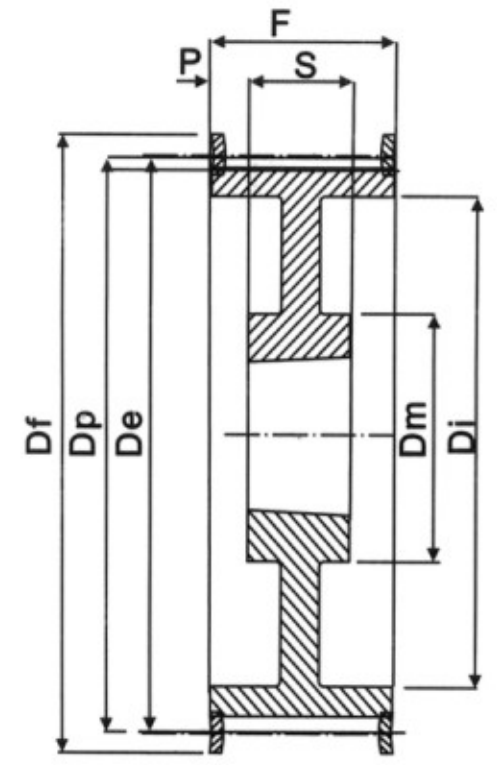

HYPE 型式 10F

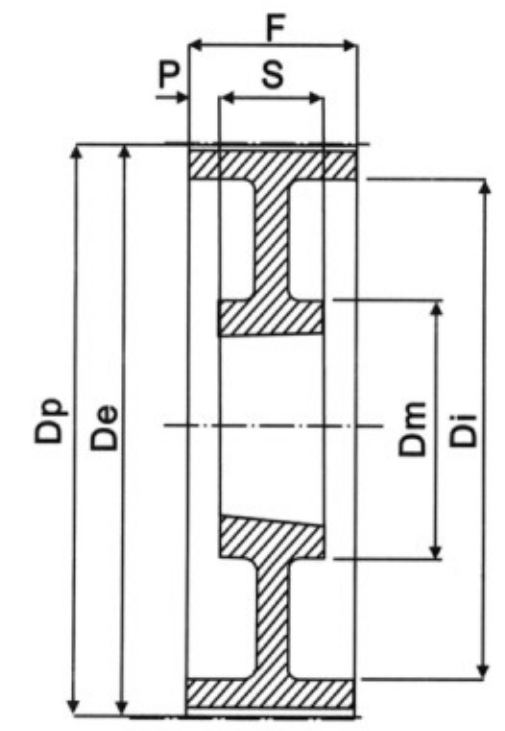

HYPE 型式 11

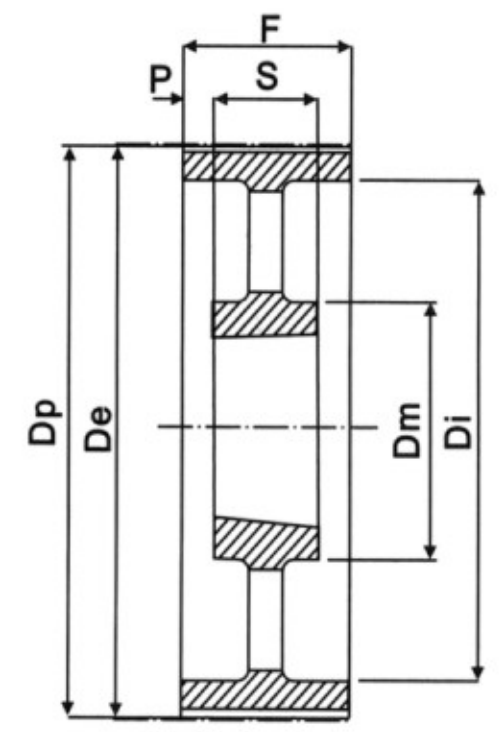

HYPE 型式 12

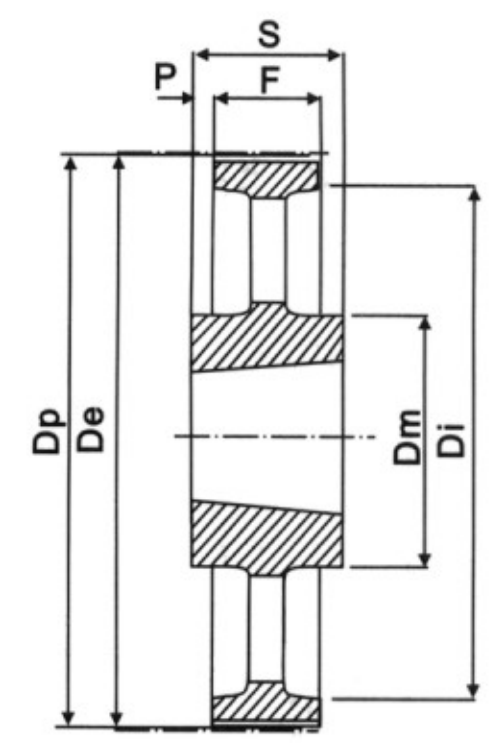

HYPE 型式 13

SILVERTECH 銀科工業

HTD 錐孔高品質同步帶輪
HTD TAPER BORED HIGH QUALITY TIMING BELT PULLEYS

HTD 5M–15

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 34-5M-15	1F	34	1008	54.11	52.97	57	-	-	22	22	-
		TL 36-5M-15	1F	36	1108	57.30	56.15	60	-	-	22	22	-
		TL 38-5M-15	1F	38	1108	60.48	59.34	66.5	-	-	22	22	-
		TL 40-5M-15	1F	40	1108	63.66	62.52	71	-	-	22	22	-
		TL 44-5M-15	1F	44	1108	70.03	68.89	75	-	-	22	22	-
		TL 48-5M-15	5F	48	1210	76.39	75.25	83	59	-	22	25	3
		TL 56-5M-15	5F	56	1210	89.13	87.39	93	70	-	22	25	3
		TL64-5M-15	5F	64	1210	101.86	100.72	106	80	-	22	25	3
	WITHOUT FLANGE 無擋圈	TL 72-5M-15	5	72	1610	114.59	113.45	-	92	-	22	25	3
		TL 80-5M-15	5	80	1610	127.32	126.18	-	92	-	22	25	3
		TL 90-5M-15	5	90	1610	143.24	142.10	-	92	-	22	25	3
		TL 112-5M-15	5	112	2012	178.25	177.11	-	110	-	20	32	12
		TL 136-5M-15	13	136	2012	216.45	215.31	-	110	199	20	32	6

HTD 8M–20

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 22-8M-20	2F	22	1008	56.02	54.65	60 66	-	37	28	22	6
		TL 24-8M-20	2F	24	1108	61.12	59.75	70 75	-	44	28	22	6
		TL 26-8M-20	2F	26	1108	66.21	64.85	82.5	-	45	28	22	6
		TL 28-8M-20	2F	28	1108	71.30	70.08	87 91	-	50	28	22	6
		TL 30-8M-20	2F	30	1108	76.39	75.13	97	-	58	28	22	6
		TL 32-8M-20	2F	32	1610	81.49	80.16	102	-	63	28	22	3
		TL 34-8M-20	2F	34	1610	86.58	85.22	106	-	64	28	25	3
		TL 36-8M-20	2F	36	1610	91.67	90.30	120	-	68	28	25	3
		TL 38-8M-20	2F	38	1610	96.77	95.39	128	-	72	28	25	3
		TL 40-8M-20	2F	40	1610	101.86	100.49	150	-	76	28	25	3
		TL 44-8M-20	5F	44	2012	112.05	110.67	168	92	-	28	25	4
		TL 48-8M-20	5F	48	2012	122.23	120.86	192	96	-	28	32	4
		TL 56-8M-20	5F	56	2012	142.60	141.23	-	110	-	28	32	4
		TL 64-8M-20	6F	64	2012	162.97	161.60	-	110	137	28	32	4
		TL 72-8M-20	6F	72	2012	183.35	181.97	-	110	158	28	32	4
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	TL 80-8M-20	7	80	2012	203.72	202.35	-	110	180	28	32	4
		TL 90-8M-20	7	90	2012	229.18	227.81	-	110	204	28	32	4
		TL 144-8M-20	13	144	2517	366.69	365.32	-	125	336	28	45	-

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理**.

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS

HTD 8M-30

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 22-8M-30	2F	22	1008	56.02	54.65	60	-	37	38	22	16
		TL 24-8M-30	2F	24	1108	61.12	59.75	66	-	44	38	22	16
		TL 26-8M-30	2F	26	1108	66.21	64.85	70	-	44	38	22	16
		TL 28-8M-30	2F	28	1210	71.30	70.08	75	-	50	38	25	13
		TL 30-8M-30	1F	30	1615	76.39	75.13	83	-	-	38	38	-
		TL 32-8M-30	1F	32	1615	81.49	80.16	87	-	-	38	38	-
		TL 34-8M-30	1F	34	1615	86.58	85.22	91	-	-	38	38	-
		TL 36-8M-30	1F	36	1615	91.67	90.30	97	-	-	38	38	-
		TL 38-8M-30	1F	38	1615	96.77	95.39	102	-	-	38	38	-
		TL 40-8M-30	1F	40	1615	101.86	100.49	106	-	-	38	38	-
		TL 44-8M-30	2F	44	2012	112.05	110.67	120	-	86	38	32	6
		TL 48-8M-30	2F	48	2012	122.23	120.86	128	-	90	38	32	6
		TL 56-8M-30	2F	56	2012	142.60	141.23	150	-	110	38	32	6
		TL 64-8M-30	5F	64	2517	162.97	161.60	168	125	-	38	45	7
		TL 72-8M-30	6F	72	2517	183.35	181.97	192	125	158	38	45	7
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	TL 80-8M-30	7	80	2517	203.72	202.35	-	125	180	38	45	7
		TL 90-8M-30	7	90	2517	229.18	227.81	-	125	204	38	45	7
		TL 112-8M-30	7	112	2517	285.21	283.83	-	125	254	38	45	7
		TL 144-8M-30	8	144	2517	366.69	365.32	-	125	336	38	45	7

HTD 8M-50

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 28-8M-50	2F	28	1210	71.30	70.08	75	-	50	60	25	35
		TL 30-8M-50	2F	30	1615	76.39	75.13	83	-	58	60	38	22
		TL 32-8M-50	2F	32	1615	81.49	80.16	87	-	63	60	38	22
		TL 34-8M-50	2F	34	1615	86.58	85.22	91	-	65	60	38	22
		TL 36-8M-50	2F	36	1615	91.67	90.30	97	-	68	60	38	22
		TL 38-8M-50	2F	38	1615	96.77	95.39	102	-	72	60	38	22
		TL 40-8M-50	3F	40	2012	101.86	100.49	106	-	80	60	32	14
		TL 44-8M-50	3F	44	2012	112.05	110.67	120	-	86	60	32	14
		TL 48-8M-50	3F	48	2012	122.23	120.86	128	-	95	60	32	14
		TL 56-8M-50	3F	56	2517	142.60	141.23	150	-	116	60	45	7.5
		TL 64-8M-50	3F	64	2517	162.97	161.60	168	-	136	60	45	7.5
		TL 72-8M-50	10F	72	2517	183.35	181.97	192	125	158	60	45	7.5
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	TL 80-8M-50	4	80	3020	203.72	202.35	-	-	180	60	51	4.5
		TL 90-8M-50	11	90	3020	229.18	227.81	-	160	204	60	51	4.5
		TL 112-8M-50	11	112	3020	285.21	283.83	-	170	254	60	51	4.5
		TL 144-8M-50	12	144	3020	366.69	365.32	-	170	336	60	51	4.5
		TL 168-8M-50	13	168	3525	427.81	426.44	-	198	395	60	65	2.5
		TL 192-8M-50	13	192	3525	488.92	487.55	-	198	455	60	65	2.5

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

SILVERTECH 銀科工業

HTD 錐孔高品質同步帶輪
HTD TAPER BORED HIGH QUALITY TIMING BELT PULLEYS

HTD 8M-85

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 34-8M-85	3F	34	1615	86.58	85.22	91	-	65	95	38	28.5
		TL 36-8M-85	3F	36	1615	91.67	90.30	97	-	68	95	38	28.5
		TL 38-8M-85	3F	38	1615	96.77	95.39	102	-	72	95	38	28.5
		TL 40-8M-85	3F	40	2012	101.86	100.49	106	-	80	95	32	31.5
		TL 44-8M-85	3F	44	2012	112.05	110.67	120	-	86	95	32	31.5
		TL 48-8M-85	3F	48	2517	122.23	120.86	128	-	97	95	45	25
		TL 56-8M-85	3F	56	2517	142.60	141.23	150	-	116	95	45	25
		TL 64-8M-85	3F	64	2517	162.97	161.60	168	-	136	95	45	25
		TL 72-8M-85	3F	72	3020	183.35	181.97	192	-	150	95	51	22
CAST IRON 鑄鐵	WITHOUT FLANGE 無擋圈	TL 80-8M-85	4	80	3020	203.72	202.35	-	-	180	95	51	22
		TL 90-8M-85	4	90	3020	229.18	227.81	-	-	204	95	51	22
		TL 112-8M-85	11	112	3020	285.21	283.83	-	170	254	95	51	22
		TL 144-8M-85	11	144	3525	366.69	365.32	-	198	336	95	65	15
		TL 168-8M-85	12	168	3525	427.81	426.44	-	198	395	95	65	15
		TL 192-8M-85	12	192	3525	488.92	487.55	-	198	455	95	65	15

HTD 14M-40

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 28-14M-40	3F	28	2012	124.78	122.12	128	-	94	54	32	11
		TL 29-14M-40	3F	29	2012	129.23	126.57	138	-	98	54	32	11
		TL 30-14M-40	3F	30	2012	133.69	130.99	138	-	98	54	32	11
		TL 32-14M-40	3F	32	2012	142.60	139.88	154	-	108	54	32	11
		TL 34-14M-40	3F	34	2517	151.52	148.79	160	-	110	54	45	4.5
		TL 36-14M-40	3F	36	2517	160.43	157.68	168	-	120	54	45	4.5
		TL 38-14M-40	3F	38	2517	169.34	166.60	183	-	130	54	45	4.5
		TL 40-14M-40	3F	40	2517	178.25	175.49	188	-	138	54	45	4.5
		TL 44-14M-40	3F	44	3020	196.08	193.28	211	-	155	54	51	1.5
		TL 48-14M-40	3F	48	3020	213.90	211.11	226	-	170	54	51	1.5
		TL 56-14M-40	3F	56	3020	249.55	246.76	256	-	208	54	51	1.5
CAST IRON 鑄鐵		TL 64-14M-40	10F	64	3020	285.21	282.41	296	170	240	54	51	1.5
	WITHOUT FLANGE 無擋圈	TL 72-14M-40	11	72	3020	320.86	318.06	-	170	280	54	51	1.5
		TL 80-14M-40	12	80	3020	356.51	353.51	-	170	315	54	51	1.5
		TL 90-14M-40	12	90	3020	401.07	398.28	-	170	360	54	51	1.5
		TL 112-14M-40	12	112	3020	499.11	496.32	-	170	456	54	51	1.5
		TL 144-14M-40	12	144	3020	641.71	638.92	-	170	600	54	51	1.5
		TL 168-14M-40	12	168	3020	748.66	745.87	-	170	706	54	51	1.5
		TL 192-14M-40	12	192	3020	855.62	852.82	-	170	813	54	51	1.5
		TL 216-14M-40	12	216	3020	962.57	959.76	-	170	920	54	51	1.5

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

HTD 高品質同步帶輪
HTD HIGH QUALITY TIMING BELT PULLEYS

HTD 14M-55

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 28-14M-55	3F	28	2012	124.78	122.12	128	-	94	70	32	19
		TL 29-14M-55	3F	29	2012	129.23	126.57	138	-	100	70	32	19
		TL 30-14M-55	3F	30	2517	133.69	130.99	138	-	100	70	45	12.5
		TL 32-14M-55	3F	32	2517	142.60	139.88	154	-	108	70	45	12.5
		TL 34-14M-55	3F	34	2517	151.52	148.79	160	-	110	70	45	12.5
		TL 36-14M-55	3F	36	2517	160.43	157.68	168	-	120	70	45	12.5
		TL 38-14M-55	3F	38	2517	169.34	166.60	183	-	130	70	45	12.5
		TL 40-14M-55	3F	40	2517	178.25	175.49	188	-	138	70	45	12.5
		TL 44-14M-55	3F	44	3020	196.08	193.28	211	-	155	70	51	9.5
		TL 48-14M-55	3F	48	3020	213.90	211.11	226	-	170	70	51	9.5
		TL 56-14M-55	3F	56	3020	249.55	246.76	256	-	208	70	51	9.5
CAST IRON 鑄鐵		TL 64-14M-55	10F	64	3020	285.21	282.41	296	170	240	70	51	9.5
	WITHOUT FLANGE 無擋圈	TL 72-14M-55	11	72	3020	320.86	318.06	-	170	280	70	51	9.5
		TL 80-14M-55	12	80	3020	356.51	353.51	-	170	315	70	51	9.5
		TL 90-14M-55	12	90	3020	401.07	398.28	-	170	360	70	51	9.5
		TL 112-14M-55	12	112	3020	499.11	496.32	-	170	456	70	51	9.5
		TL 144-14M-55	12	144	3020	641.71	638.92	-	170	600	70	51	9.5
		TL 168-14M-55	12	168	3020	748.66	745.87	-	170	706	70	51	9.5
		TL 192-14M-55	12	192	3020	855.62	852.82	-	170	813	70	51	9.5
		TL 216-14M-55	13	216	3535	962.57	959.76	-	170	920	70	89	9.5

HTD 14M-85

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 28-14M-85	3F	28	2517	124.78	122.12	128	-	98	102	45	28.5
		TL 29-14M-85	3F	29	2517	129.23	126.57	138	-	100	102	45	28.5
		TL 30-14M-85	3F	30	2517	133.69	130.99	138	-	100	102	45	28.5
		TL 32-14M-85	3F	32	2517	142.60	139.88	154	-	108	102	45	28.5
		TL 34-14M-85	3F	34	2517	151.52	148.79	160	-	110	102	45	28.5
		TL 36-14M-85	3F	36	3020	160.43	157.68	168	-	125	102	45	25.5
		TL 38-14M-85	3F	38	3020	169.34	166.60	183	-	130	102	51	25.5
		TL 40-14M-85	3F	40	3020	178.25	175.49	188	-	138	102	51	25.5
		TL 44-14M-85	3F	44	3020	196.08	193.28	211	-	153	102	51	25.5
		TL 48-14M-85	3F	48	3020	213.90	211.11	226	-	171	102	51	25.5
		TL 56-14M-85	3F	56	3525	249.55	246.76	256	-	210	102	65	18.5
CAST IRON 鑄鐵		TL 64-14M-85	10F	64	3525	285.21	282.41	296	190	240	102	65	18.5
	WITHOUT FLANGE 無擋圈	TL 72-14M-85	11	72	3525	320.86	318.06	-	190	280	102	65	18.5
		TL 80-14M-85	12	80	3525	356.51	353.51	-	190	315	102	65	18.5
		TL 90-14M-85	12	90	3525	401.07	398.28	-	190	360	102	65	18.5
		TL 112-14M-85	12	112	3525	499.11	496.32	-	190	457	102	65	18.5
		TL 144-14M-85	12	144	3525	641.71	638.92	-	190	600	102	65	18.5
		TL 168-14M-85	12	168	3525	748.66	745.87	-	190	706	102	65	18.5
		TL 192-14M-85	9	192	4040	855.62	852.82	-	230	813	102	102	-
		TL 216-14M-85	9	216	4040	962.57	959.76	-	230	920	102	102	-

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

HTD 錐孔高品質同步帶輪
HTD TAPER BORED HIGH QUALITY TIMING BELT PULLEYS

HTD 14M-115

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 28-14M-115	3F	28	2517	124.78	122.12	128	-	98	133	45	44
		TL 29-14M-115	3F	29	2517	129.23	126.57	138	-	100	133	45	44
		TL 30-14M-115	3F	30	2517	133.69	130.99	138	-	100	133	45	44
		TL 32-14M-115	3F	32	2517	142.60	139.88	154	-	108	133	45	44
		TL 34-14M-115	3F	34	2517	151.52	148.79	160	-	110	133	45	44
		TL 36-14M-115	3F	36	3020	160.43	157.68	168	-	125	133	51	41
		TL 38-14M-115	3F	38	3020	169.34	166.60	183	-	130	133	51	41
		TL 40-14M-115	3F	40	3020	178.25	175.49	188	-	138	133	51	41
		TL 44-14M-115	3F	44	3020	196.08	193.28	211	-	155	133	76	28.5
		TL 48-14M-115	3F	48	3020	213.90	211.11	226	-	170	133	76	28.5
		TL 56-14M-115	3F	56	3535	249.55	246.76	256	-	210	133	89	22
CAST IRON 鑄鐵		TL 64-14M-115	10F	64	3535	285.21	282.41	296	190	240	133	89	22
	WITHOUT FLANGE 無擋圈	TL 72-14M-115	11	72	3535	320.86	318.06	-	190	280	133	89	22
		TL 80-14M-115	12	80	3535	356.51	353.71	-	190	315	133	89	22
		TL 90-14M-115	12	90	3535	401.07	398.28	-	190	360	133	89	22
		TL 112-14M-115	12	112	3535	499.11	496.32	-	190	457	133	89	22
		TL 144-14M-115	12	144	4040	641.71	638.92	-	230	600	133	102	15.5
		TL 168-14M-115	12	168	4040	748.66	745.87	-	230	706	133	102	15.5
		TL 192-14M-115	12	192	4040	855.62	852.82	-	230	813	133	102	15.5
		TL 216-14M-115	12	216	4040	962.57	959.76	-	230	920	133	102	15.5

HTD 14M-170

材料/結構 FEATURES		貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	錐號 BUSH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	Di	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
C45 STEEL 鋼	WITH FLANGE 有擋圈	TL 38-14M-170	3F	38	3030	169.34	166.60	183	-	130	187	76	55.5
		TL 40-14M-170	3F	40	3030	178.25	175.49	188	-	138	187	76	55.5
		TL 44-14M-170	3F	44	3535	196.08	193.28	211	-	153	187	89	49
		TL 48-14M-170	3F	48	3535	213.90	211.11	226	-	171	187	89	49
		TL 56-14M-170	3F	56	3535	249.55	246.76	256	-	210	187	89	49
CAST IRON 鑄鐵		TL 64-14M-170	3F	64	4040	285.21	282.41	296	-	240	187	102	42.5
	WITHOUT FLANGE 無擋圈	TL 72-14M-170	11	72	4040	320.86	318.06	-	230	280	187	102	42.5
		TL 80-14M-170	11	80	4040	356.51	353.71	-	230	315	187	102	42.5
		TL 90-14M-170	12	90	4040	401.07	398.28	-	230	360	187	102	42.5
		TL 112-14M-170	12	112	5050	499.11	496.32	-	265	457	187	127	30
		TL 144-14M-170	12	144	5050	641.71	638.92	-	265	600	187	127	30
		TL 168-14M-170	12	168	5050	748.66	745.87	-	265	706	187	127	30
		TL 192-14M-170	12	192	5050	855.62	852.82	-	265	813	187	127	30
		TL 216-14M-170	12	216	5050	962.57	959.76	-	265	920	187	127	30

PHOSPHATED FINISHING FOR ALL MADE OF STEEL OR CAST IRON.
所有鋼或鑄鐵制的均含**磷化處理.**

"T" 型高品質同步帶輪
"T" HIGH QUALITY TIMING BELT PULLEYS

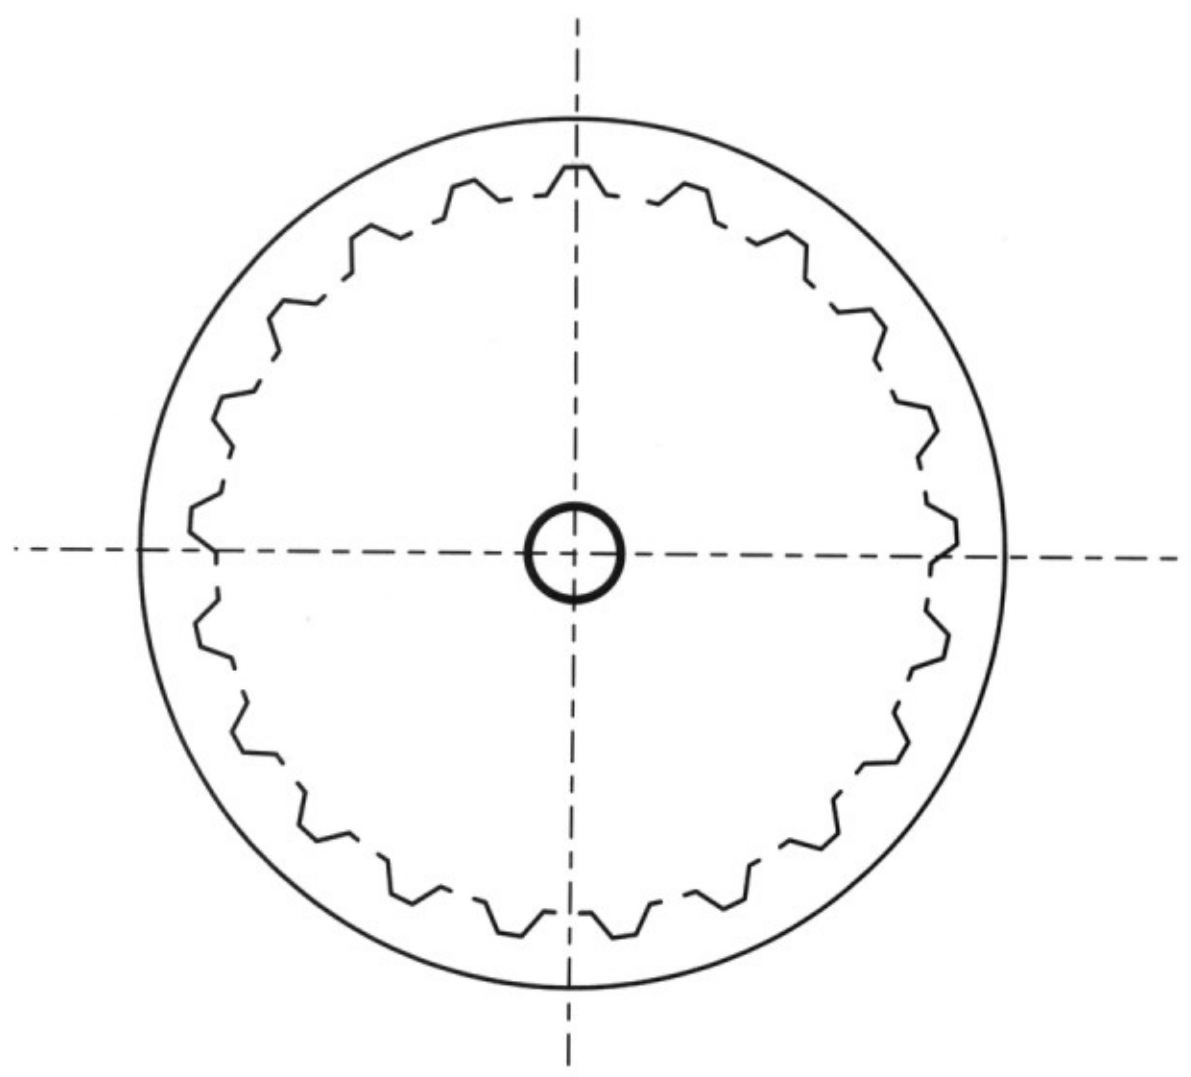

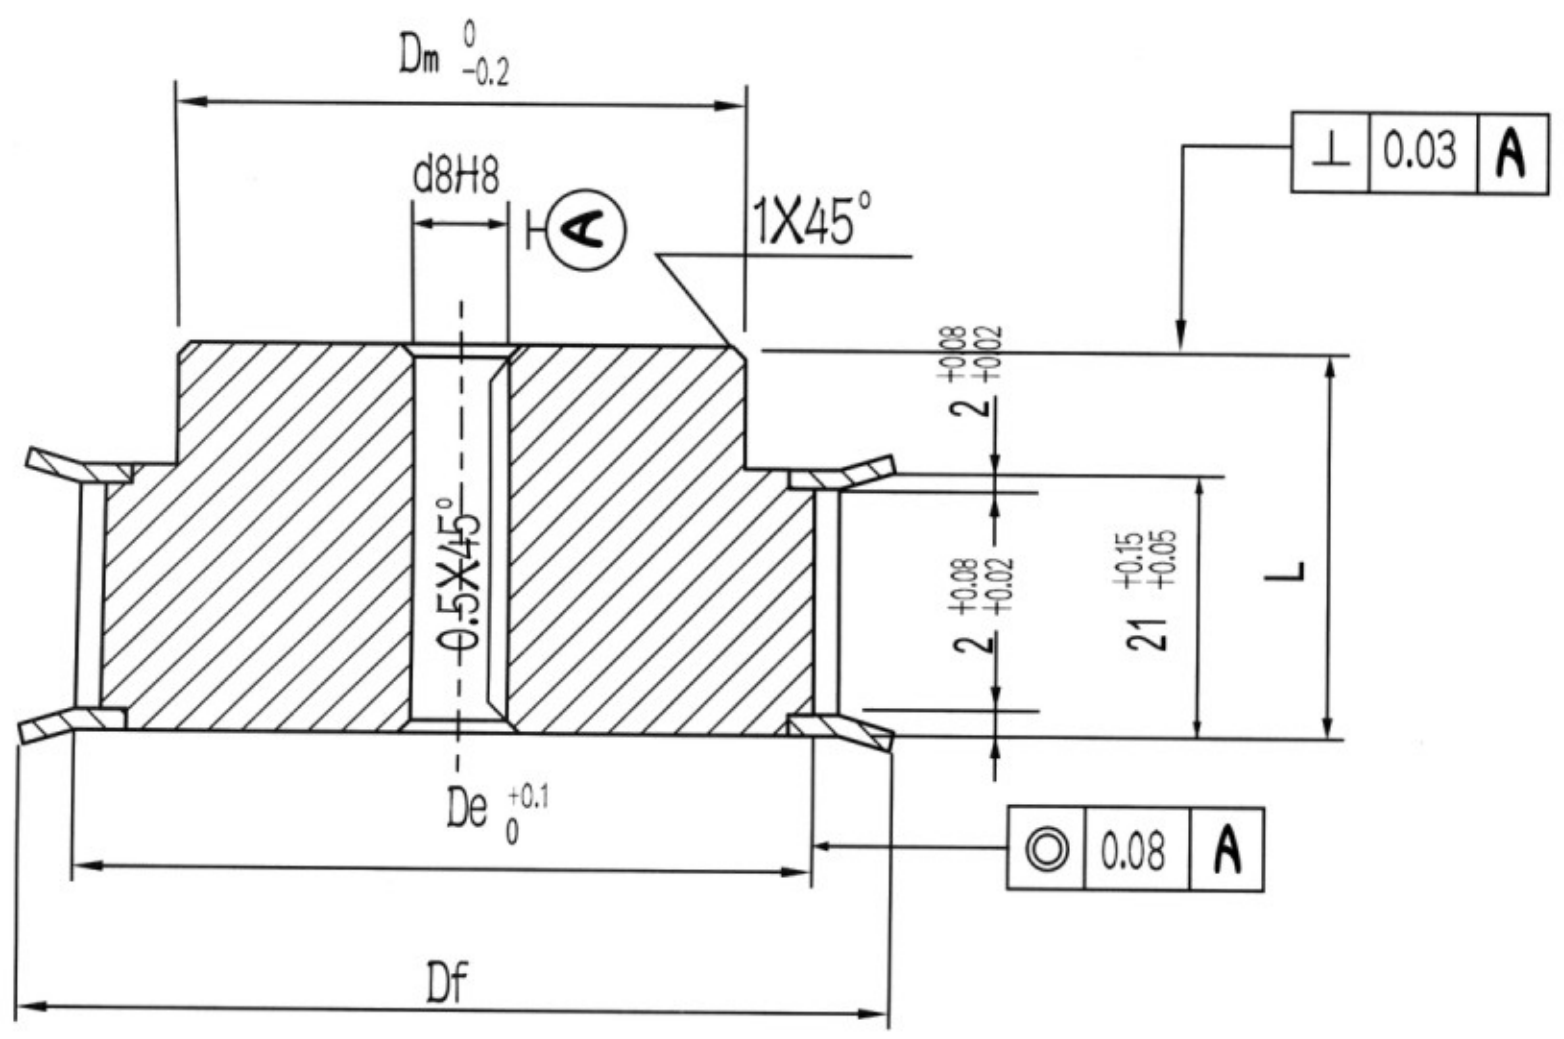

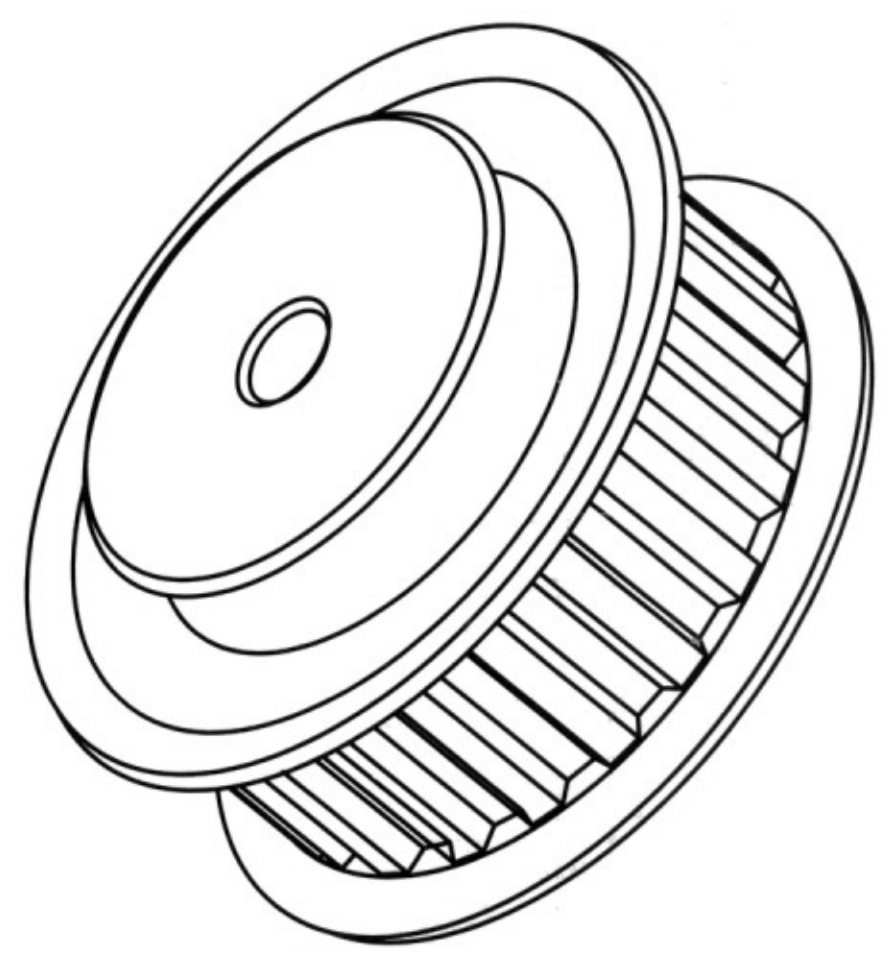

SILVERTECH 銀科工業

"T" 型高品質同步帶輪
"T" HIGH QUALITY TIMING BELT PULLEYS

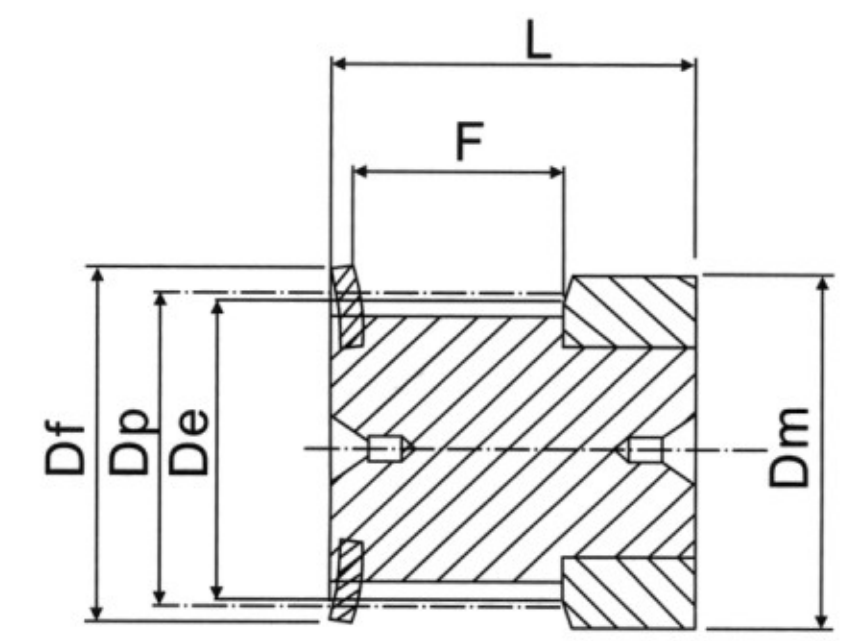

TYPE 型式 0F

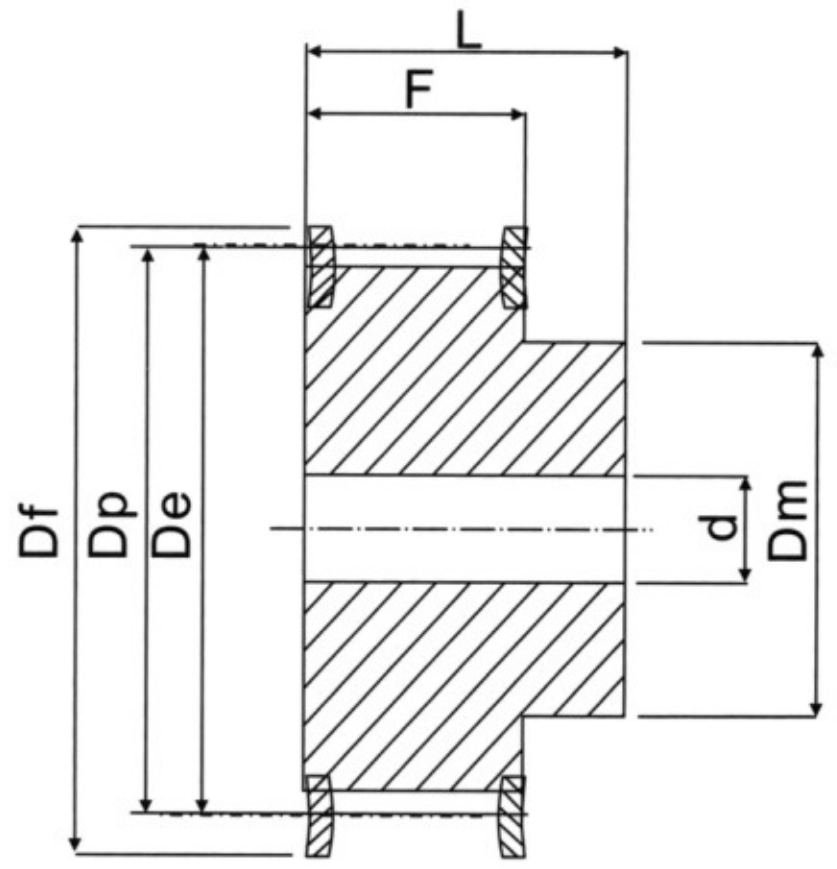

TYPE 型式 1F

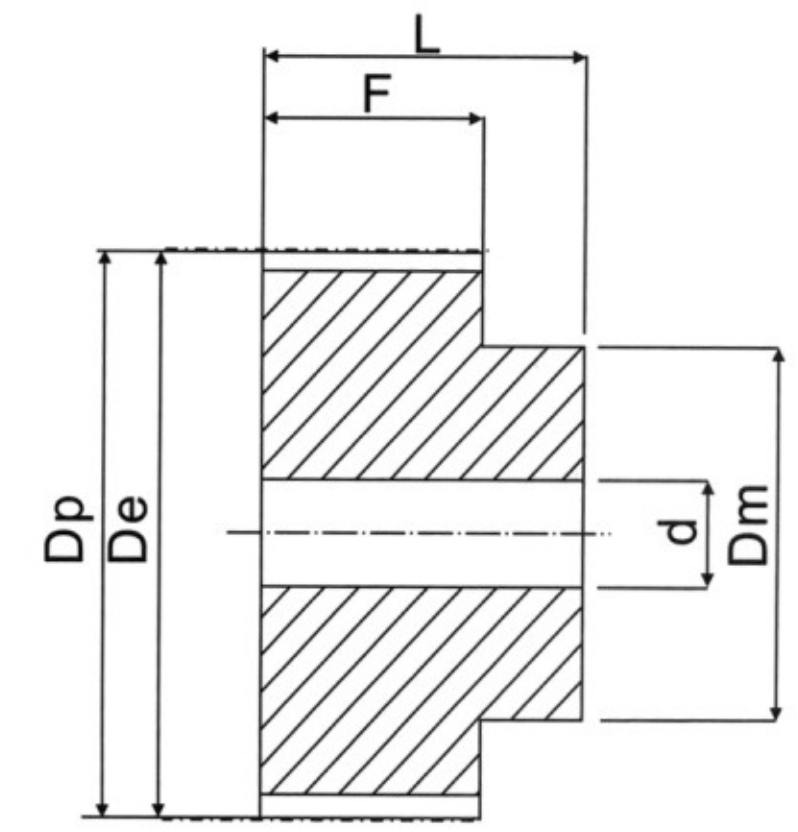

TYPE 型式 2

T 050 PITCH 節距 2.5mm FOR BELT WIDTH 帶寬 6mm

	貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	16 T2.5 12	0F	12	9.60	9.00	13.0	13	9	16	-
	16 T2.5 14	0F	14	11.20	10.60	15.0	15	9	16	-
	16 T2.5 15	0F	15	12.00	11.40	15.0	15	9	16	-
	16 T2.5 16	0F	16	12.80	12.20	16.0	16	9	16	-
	16 T2.5 18	1F	18	14.40	13.80	17.5	10	10	16	-
	16 T2.5 19	1F	19	15.20	14.60	20.0	10	10	16	-
	16 T2.5 20	1F	20	16.00	15.40	20.0	11	10	16	-
	16 T2.5 22	1F	22	17.60	17.00	22.0	11	10	16	-
	16 T2.5 24	1F	24	19.15	18.55	22.0	12	10	16	4
	16 T2.5 25	1F	25	19.95	19.35	25.0	13	10	16	4
	16 T2.5 26	1F	26	20.75	20.15	26.0	14	10	16	4
	16 T2.5 28	1F	28	22.35	21.75	26.0	14	10	16	4
	16 T2.5 30	1F	30	23.95	23.35	26.0	16	10	16	6
	16 T2.5 32	1F	32	25.55	24.95	32.0	16	10	16	6
	16 T2.5 36	1F	36	28.75	28.10	36.0	20	10	16	6
	16 T2.5 40	1F	40	31.90	31.30	38.0	22	10	16	6
	16 T2.5 44	2	44	35.10	34.50	-	24	10	16	6
	16 T2.5 48	2	48	38.30	37.70	-	26	10	16	6
	16 T2.5 60	2	60	47.85	47.25	-	34	10	16	6

"T" 型高品質同步帶輪

"T" HIGH QUALITY TIMING BELT PULLEYS

T 5 PITCH 節距 5mm FOR BELT WIDTH 帶寬 10mm

ALUMINIUM 鋁

貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	内孔 BORE d
21 T5 10	1F	10	16.05	15.05	19.5	8	15	21	-
21 T5 12	1F	12	19.25	18.25	23.0	11	15	21	-
21 T5 14	1F	14	22.45	21.45	25.0	13	15	21	-
21 T5 15	1F	15	24.05	23.05	28.0	16	15	21	6
21 T5 16	1F	16	25.06	24.60	32.0	18	15	21	6
21 T5 18	1F	18	28.08	27.80	32.0	20	15	21	6
21 T5 19	1F	19	30.40	29.40	36.0	22	15	21	6
21 T5 20	1F	20	32.00	31.00	36.0	23	15	21	6
21 T5 22	1F	22	35.15	34.15	38.0	24	15	21	6
21 T5 24	1F	24	38.40	37.40	42.0	26	15	21	6
21 T5 25	1F	25	39.95	38.95	44.0	26	15	21	6
21 T5 26	1F	26	41.60	40.60	44.0	26	15	21	6
21 T5 27	1F	27	43.20	42.20	48.0	30	15	21	8
21 T5 28	1F	28	44.75	43.75	48.0	32	15	21	8
21 T5 30	1F	30	47.95	46.95	51.0	34	15	21	8
21 T5 32	1F	32	51.10	50.10	54.0	38	15	21	8
21 T5 36	1F	36	57.45	56.45	64.0	38	15	21	8
21 T5 40	1F	40	63.85	62.85	66.5	40	15	21	8
21 T5 42	1F	42	67.00	66.00	70.0	40	15	21	8
21 T5 44	2	44	70.20	69.20	-	45	15	21	8
21 T5 48	2	48	76.55	75.55	-	50	15	21	8
21 T5 60	2	60	95.65	94.65	-	65	15	21	8

T 5 PITCH 節距 5mm FOR BELT WIDTH 帶寬 16mm

ALUMINIUM 鋁

貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	内孔 BORE d
27 T5 10	1F	10	16.05	15.05	19.5	8	21	27	-
27 T5 12	1F	12	19.25	18.25	23.0	11	21	27	-
27 T5 14	1F	14	22.45	21.45	25.0	13	21	27	-
27 T5 15	1F	15	24.05	23.05	28.0	16	21	27	6
27 T5 16	1F	16	25.06	24.60	32.0	18	21	27	6
27 T5 18	1F	18	28.08	27.80	32.0	20	21	27	6
27 T5 19	1F	19	30.40	29.40	36.0	22	21	27	6
27 T5 20	1F	20	32.00	31.00	36.0	23	21	27	6
27 T5 22	1F	22	35.15	34.15	38.0	24	21	27	6
27 T5 24	1F	24	38.40	37.40	42.0	26	21	27	6
27 T5 25	1F	25	39.95	38.95	44.0	26	21	27	6
27 T5 26	1F	26	41.60	40.60	44.0	26	21	27	6
27 T5 27	1F	27	43.20	42.20	48.0	30	21	27	8
27 T5 28	1F	28	44.75	43.75	48.0	32	21	27	8
27 T5 30	1F	30	47.95	46.95	51.0	34	21	27	8
27 T5 32	1F	32	51.10	50.10	54.0	38	21	27	8
27 T5 36	1F	36	57.45	56.45	64.0	38	21	27	8
27 T5 40	1F	40	63.85	62.85	66.5	40	21	27	8
27 T5 42	1F	42	67.00	66.00	70.0	40	21	27	8
27 T5 44	2	44	70.20	69.20	-	45	21	27	8
27 T5 48	2	48	76.55	75.55	-	50	21	27	8
27 T5 60	2	60	95.65	94.65	-	65	21	27	8

T 5 PITCH 節距 5mm FOR BELT WIDTH 帶寬 25mm

ALUMINIUM 鋁

貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	内孔 BORE d
36 T5 10	1F	10	16.05	15.05	19.5	8	30	36	-
36 T5 12	1F	12	19.25	18.25	23.0	11	30	36	-
36 T5 14	1F	14	22.45	21.45	25.0	13	30	36	-
36 T5 15	1F	15	24.05	23.05	28.0	16	30	36	6
36 T5 16	1F	16	25.06	24.60	32.0	18	30	36	6
36 T5 18	1F	18	28.08	27.80	32.0	20	30	36	6
36 T5 19	1F	19	30.40	29.40	36.0	22	30	36	6
36 T5 20	1F	20	32.00	31.00	36.0	23	30	36	6
36 T5 22	1F	22	35.15	34.15	38.0	24	30	36	6
36 T5 24	1F	24	38.40	37.40	42.0	26	30	36	8
36 T5 25	1F	25	39.95	38.95	44.0	26	30	36	8
36 T5 26	1F	26	41.60	40.60	44.0	26	30	36	8
36 T5 27	1F	27	43.20	42.20	48.0	30	30	36	8
36 T5 28	1F	28	44.75	43.75	48.0	32	30	36	8
36 T5 30	1F	30	47.95	46.95	51.0	34	30	36	8
36 T5 32	1F	32	51.10	50.10	54.0	38	30	36	8
36 T5 36	1F	36	57.45	56.45	64.0	38	30	36	8
36 T5 40	1F	40	63.85	62.85	66.5	40	30	36	8
36 T5 42	1F	42	67.00	66.00	70.0	40	30	36	8
36 T5 44	2	44	70.20	69.20	-	45	30	36	8
36 T5 48	2	48	76.55	75.55	-	50	30	36	8
36 T5 60	2	60	95.65	94.65	-	65	30	36	8

"T" 型高品質同步帶輪

"T" HIGH QUALITY TIMING BELT PULLEYS

T 10 PITCH 節距 10mm FOR BELT WIDTH 帶寬 16mm

ALUMINIUM 鋁

貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	内孔 BORE d
31 T10 12	1F	12	38.35	36.35	42	28	21	31	6
31 T10 14	1F	14	44.70	42.70	48	32	21	31	8
31 T10 15	1F	15	47.90	45.90	51	32	21	31	8
31 T10 16	1F	16	51.10	49.10	54	35	21	31	8
31 T10 18	1F	18	57.45	55.45	60	40	21	31	8
31 T10 19	1F	19	60.65	58.65	66	44	21	31	8
31 T10 20	1F	20	63.80	61.80	66	46	21	31	8
31 T10 22	1F	22	70.20	68.20	75	52	21	31	8
31 T10 24	1F	24	76.55	74.55	83	58	21	31	8
31 T10 25	1F	25	79.75	77.75	83	60	21	31	8
31 T10 26	1F	26	82.90	80.90	87	60	21	31	8
31 T10 27	1F	27	86.10	84.10	91	60	21	31	8
31 T10 28	1F	28	89.25	87.25	93	60	21	31	8
31 T10 30	1F	30	95.65	93.65	97	60	21	31	8
31 T10 32	1F	32	102.00	100.00	106	65	21	31	10
31 T10 36	1F	36	114.75	112.75	119	70	21	31	10
31 T10 40	1F	40	127.45	125.45	131	80	21	31	10
31 T10 44	2	44	140.20	138.20	-	88	21	31	10
31 T10 48	2	48	152.95	150.95	-	95	21	31	16
31 T10 60	2	60	191.15	189.10	-	110	21	31	16

T 10 PITCH 節距 10mm FOR BELT WIDTH 帶寬 25mm

ALUMINIUM 鋁

貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	内孔 BORE d
40 T10 12	1F	12	38.35	36.35	42	28	30	40	6
40 T10 14	1F	14	44.70	42.70	48	32	30	40	8
40 T10 15	1F	15	47.90	45.90	51	32	30	40	8
40 T10 16	1F	16	51.10	49.10	54	35	30	40	8
40 T10 18	1F	18	57.45	55.45	60	40	30	40	8
40 T10 19	1F	19	60.65	58.65	66	44	30	40	8
40 T10 20	1F	20	63.80	61.80	66	46	30	40	8
40 T10 22	1F	22	70.20	68.20	75	52	30	40	8
40 T10 24	1F	24	76.55	74.55	83	58	30	40	8
40 T10 25	1F	25	79.75	77.75	83	60	30	40	8
40 T10 26	1F	26	82.90	80.90	87	60	30	40	8
40 T10 27	1F	27	86.10	84.10	91	60	30	40	8
40 T10 28	1F	28	89.25	87.25	93	60	30	40	8
40 T10 30	1F	30	95.65	93.65	97	60	30	40	8
40 T10 32	1F	32	102.00	100.00	106	65	30	40	10
40 T10 36	1F	36	114.75	112.75	119	70	30	40	10
40 T10 40	1F	40	127.45	125.45	131	80	30	40	10
40 T10 44	2	44	140.20	138.20	-	88	30	40	10
40 T10 48	2	48	152.95	150.95	-	95	30	40	16
40 T10 60	2	60	191.15	189.15	-	110	30	40	16

"T" 型高品質同步帶輪

"T" HIGH QUALITY TIMING BELT PULLEYS

T 10 PITCH 節距 10mm FOR BELT WIDTH 帶寬 32mm

	貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	47 T10 18	1F	18	57.45	55.45	60	40	37	47	10
	47 T10 19	1F	19	60.65	58.65	66	44	37	47	10
	47 T10 20	1F	20	63.80	61.80	66	46	37	47	12
	47 T10 22	1F	22	70.20	68.20	75	52	37	47	12
	47 T10 24	1F	24	76.55	74.55	83	58	37	47	12
	47 T10 25	1F	25	79.75	77.75	83	60	37	47	12
	47 T10 26	1F	26	82.90	80.90	87	60	37	47	12
	47 T10 27	1F	27	86.10	84.10	91	60	37	47	12
	47 T10 28	1F	28	89.25	87.25	93	60	37	47	12
	47 T10 30	1F	30	95.65	93.65	97	60	37	47	12
	47 T10 32	1F	32	102.00	100.00	106	65	37	47	12
	47 T10 36	1F	36	114.75	112.75	119	70	37	47	16
	47 T10 40	1F	40	127.45	125.45	131	80	37	47	16
	47 T10 44	2	44	140.20	138.20	-	88	37	47	16
	47 T10 48	2	48	152.95	150.95	-	95	37	47	16
	47 T10 60	2	60	191.10	189.10	-	110	37	47	16

T 10 PITCH 節距 10mm FOR BELT WIDTH 帶寬 50mm

	貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	節徑 PITCH DIA Dp	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	66 T10 18	1F	18	57.45	55.45	60	40	56	66	10
	66 T10 19	1F	19	60.65	58.65	66	44	56	66	10
	66 T10 20	1F	20	63.80	61.80	66	46	56	66	12
	66 T10 22	1F	22	70.20	68.20	75	52	56	66	12
	66 T10 24	1F	24	76.55	74.55	83	58	56	66	12
	66 T10 25	1F	25	79.75	77.75	83	60	56	66	12
	66 T10 26	1F	26	82.90	80.90	87	60	56	66	12
	66 T10 27	1F	27	86.10	84.10	91	60	56	66	12
	66 T10 28	1F	28	89.25	87.25	93	60	56	66	12
	66 T10 30	1F	30	95.65	93.65	97	60	56	66	12
	66 T10 32	1F	32	102.00	100.00	106	65	56	66	12
	66 T10 36	1F	36	114.75	112.75	119	70	56	66	16
	66 T10 40	1F	40	127.45	125.45	131	80	56	66	16
	66 T10 44	2	44	140.20	138.20	-	88	56	66	16
	66 T10 48	2	48	152.95	150.95	-	95	56	66	16
	66 T10 60	2	60	191.10	189.10	-	110	56	66	16

高品質"T" 型棒

HIGH QUALITY "T" TIMING BARS

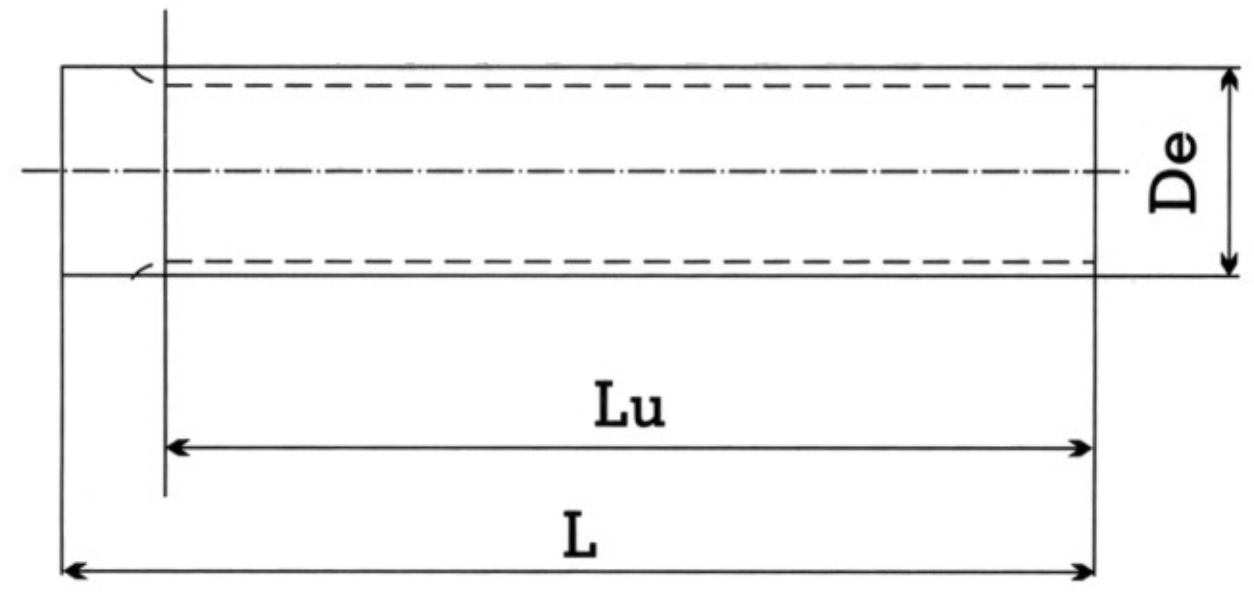

T 2.5 PITCH 節距 2.5mm

貨號 MODEL NO.	齒數 TEETH NO.	外徑 De	Lu	L
T2.5-10	10	7.42	50	75
T2.5-12	12	9.00	50	75
T2.5-13	13	9.80	50	75
T2.5-14	14	10.60	50	75
T2.5-15	15	11.40	50	75
T2.5-16	16	12.20	50	75
T2.5-17	17	13.00	50	75
T2.5-18	18	13.80	50	75
T2.5-19	19	14.60	90	120
T2.5-20	20	15.40	90	120
T2.5-21	21	16.20	90	120
T2.5-22	22	17.00	125	140
T2.5-24	24	18.55	125	140
T2.5-26	26	20.15	125	140
T2.5-27	27	20.95	125	140
T2.5-28	28	21.75	125	140
T2.5-29	29	22.55	125	140
T2.5-30	30	23.35	125	140
T2.5-32	32	24.95	125	140
T2.5-34	34	26.55	125	140
T2.5-35	35	27.35	132	140
T2.5-36	36	28.10	132	140
T2.5-38	38	29.70	140	140
T2.5-40	40	31.30	140	140
T2.5-42	42	32.90	140	140
T2.5-44	44	34.50	140	140
T2.5-45	45	35.30	140	140
T2.5-48	48	37.70	140	140
T2.5-50	50	39.29	160	160
T2.5-60	60	47.25	160	160
T2.5-65	65	51.20	160	160
T2.5-70	70	55.20	160	160
T2.5-72	72	56.80	160	160
T2.5-90	90	71.12	160	160
T2.5-100	100	79.08	160	160

T 5 PITCH 節距 5mm

貨號 MODEL NO.	齒數 TEETH NO.	外徑 De	Lu	L
T5-10	10	15.05	125	140
T5-11	11	16.65	125	140
T5-12	12	18.25	125	140
T5-13	13	19.85	125	140
T5-14	14	21.45	140	140
T5-15	15	23.05	140	140
T5-16	16	24.60	140	140
T5-17	14	26.20	140	140
T5-18	18	27.80	140	140
T5-19	19	29.40	140	140
T5-20	20	31.00	160	160
T5-21	21	32.70	160	160
T5-22	22	34.15	160	160
T5-23	23	35.85	160	160
T5-24	24	37.40	160	160
T5-25	25	38.95	160	160
T5-26	26	40.60	160	160
T5-27	27	42.20	160	160
T5-28	28	43.75	160	160
T5-29	29	45.35	160	160
T5-30	30	46.95	160	160
T5-32	32	50.10	160	160
T5-34	34	53.25	160	160
T5-35	35	54.85	160	160
T5-36	36	56.45	160	160
T5-37	37	58.06	160	160
T5-38	38	59.65	160	160
T5-40	40	62.85	160	160
T5-42	42	66.00	160	160
T5-44	44	69.20	160	160
T5-45	45	70.80	160	160
T5-46	46	72.40	160	160
T5-48	48	75.55	160	160
T5-50	50	78.75	160	160
T5-60	60	94.65	160	160
T5-72	72	113.75	160	160
T5-80	80	126.48	160	160
T5-90	90	142.40	160	160
T5-100	100	158.31	160	160

T 10 PITCH 節距 10mm

貨號 MODEL NO.	齒數 TEETH NO.	外徑 De	Lu	L
T10-10	10	29.98	140	140
T10-11	11	33.16	140	140
T10-12	12	36.35	140	140
T10-13	13	39.55	140	140
T10-14	14	42.70	160	160
T10-15	15	45.90	160	160
T10-16	16	49.10	160	160
T10-17	17	52.25	160	160
T10-18	18	55.45	160	160
T10-19	19	58.65	160	160
T10-20	20	61.80	160	160
T10-21	21	65.00	160	160
T10-22	22	68.15	160	160
T10-23	23	71.35	160	160
T10-24	24	74.55	160	160
T10-26	26	80.90	160	160
T10-28	28	87.25	160	160
T10-30	30	93.65	160	160
T10-32	32	100.00	160	160
T10-34	34	106.40	160	160
T10-36	36	112.75	160	160
T10-38	38	119.10	160	160
T10-40	40	125.45	160	160
T10-45	45	141.40	160	160
T10-48	48	150.95	160	160
T10-60	60	189.15	160	160
T10-72	72	227.29	160	160

ALL ABOVE BARS ARE MADE OF ALUMINIUN.

以上所有同步棒用鋁制造.

"AT" 型高品質同步帶輪
"AT" HIGH QUALITY TIMING BELT PULLEYS

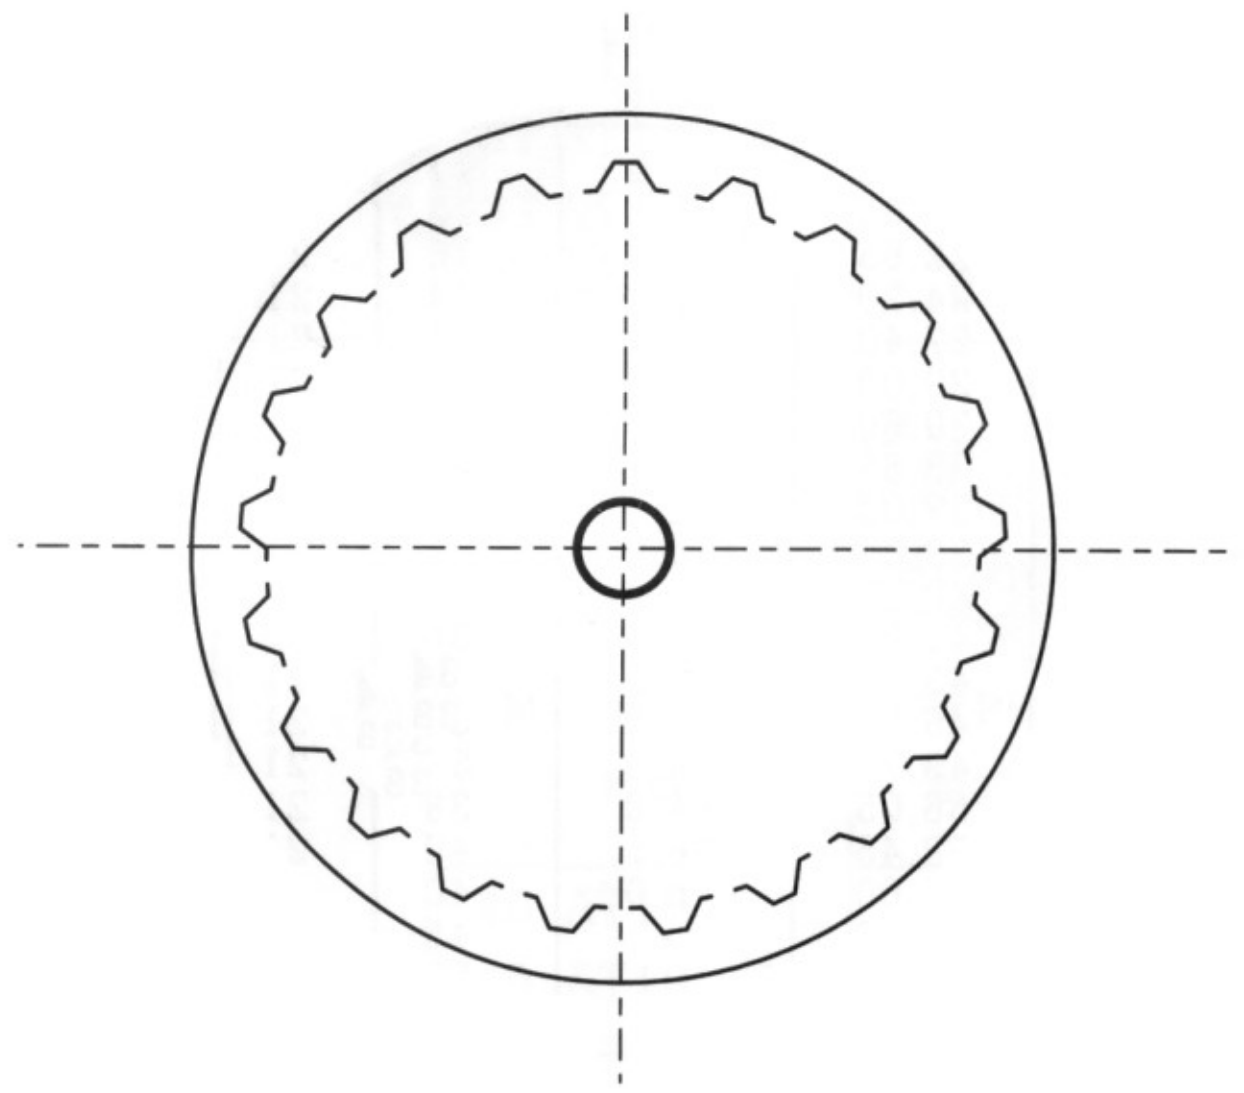

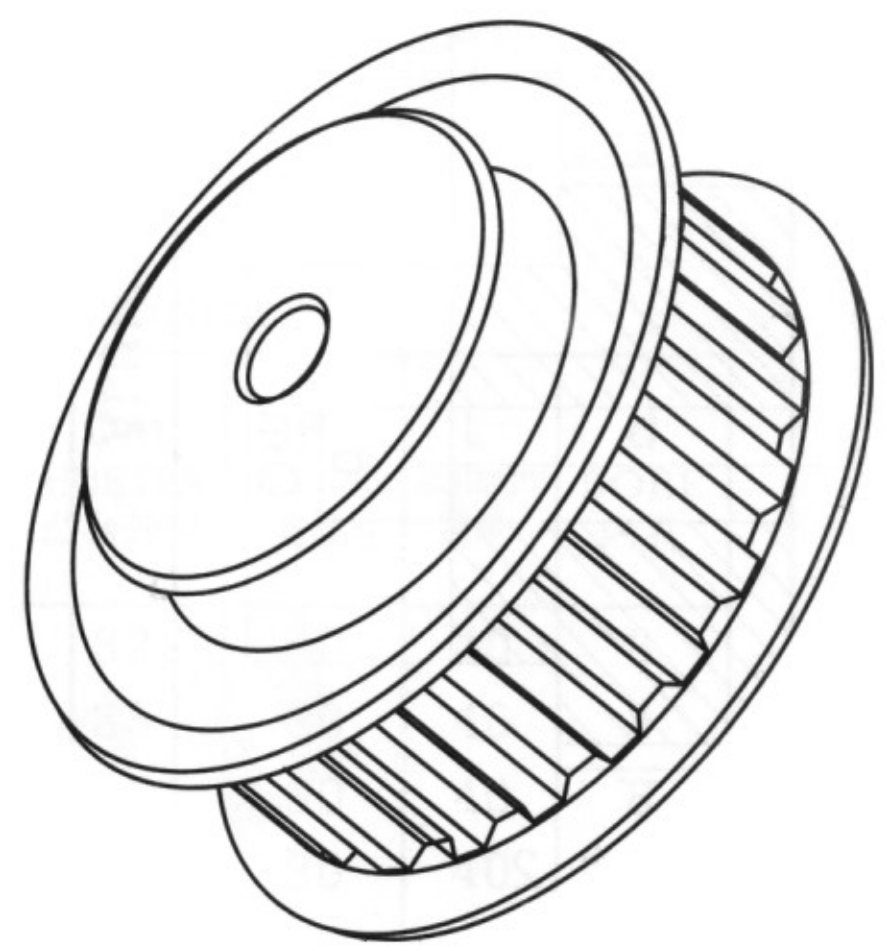

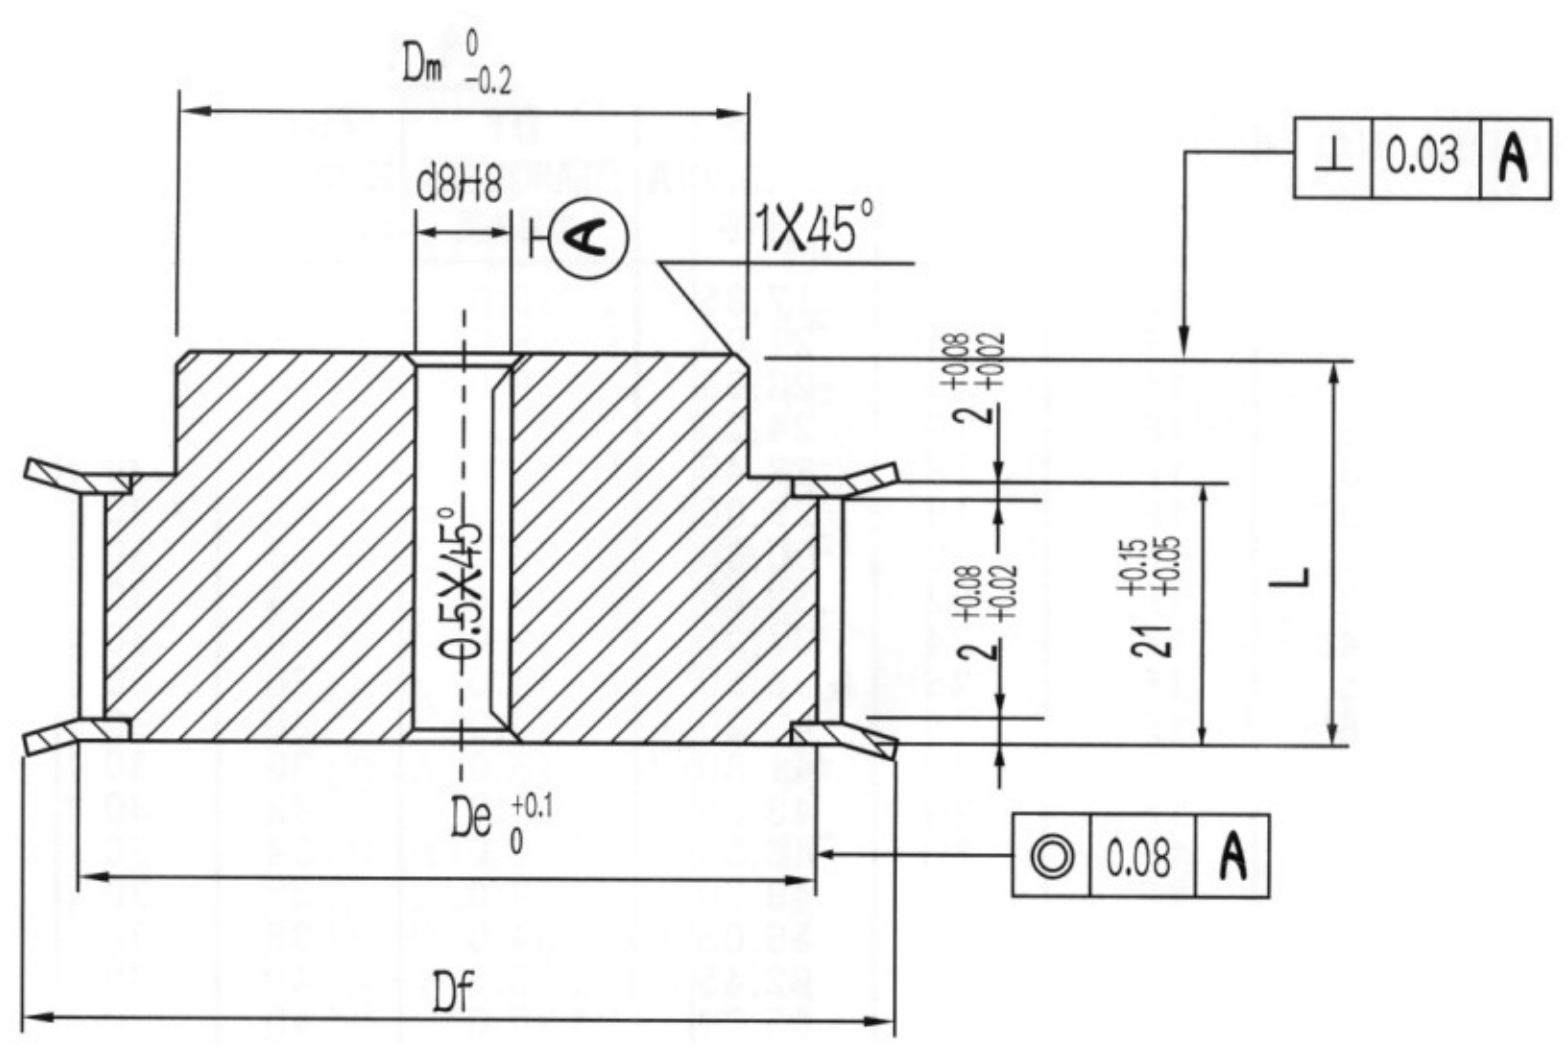

SILVERTECH 銀科工業

"AT" 型高品質同步帶輪
"AT" HIGH QUALITY TIMING BELT PULLEYS

AT 5 PITCH 節距 5mm FOR BELT WIDTH 帶寬 10mm

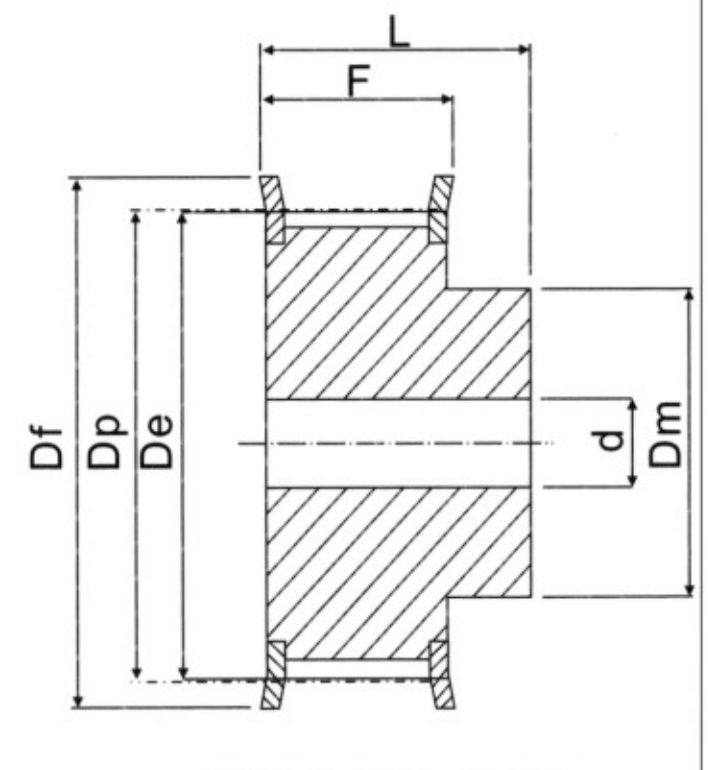

TYPE 型式 1F

	貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	21 AT5 12	1F	12		23.0	11	15	21	-
	21 AT5 14	1F	14		25.0	13	15	21	-
	21 AT5 15	1F	15		28.0	16	15	21	-
	21 AT5 16	1F	16		32.0	18	15	21	6
	21 AT5 18	1F	18		32.0	20	15	21	6
	21 AT5 19	1F	19		36.0	22	15	21	6
	21 AT5 20	1F	20		36.0	23	15	21	6
	21 AT5 22	1F	22		38.0	24	15	21	6
	21 AT5 24	1F	24		42.0	26	15	21	6
	21 AT5 25	1F	25		44.0	26	15	21	6
	21 AT5 26	1F	26		44.0	26	15	21	6
	21 AT5 27	1F	27		48.0	30	15	21	6
	21 AT5 28	1F	28		48.0	32	15	21	8
	21 AT5 30	1F	30		51.0	34	15	21	8
	21 AT5 32	1F	32		54.0	38	15	21	8
	21 AT5 36	1F	36		64.0	38	15	21	8
	21 AT5 40	1F	40		66.5	40	15	21	8
	21 AT5 42	1F	42		70.0	40	15	21	8
	21 AT5 44	2	44		-	45	15	21	8
	21 AT5 48	2	48		-	50	15	21	8
	21 AT5 60	2	60		-	65	15	21	8

AT 5 PITCH 節距 5mm FOR BELT WIDTH 帶寬 16mm

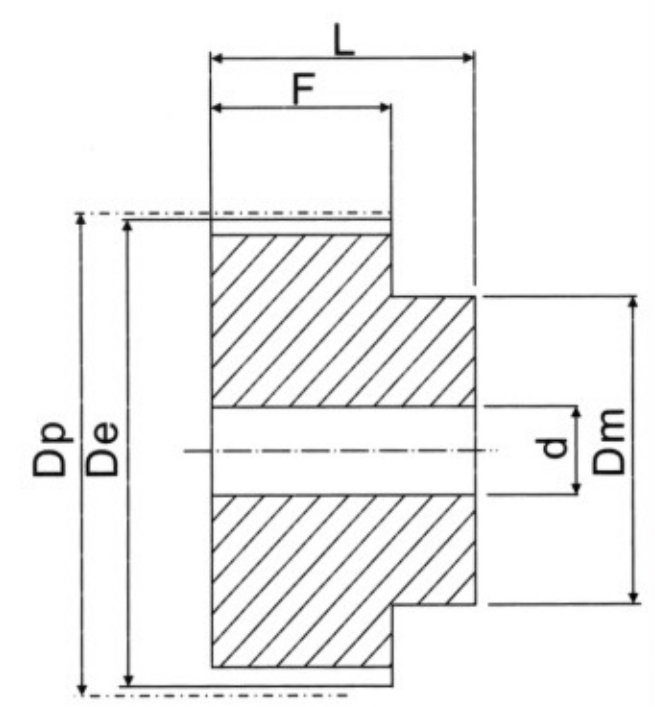

TYPE 型式 2

	貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	27 AT5 12	1F	12		23.0	11	21	27	-
	27 AT5 14	1F	14		25.0	13	21	27	-
	27 AT5 15	1F	15		28.0	16	21	27	-
	27 AT5 16	1F	16		32.0	18	21	27	6
	27 AT5 18	1F	18		32.0	20	21	27	6
	27 AT5 19	1F	19		36.0	22	21	27	6
	27 AT5 20	1F	20		36.0	23	21	27	6
	27 AT5 22	1F	22		38.0	24	21	27	6
	27 AT5 24	1F	24		42.0	26	21	27	6
	27 AT5 25	1F	25		44.0	26	21	27	6
	27 AT5 26	1F	26		44.0	26	21	27	6
	27 AT5 27	1F	27		48.0	30	21	27	6
	27 AT5 28	1F	28		48.0	32	21	27	8
	27 AT5 30	1F	30		51.0	34	21	27	8
	27 AT5 32	1F	32		54.0	38	21	27	8
	27 AT5 36	1F	36		64.0	38	21	27	8
	27 AT5 40	1F	40		66.5	40	21	27	8
	27 AT5 42	1F	42		70.0	40	21	27	8
	27 AT5 44	2	44		-	45	21	27	8
	27 AT5 48	2	48		-	50	21	27	8
	27 AT5 60	2	60		-	65	21	27	8

AT 5 PITCH 節距 5mm FOR BELT WIDTH 帶寬 25mm

	貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	36 AT5 12	1F	12		23.0	11	30	36	-
	36 AT5 14	1F	14		25.0	13	30	36	-
	36 AT5 15	1F	15		28.0	16	30	36	-
	36 AT5 16	1F	16		32.0	18	30	36	6
	36 AT5 18	1F	18		32.0	20	30	36	6
	36 AT5 19	1F	19		36.0	22	30	36	6
	36 AT5 20	1F	20		36.0	23	30	36	6
	36 AT5 22	1F	22		38.0	24	30	36	6
	36 AT5 24	1F	24		42.0	26	30	36	6
	36 AT5 25	1F	25		44.0	26	30	36	6
	36 AT5 26	1F	26		44.0	26	30	36	6
	36 AT5 27	1F	27		48.0	30	30	36	8
	36 AT5 28	1F	28		48.0	32	30	36	8
	36 AT5 30	1F	30		51.0	34	30	36	8
	36 AT5 32	1F	32		54.0	38	30	36	8
	36 AT5 36	1F	36		64.0	38	30	36	8
	36 AT5 40	1F	40		66.5	40	30	36	8
	36 AT5 42	1F	42		70.0	40	30	36	8
	36 AT5 44	2	44		-	45	30	36	8
	36 AT5 48	2	48		-	50	30	36	8
	36 AT5 60	2	60		-	65	30	36	8

同步帶輪系列 TIMING PULLEY

"AT" 型高品質同步帶輪
"AT" HIGH QUALITY TIMING BELT PULLEYS

AT 10 PITCH 節距 10mm FOR BELT WIDTH 帶寬 16mm

	貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	31 AT10 15	1F	15	45.90	51	32	21	31	8
	31 AT10 16	1F	16	49.05	54	35	21	31	8
	31 AT10 18	1F	18	55.45	60	40	21	31	8
	31 AT10 19	1F	19	58.60	66.5	44	21	31	8
	31 AT10 20	1F	20	61.80	66.5	46	21	31	8
	31 AT10 22	1F	22	68.15	75	52	21	31	8
	31 AT10 24	1F	24	74.55	83	58	21	31	8
	31 AT10 25	1F	25	77.70	83	60	21	31	8
	31 AT10 26	1F	26	80.90	87	60	21	31	8
	31 AT10 27	1F	27	84.10	91	60	21	31	8
	31 AT10 28	1F	28	87.25	93	60	21	31	8
	31 AT10 30	1F	30	93.65	97	60	21	31	8
	31 AT10 32	1F	32	100.00	106	65	21	31	10
	31 AT10 36	1F	36	112.75	119	70	21	31	10
	31 AT10 40	1F	40	125.45	131	80	21	31	10
	31 AT10 44	2	44	138.20	-	88	21	31	10
	31 AT10 48	2	48	150.95	-	95	21	31	16
	31 AT10 60	2	60	189.10	-	110	21	31	16

AT 10 PITCH 節距 10mm FOR BELT WIDTH 帶寬 25mm

	貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	40 AT10 15	1F	15	45.90	51	32	30	40	8
	40 AT10 16	1F	16	49.05	54	35	30	40	8
	40 AT10 18	1F	18	55.45	60	40	30	40	8
	40 AT10 19	1F	19	58.60	66.5	44	30	40	8
	40 AT10 20	1F	20	61.80	66.5	46	30	40	8
	40 AT10 22	1F	22	68.15	75	52	30	40	8
	40 AT10 24	1F	24	74.55	83	58	30	40	8
	40 AT10 25	1F	25	77.70	83	60	30	40	8
	40 AT10 26	1F	26	80.90	87	60	30	40	8
	40 AT10 27	1F	27	84.10	91	60	30	40	8
	40 AT10 28	1F	28	87.25	93	60	30	40	8
	40 AT10 30	1F	30	93.65	97	60	30	40	8
	40 AT10 32	1F	32	100.00	106	65	30	40	10
	40 AT10 36	1F	36	112.75	119	70	30	40	10
	40 AT10 40	1F	40	125.45	131	80	30	40	10
	40 AT10 44	2	44	138.20	-	88	30	40	10
	40 AT10 48	2	48	150.95	-	95	30	40	16
	40 AT10 60	2	60	189.10	-	110	30	40	16

同步帶輪系列 TIMING PULLEY

"AT" 型高品質同步帶輪
"AT" HIGH QUALITY TIMING BELT PULLEYS

AT 10 PITCH 節距 10mm FOR BELT WIDTH 帶寬 32mm

	貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	47 At10 18	1F	18	55.45	60	40	37	47	10
	47 AT10 19	1F	19	58.60	66.5	44	37	47	10
	47 AT10 20	1F	20	61.80	66.5	46	37	47	12
	47 AT10 22	1F	22	68.15	75	52	37	47	12
	47 AT10 24	1F	24	74.55	83	58	37	47	12
	47 AT10 25	1F	25	77.70	83	60	37	47	12
	47 AT10 26	1F	26	80.90	87	60	37	47	12
	47 AT10 27	1F	27	84.10	91	60	37	47	12
	47 AT10 28	1F	28	87.25	93	60	37	47	12
	47 AT10 30	1F	30	93.65	97	60	37	47	12
	47 AT10 32	1F	32	100.00	106	65	37	47	12
	47 AT10 36	1F	36	112.75	119	70	37	47	16
	47 AT10 40	1F	40	125.45	131	80	37	47	16
	47 AT10 44	2	44	138.20	-	88	37	47	16
	47 AT10 48	2	48	150.95	-	95	37	47	16
	47 AT10 60	2	60	189.10	-	110	37	47	16

AT 10 PITCH 節距 10mm FOR BELT WIDTH 帶寬 50mm

	貨號 MODEL NO.	型式 TYPE	齒數 TEETH NO.	外徑 OUTER DIA De	擋圈外徑 FLANGE DIA Df	凸臺外徑 HUB DIA Dm	齒厚 TEETH WIDTH F	總厚 HUB LENGTH L	內孔 BORE d
ALUMINIUM 鋁	66 At10 18	1F	18	55.45	60	40	56	66	10
	66 AT10 19	1F	19	58.60	66.5	44	56	66	10
	66 AT10 20	1F	20	61.80	66.5	46	56	66	12
	66 AT10 22	1F	22	68.15	75	52	56	66	12
	66 AT10 24	1F	24	74.55	83	58	56	66	12
	66 AT10 25	1F	25	77.70	83	60	56	66	12
	66 AT10 26	1F	26	80.90	87	60	56	66	12
	66 AT10 27	1F	27	84.10	91	60	56	66	12
	66 AT10 28	1F	28	87.25	93	60	56	66	12
	66 AT10 30	1F	30	93.65	97	60	56	66	12
	66 AT10 32	1F	32	100.00	106	65	56	66	12
	66 AT10 36	1F	36	112.75	119	70	56	66	16
	66 AT10 40	1F	40	125.45	131	80	56	66	16
	66 AT10 44	2	44	138.20	-	88	56	66	16
	66 AT10 48	2	48	150.95	-	95	56	66	16
	66 AT10 60	2	60	189.10	-	110	56	66	16

同步帶輪系列 TIMING PULLEY